


GAI



CB













20W-50W





The Garden Light GAI is finished Die-cast aluminum top cover, aluminum extruded column with surface anti-ageing electrostatic spray processing, super resistance to corrosion, Gaskets in anti-ageing rubber, PC Clear Diffuser. It's as well a great alternative to urban furniture due to its IP66 protection rating and IK08 Impact protection.

Technical Data

Luminaire Type-安裝方式Tipo de luminaria	Pole Mounted with Anchor Bolt地腳螺栓固定Montaje en poste con perno de anclaje			
Power Consumption with LED Driver LED燈具包括LED驅動電源功率 Consumo de energía con controlador de LED	20W	30W	40W	50W
Input Voltage / 輸入電壓 Voltaje de entrada	220 ~ 240VAC (50~60HZ)			
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 1-10V Dimming Driver AC220-240V 50/60HZ 3. Dali Dimming 1-100% Driver AC220-240V 50/60HZ			
Power Factor / 功率因數/Factor de potencia	POWER FACTOR : PF>0.95 TOTAL HARMONIC DISTORTION: THD< 20% Refer to LED Driver data sheet			
Control Protocol-控制協議 Protocolo de Control	1-10V / Dali / Dali 2			
Light Source Brand-光源品牌-Fuente de luz de marca	CREE			
"Lumen Maintenance LM-80 Reported by TM-21"	L70 > 65,000 Hours			
LED Life-LED壽命-La vida del LED	>50,000 hours			
Color Temperature 色溫 Temperatura y color	2700K / 3000K / 4000K/5000K			
Color Rendering Index-顯色指數 Índice de reproducción cromática	• >70 • >80			
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching 3 SCDM 標準偏差配色 3 SCDM Coincidencia de color estándar Desviación			
Beam Angle光束角ángulo de haz	Symmetric Angle: 120°			
Luminaire Efficacy燈具效率 La eficacia de la luminaria	110m/w(2700K)	110m/w(3000K)	120m/w(4000K)	130m/w(5000K)
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	130m/w(2700K)	130m/w(3000K)	150m/w(4000K)	160m/w(5000K)
Housing materials 外殼材料 Materiales de la carcasa	Die-cast aluminum top cover, aluminum extruded column and transparent PCdiffuser 壓鑄鋁頂蓋, 鋁擠壓柱和抗紫外線透明PC散器 Cubierta superior de aluminio fundido a presión, columna de aluminio extruido y difusor de PC transparente anti UV			
Housing Color 外殼顏色 color de la carcasa	Polyester powders Coating (RAL 9005 Black).聚酯粉末塗料(RAL 9005 黑色) Polvos de poliéster Revestimiento (RAL 9005).			
Ingress Protection-防護等級 Protección de ingreso	IP65			
Mech impact protection機械衝擊保護 Protección contra impactos mecánicos	IK08			
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C			
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación			
Dimension 尺寸 Dimensión	Dia 145 x H:2500mm Dia 145 x H:2000mm Dia 145 x H:1500mm Dia 145 x H:800mm			
Certificate Standard Complied 符合安規標準 estándar certificado de cumplimiento	LED Luminaries: IEC/EN 60598-1 ; IEC/EN 60598-2-3; IEC TR 62778; IEC 62031 LED Driver: IEC 61347-1; IEC 61347-2-13; EN 55015; IEC 61000-3-2; IEC 61000-3-3; IEC 61547;EN 62384			
Certification-認證-Certificación	         			

BEAM ANGLE

DIMON
TECHNOLOGY

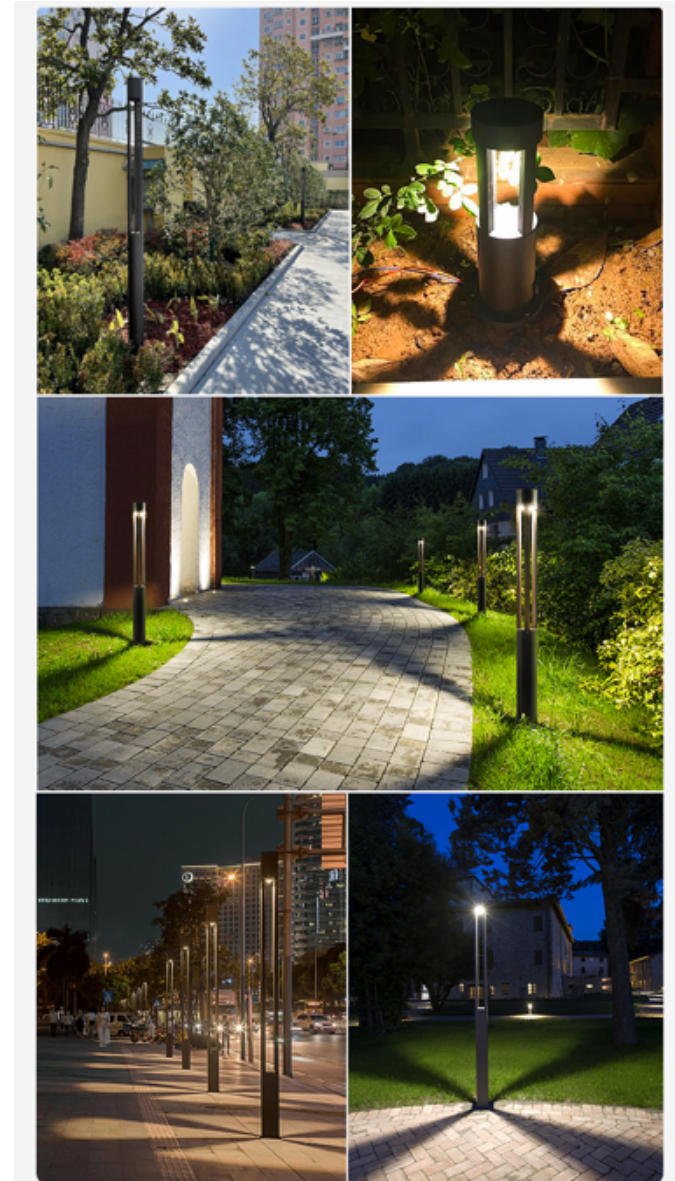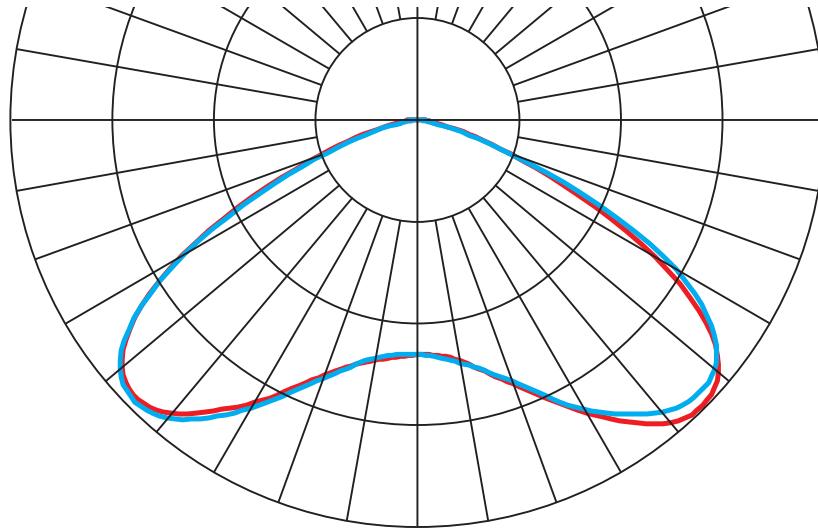



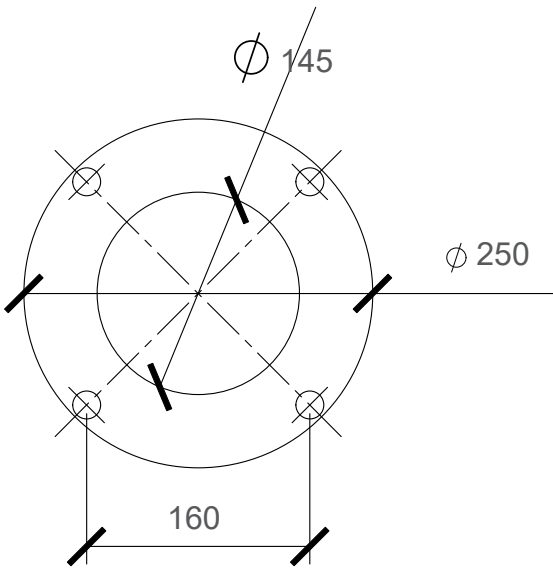


Plate Detail

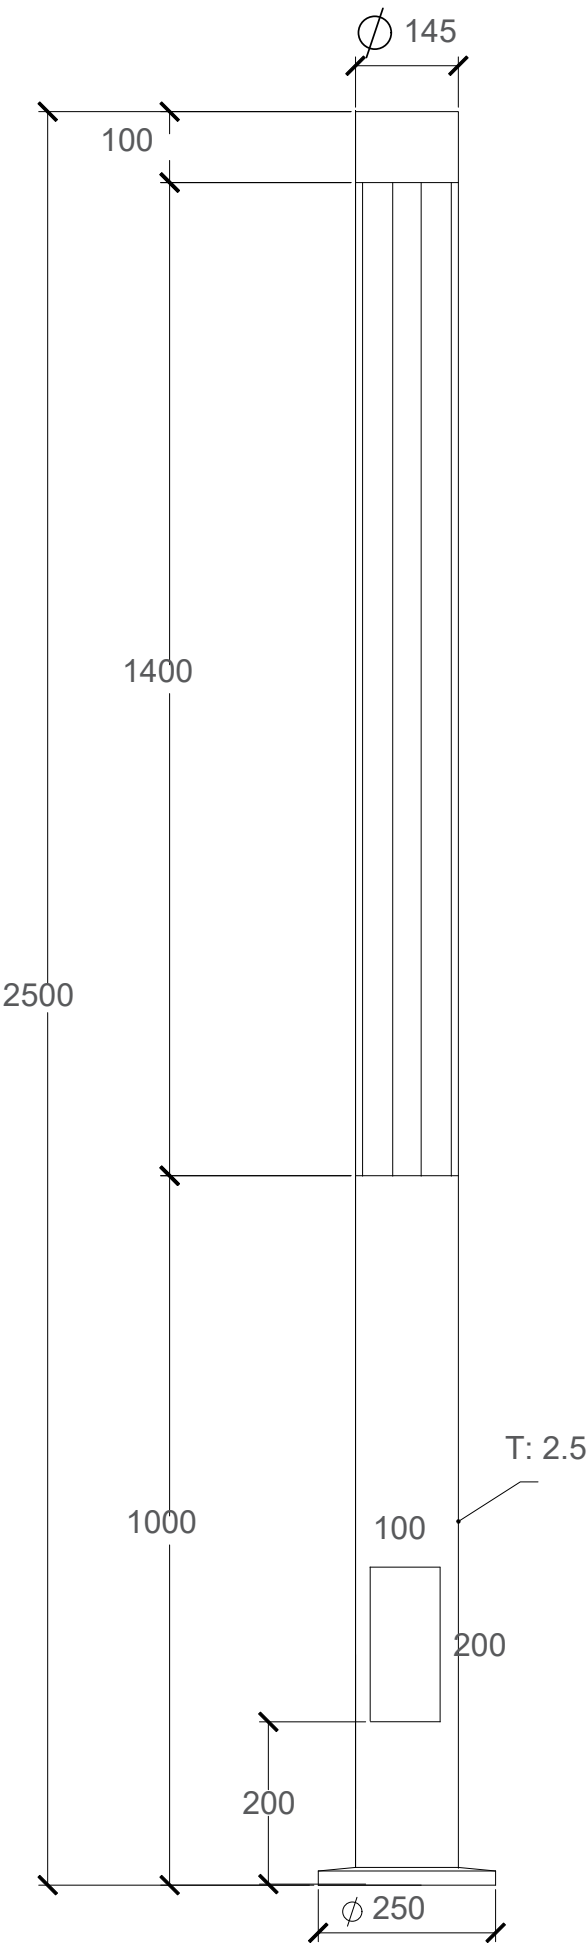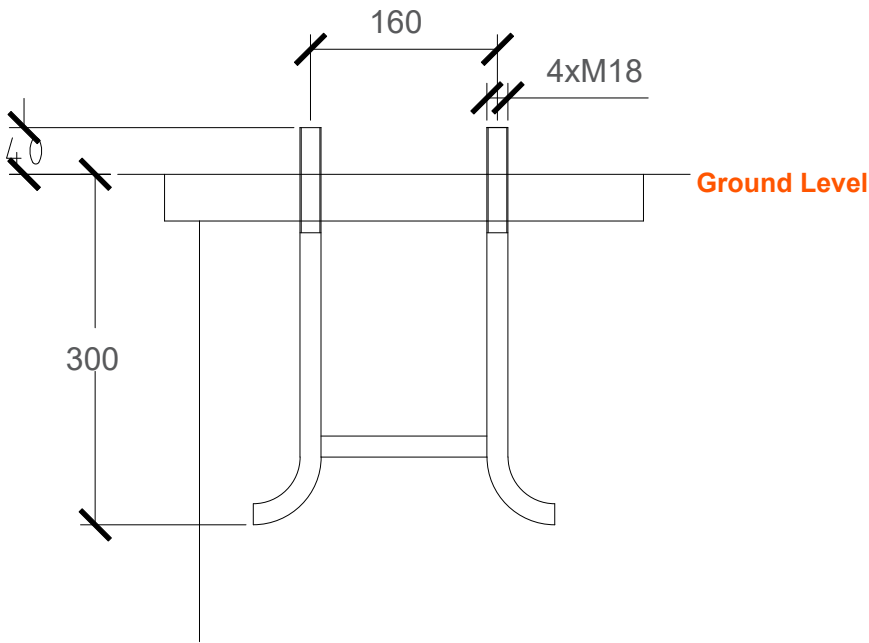

Holding Down Blot Detail