

GALARY-Q

25W-60W IP66



The Garden Light is finished by Die-cast aluminium with separated and integrated LED Driver Box , with surface anti-ageing electrostatic spray processing. It's as well a great alternative to urban furniture due to its IP66 protection rating and IK09 Impact protection. Adopt modular light distribution Lens and PC diffuser.


Technical Data

Luminaire Type- 安裝方式 Tipo de luminaria

Post top ϕ 76mm
 杆安裝 ϕ 76mm
 Poste superior ϕ 76mm

Power Consumption with LED Driver LED燈具包括LED驅動電源功率 Consumo de energía con controlador de LED	25W 35W 60W
Input Voltage / 輸入電壓 Voltaje de entrada	220 ~ 240VAC (50~60HZ)
Control Protocol/控制協議 Protocolo de Control	<ul style="list-style-type: none"> • SW: ON/OFF Switch Driver • AN: 1-10V Dimming Driver • DA: Dali Dimming Driver
Power Factor / 功率因數/Factor de potencia	PF>0.95
Total Harmonic Distortion/總諧波失/Distorsión armónica total	THD<18%
Protection Against Surgers/防護措施/PROTECCIÓN CONTRA LAS PROMOCIONES:	Line-Earth:10KV Line-Line:6KV
Light Source Brand-光源品牌-Fuente de luz de marca	CREE
"Lumen Maintenance LM-80 Reported by TM-21"	L70 > 45,000 Hours
LED Life-LED壽命-La vida del LED	>50,000 hours
Color Temperature 色溫 Temperatura y color	3000K 4000K 5000K
Color Rendering Index-顯色指數 Índice de reproducción cromática	<ul style="list-style-type: none"> • >70 • >80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Beam Angle 光束角 ángulo de haz	A1 A2
Luminaire Efficacy燈具效率 La eficacia de la luminaria	<ul style="list-style-type: none"> • 110 Lm/w(3000K) @CRI >70 ; 120 Lm/w(4000K) @CRI >70 130 Lm/w(5000K) @CRI >70 • 100 Lm/w(3000K) @CRI >80 ; 110 Lm/w(4000K) @CRI >80 120 Lm/w(5000K) @CRI >80
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	<ul style="list-style-type: none"> • 143 Lm/w(3000K) @CRI >70; 163 Lm/w(4000K) @CRI >70; 171 Lm/w(5000K) @CRI >70 • 134 Lm/w(3000K) @CRI >80; 143 Lm/w(4000K) @CRI >80; 153 Lm/w(5000K) @CRI >80
Housing materials 外殼材料 Materiales de la carcasa	Die-cast aluminium and Polycarbonate 壓鑄鋁和聚碳酸酯 Aluminio fundido a presión y policarbonato
Housing Color 外殼顏色 color de la carcasa	Polyester powders Coating (RAL 9005 Black) 聚酯粉末塗料(RAL 9005 啞光黑色) Recubrimiento de polvos de poliéster (RAL 9005 negro)
Ingress Protection-防護等級 Protección de ingreso	IP66
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK09
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de función ambiente	-30 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Dimension 尺寸 Dimensión	DIA 523 X H:537 mm
Certificate Standard Complied 符合安規標準 estándar certificado de cumplimiento	LED Luminaries: IEC/EN 60598-1 ; IEC/EN 60598-2-3; IEC TR 62778; IEC 62031 LED Driver: IEC 61347-1; IEC 61347-2-13; EN 55015; IEC 61000-3-2; IEC 61000-3-3; IEC 61547; EN 62384

Certification-認證-Certificación



Project	Fixture#	Date
		Firm



Ordering Information



Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [GALARY-Q-60W](#)


GALARY-Q - - _____
POWER
CONSUMPTION

POWER CONSUMPTION	
Code	Description
25W	25W
35W	35W
60W	60W

BEAM ANGLE

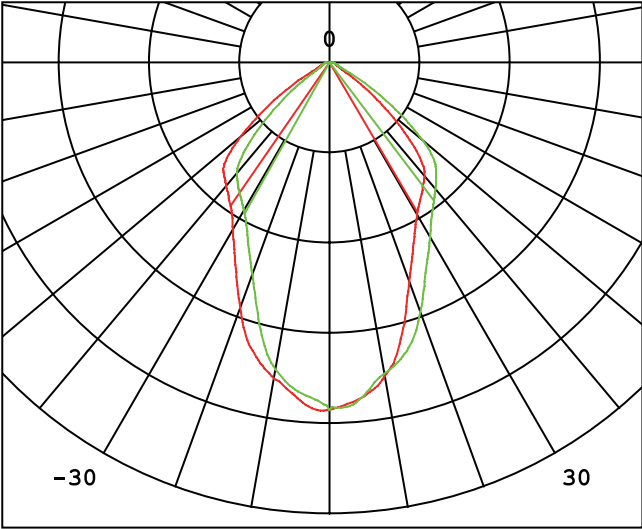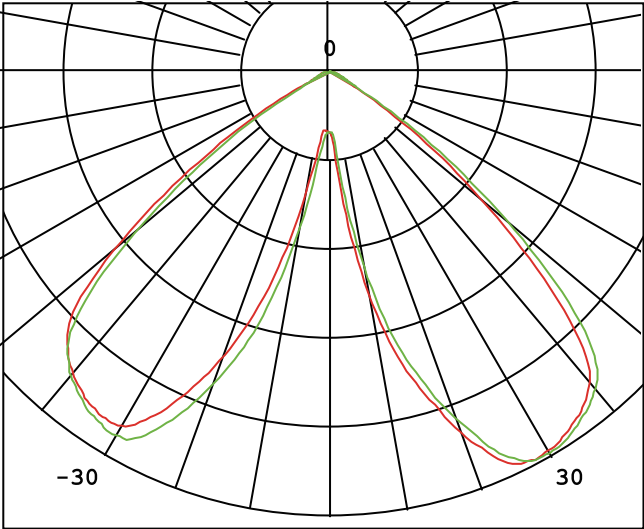

Technical Drawing

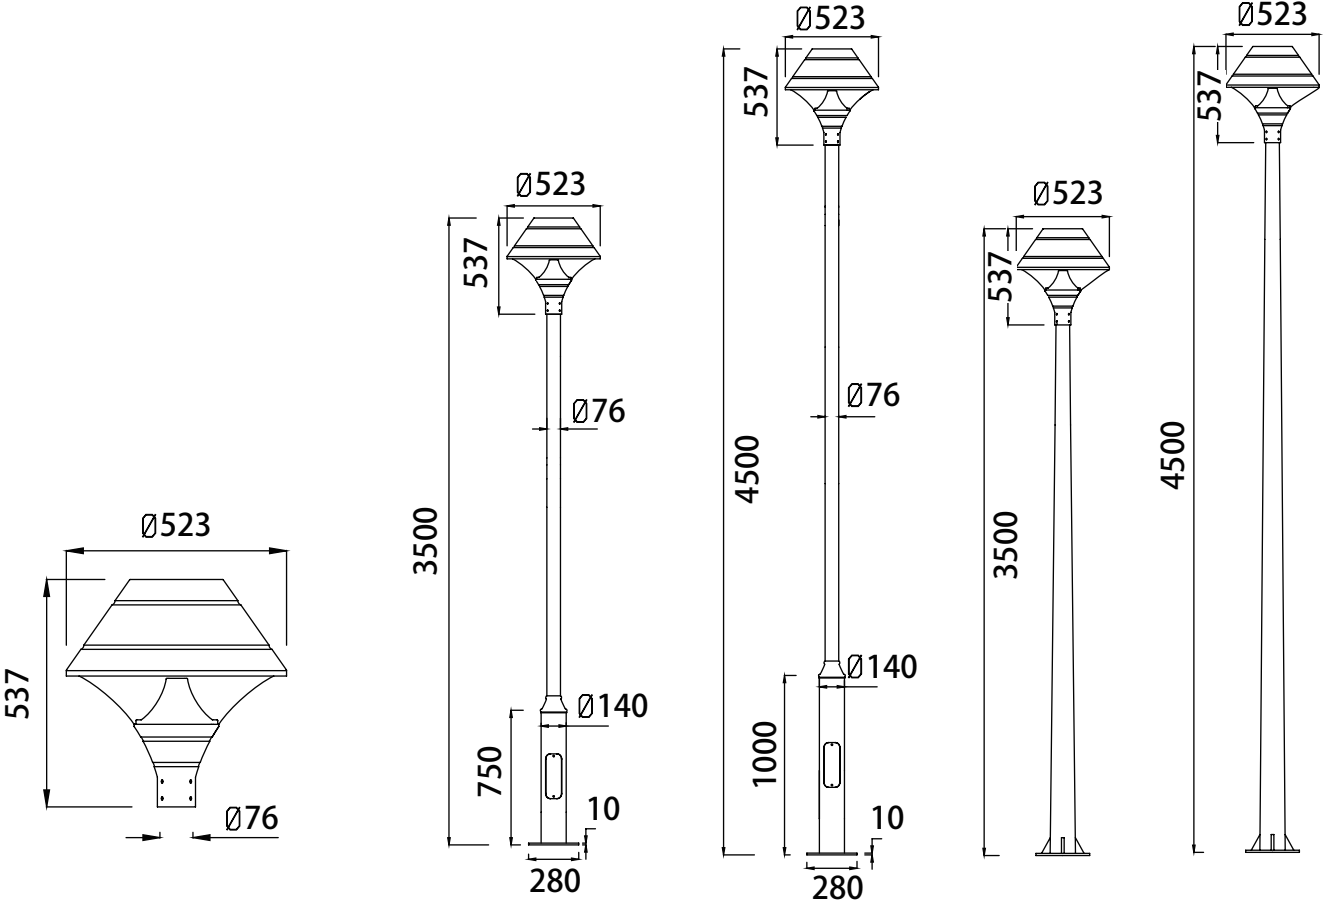

Unit: mm