

## GLAXO-J&Q

6W-10W A60 Classic filament LEDbulbs



Amber



Frosted



Milky



Top Gold







Top matt black



- Classic filament LEDbulbs combine the familiar shapes of classic incandescent bulbs with the benefits of the long lasting LED technology.
- They deliver beautiful, decorative warm-white light while saving around 90% on energy costs compared with traditional light bulbs
- UV- and IR-free light

### Technical Data

Cap-Base燈座Tapa-Base	E27
Dimension-尺寸-Dimensión	G80 Dia 80 x H: 117mm
Power Consumption Max-燈具功率 Consumo de energía Max	<ul style="list-style-type: none"> <li>• 6W</li> <li>• 8W</li> <li>• 10W</li> </ul>
Input Voltage-輸入電壓-Voltaje de entrada POWER FACTOR功率因數 FACTOR DE POTENCIA	AC220-240V 50/60HZ >0.5
Switching Cycle開關週期 Ciclo de conmutación	> 20,000 times
Controls and dimming控制和調光 Controles y atenuación	Non-Dimmable非調光 Sin atenuación or Dimmable- Leading Edge Triac Dimming前沿可控矽調光Atenuación triac de vanguardia
Beam Angle光束角ángulo de haz	360°
Nominal Lifetime (Nom)壽命-La vida	> 35,000hours
Color Temperature -色溫 Temperatura del color	<ul style="list-style-type: none"> <li>• 2200K</li> <li>• 2700K</li> <li>• 3000K</li> <li>• 4000K</li> <li>• 5000K</li> </ul>
Color Rendering Index-顯色指數 Índice de reproducción cromática	<ul style="list-style-type: none"> <li>• &gt; 80</li> <li>• &gt; 90</li> </ul>
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 6 SCDM 標準偏差配色 < 6 SCDM Coincidencia de color estándar Desviación
Luminaire Efficacy燈具效率 La eficacia de la luminaria	<ul style="list-style-type: none"> <li>• 90lm/w(2200K)</li> <li>• 90lm/w(2700K),</li> <li>• 90lm/w(3000K),</li> <li>• 100lm/w(4000K),</li> <li>• 110lm/w(5000K),</li> </ul>
LLMF At End Of Nominal Lifetime (Nom) 額定壽命結束時的 LLMF (Nom) LLMF al final de la vida útil nominal (Nom)	L70>35,000hours
Housing materials-外殼材料 Materiales de la carcasa	Glass 玻璃Vidrio
Housing Color外殼顏色 color de la carcasa	<ul style="list-style-type: none"> <li>• Amber Glass 琥珀色玻璃Vidrio ámbar</li> <li>• Top Gold 金頂 arte superior Dorada</li> <li>• Top Matt black 黑頂 Parte superior Negro mate</li> <li>• Clear Glass透明玻璃 Vidrio transparente</li> <li>• Milky Glass 乳白色玻璃 Vidrio lechoso</li> <li>• Frosted Glass 磨砂玻璃Vidrio esmerilado</li> </ul>
Ingress Protection-防護等級 Protección de ingreso	IP20
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C To +50 °C
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC 62560 ; IEC 62493; IEC/TR 62778 IEC62471; RoHS LED Driver: EN 55015 / EN 61000-3-2 / EN 61347-1 / EN 61347-2-13 / EN 61547
Certification-認證-Certificación	   

Project	Fixture#	Date
		Firm



## Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [GLAXO-J](#)

GLAXO-     -     \_\_\_\_\_  
Power Consumption

Power Consumption	
Code	Description
J	6W
Q	8W
Z	10W

# BEAM ANGLE

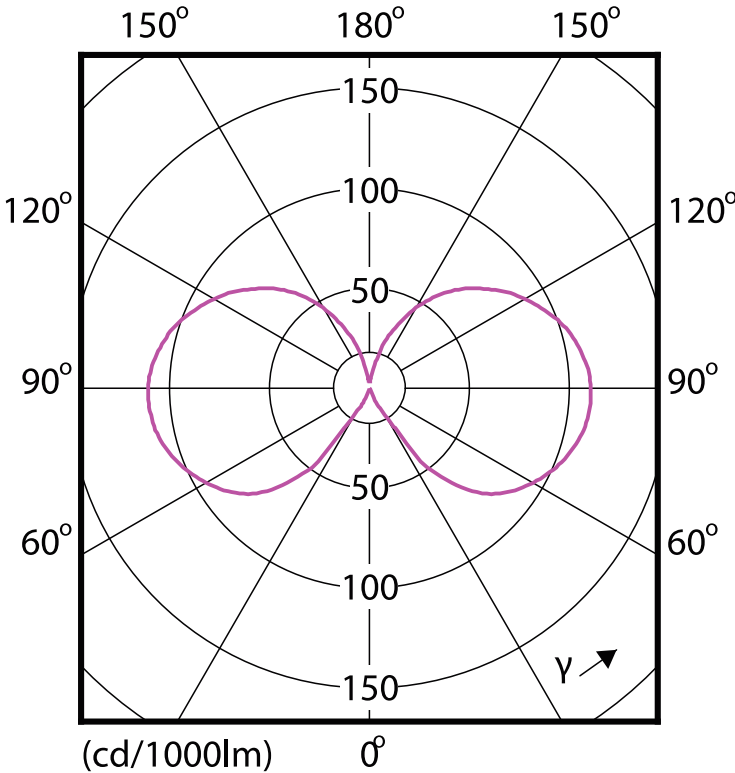

Technical Drawing



Unit: mm