

GLAXO-K&W

3W-6W A60 Classic filament LEDbulbs



A60



A60 Clear



A60 Amber



A60 Milky



A60 Frosted



A60 Top matt black



A60 Top Rose Gold



A60 Top Gold



A60 Top Silver

- Classic filament LEDbulbs combine the familiar shapes of classic incandescent bulbs with the benefits of the long lasting LED technology.
- They deliver beautiful, decorative warm-white light while saving around 90% on energy costs compared with traditional light bulbs
- UV- and IR-free light

Technical Data

Cap-Base燈座Tapa-Base	E27
Dimension-尺寸-Dimensión	A60 Dia 60 x H : 105mm
Power Consumption Max-燈具功率 Consumo de energía Max	<ul style="list-style-type: none"> • 4W • 6W • 8W • 10W
Input Voltage-輸入電壓-Voltaje de entrada POWER FACTOR功率因數 FACTOR DE POTENCIA	AC220-240V 50/60HZ >0.5
Switching Cycle開關週期 Ciclo de conmutación	> 20,000 times
Controls and dimming控制及調光 Controles y atenuación	Non-Dimmable非調光 Sin atenuación or Dimmable- Leading Edge Triac Dimming前沿可控矽調光Atenuación triac de vanguardia
Beam Angle光束角ángulo de haz	360°
Nominal Lifetime (Nom)壽命-La vida	> 35,000hours
Color Temperature -色溫 Temperatura del color	<ul style="list-style-type: none"> • 2200K • 2700K • 3000K • 4000K • 5000K
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80 > 90
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 6 SCDM 標準偏差配色 < 6 SCDM Coincidencia de color estándar Desviación
Luminaire Efficacy燈具效率 La eficacia de la luminaria	<ul style="list-style-type: none"> • 90lm/w(2200K) • 90lm/w(2700K), • 90lm/w(3000K), • 100lm/w(4000K), • 110lm/w(5000K),
LLMF At End Of Nominal Lifetime (Nom) 額定壽命結束時的 LLMF (Nom) LLMF al final de la vida útil nominal (Nom)	L70>35,000hours
Housing materials-外殼材料 Materiales de la carcasa	Glass 玻璃Vidrio
Housing Color外殼顏色 color de la carcasa	<ul style="list-style-type: none"> • Amber Glass 琥珀色玻璃Vidrio ámbar • Top Silver 銀頂Parte superior Plata • Top Gold 金頂 arte superior Dorada • Top Matt black 黑頂 Parte superior Negro mate • Clear Glass透明玻璃 Vidrio transparente • Milky Glass 乳白色玻璃 Vidrio lechoso • Frosted Glass 磨砂玻璃Vidrio esmerilado
Ingress Protection-防護等級 Protección de ingreso	IP20
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C To +50 °C
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires:IEC 62560 ;IEC 62493;IEC/TR 62778 IEC62471;RoHS LED Driver: EN 55015 / EN 61000-3-2 / EN 61347-1 / EN 61347-2-13 / EN 61547

Certification-認證-Certificación



Project	Fixture#	Date
		Firm



Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code:

GLAXO- - _____
Power Consumption

Power Consumption	
Code	Description
K	4W
W	6W
H	8W
V	10W

BEAM ANGLE

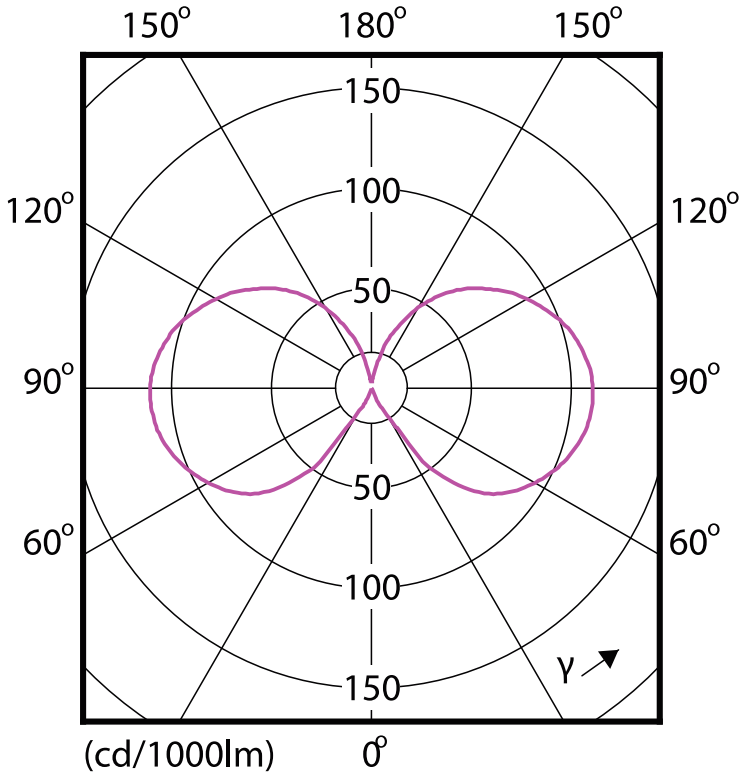

Technical Drawing



Unit: mm