






HOLO

50-200W IP65



- Compatible with Strip-shaped and Round Power Supplies
- Power and CCT switchable
- Low Glare, UGR<22
- Emergency function
- Up to 190lm/w for optional
- 60°/90°/120° beam angle for different demand
- Smooth Lamp Body & Dust Free & Low Glare

Technical Data

Luminaire Type- 安裝方式 Tipo de luminaria	Mouting by Bracket or Hanging by ring 安裝支架固定或者吊裝 Soporte de montaje fijo o elevación
Power Consumption with LED Driver LED燈具包括LED驅動電源功率 Consumo de energía con controlador de LED	<ul style="list-style-type: none"> • Dia 263mm : 60W 80W 100W • Dia 305mm : 120W 150W • Dia 360mm : 180W 200W
Input Voltage / 輸入電壓 Voltaje de entrada	220-240VAC/50-60HZ
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Constant Current LED Driver: Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC 220-240V 50/60HZ 2. 1-10V Dimming Driver (1%-100%) AC220-240V 50/60HZ 3. Dali 1 or Dali 2 Dimming Driver(1%-100%) AC220-240V 50/60H 4.Motion Sensor
LED Driver Features Constant Current LED Driver: 驅動特性-恆流LED驅動器 Funciones del controlador de LED	POWER FACTOR : PF>0.9 or PF >0.95 @ Full Load TOTAL HARMONIC DISTORTION: THD< 20%
Control Protocol-控制協議Protocolo de Control	1-10V / Dali / ZIGBEE Wireless Control
Protection Against Surgers/防護措施/PROTECCIÓN CONTRA LAS PROMOCIONES:	6kV line-line,4kV line-earth
Light Source Brand-光源品牌-Fuente de luz de marca	LUMILEDS
"Lumen Maintenance LM-80 Reported by TM-21"	L70 > 54,000 Hours
Color Temperature 色溫 Temperatura y color	3000K 4000K 5000K 5700K
Color Rendering Index-顯色指數 Índice de reproducción cromática	>70 or >80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Beam Angle光束角ángulo de haz	60° 90° 120°
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	Standard Series <ul style="list-style-type: none"> • 120 Lm/w@ 3000K 130 Lm/w@ 4000K • 135 Lm/w@ 5000K 135 Lm/w@ 6500K • Advance Series <ul style="list-style-type: none"> • 140 Lm/w@ 3000K 150 Lm/w@ 4000K • 155 Lm/w@ 5000K 155 Lm/w@ 6500K • High Efficiency Series @ CRI 70 <ul style="list-style-type: none"> • 160 Lm/w@ 3000K 180 Lm/w@ 4000K • 190Lm/w@ 5000K 190 Lm/w@ 6500K
Housing materials外殼材料 Materiales de la carcasa	Die-cast aluminium and Polycarbonate Lens 壓鑄鋁和聚碳酸酯透鏡 Aluminio fundido a presión y policarbonato
Housing Color外殼顏色color de la carcasa	Matte Black 啞光黑色 Negro mate
Ingress Protection-防護等級 Protección de ingreso	IP65
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Mech impact protection機械衝擊保護 Protección contra impactos mecánico	IK09
Operating Humidity -工作濕度Humedad de funcionamiento	0~100%, non-condensing-不結霜sin condensación
Dimension(with Ring) / 尺寸(包含吊環) / Dimensión (con anillo)	Refer to Drawing
Net Weight 淨重 Peso Neto +/- 5%	2.3 Kg for 50W-100W 3.3 kg for 120W-150W 3.6kg for 180W-200W
Certificate Standard Complied 符合安規標準 estándar certificado de cumplimiento	LED Luminaries: IEC 60598-1:2017 ; IEC 60598-2-1:1987; IEC TR 62778:2014 (RG1); IEC 62031:2014(LED Modul); IEC 61058-2000 (Sensor); ROHS LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 61347-2-13; EN 55015; EN 61000-3-2;EN 61000-3-3; EN 61547;EN 62384
Certification-認證-Certificación	    

Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [HOLO-100W](#)

HOLO - - _____
POWER
CONSUMPTION


POWER CONSUMPTION	
Code	Description
60W	60W @ Dia 263mm
80W	80W @ Dia 263mm
100W	100W @ Dia 263mm
120W	120W @ Dia 306mm
150W	150W @ Dia 306mm
180W	180W @ Dia 360mm
200W	200W @ Dia 360mm



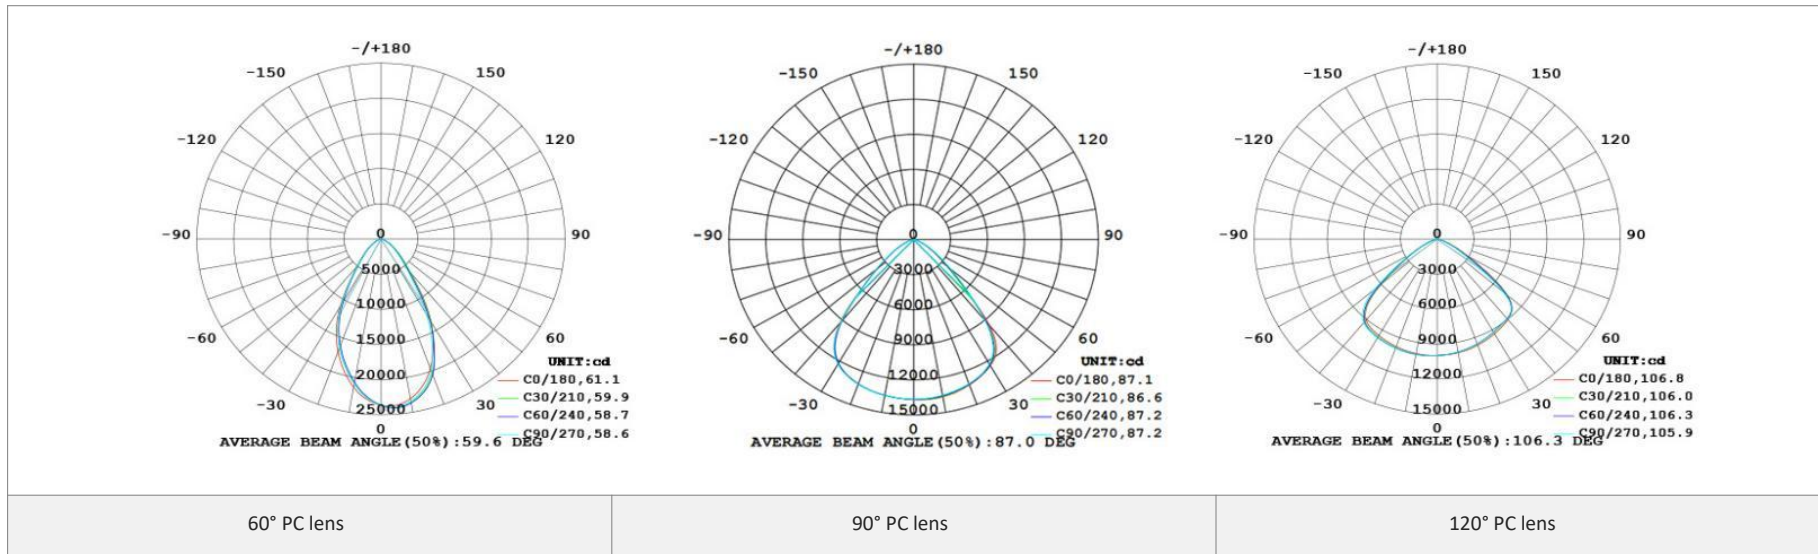BEAM ANGLE



Technical Drawing

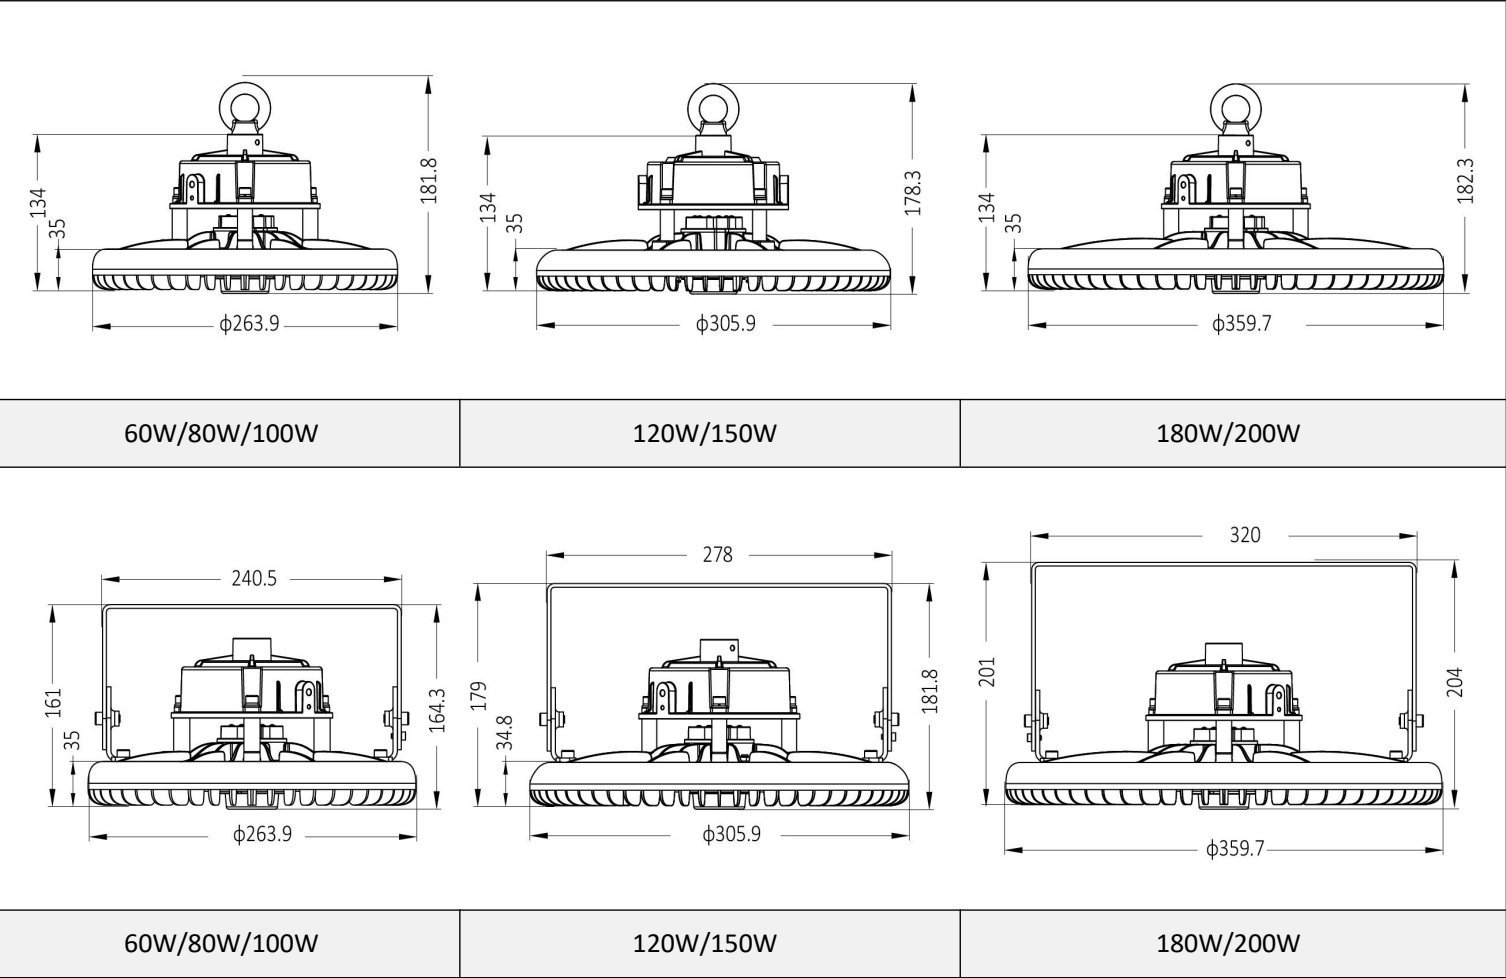

Mounting & Accessories



Eye Bolt
Model: M10
Steel; Black



Bracket
Model:
Steel; Black



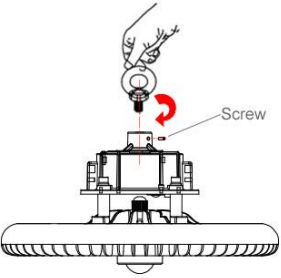
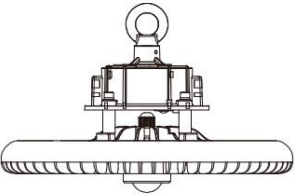
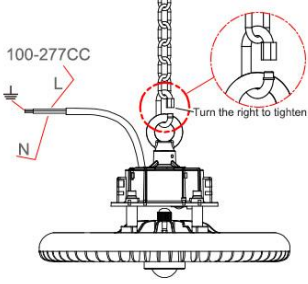
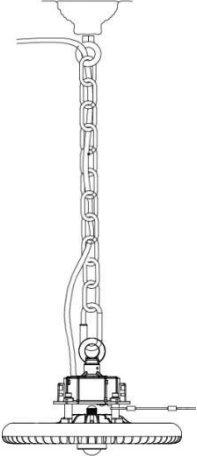
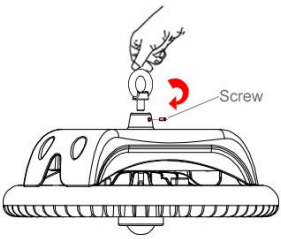
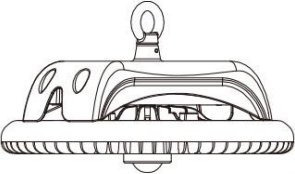
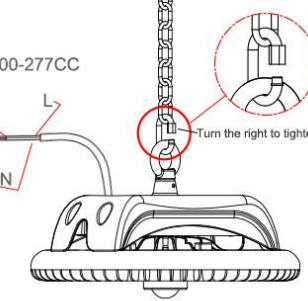
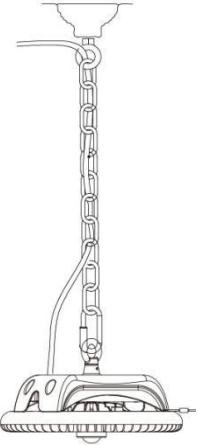
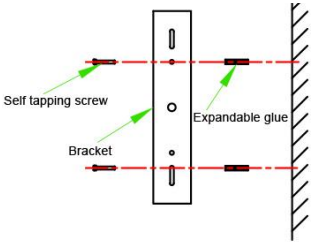

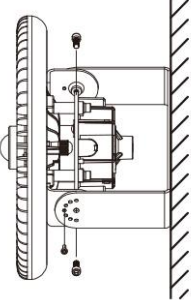
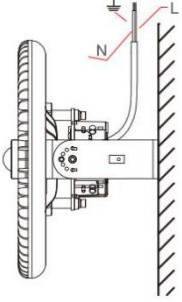
Anti Glare Kit
Model:
Plastic; White



Safety Rope
Model:
Stainless Steel; black

Unit: mm

Installation

<p>Circular Power Supply</p> 		<p>100-277CC</p> 	
<p>Install the ring and tighten the screws</p>		<p>Hang on the hook and connect the power cord</p>	
<p>Strip-shaped Power Supply</p> 		<p>100-277CC</p> 	
<p>Install the ring and tighten the screws</p>		<p>Hang on the hook and connect the power cord</p>	
<p>Bracket installation</p> 			
<p>Mounting bracket</p>	<p>Align the with the hole</p>	<p>Install screws</p>	<p>Connect the power cord</p>