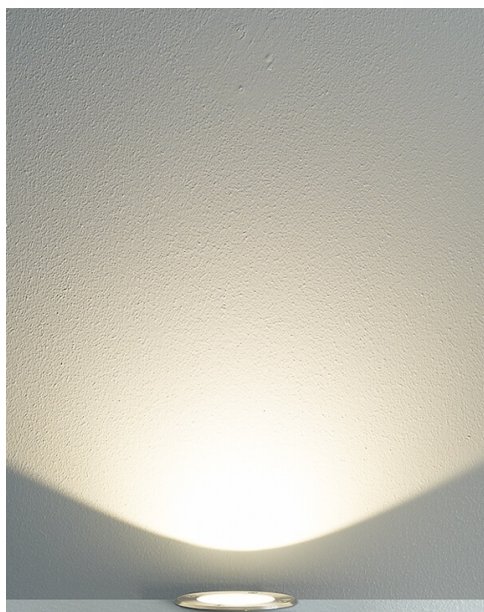







INCARY-X

5M&7W IP68 Dia125mm



- Stainless steel cover in 4mm thickness, body in die-cast aluminium
- Tempered clear glass in 8mm thickness
- Silicon rubber gasket
- Recessed plastic box
- 500kg static weight allowed

Technical Data

Luminaire Type 安裝方式/Tipo de luminaria	Recessed In-Ground Type 內嵌式埋燈 Empotrada en el suelo del Tipo Ceiling Recessed 暗裝 Empotrado en el techo
Power Consumption Max 燈具功率 Consumo de energía Max	• 5W • 7W
Input Voltage 輸入電壓 Voltaje de entrada	AC220-240V 50/60Hz
LED Driver Type LED 驅動款式 Tipo de controlador LED	Integrated -type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch
Control Protocol 控制協議/Protocolo de Control	N/A
Beam Angle 光束角/ángulo de haz	24°
Light Source Brand/光源品牌 Fuente de luz de marca	CREE
"Lumen Maintenance LM-80 Reported by TM-21"	L70(10k) > 60,000 hrs
LED Life/LED 壽命 La vida del LED	>60,000 hours
Color Temperature / 色溫 /Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index/顯色指數 Índice de reproducción cromática	>80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	Milky Glass Diffuser 60 Lm/w(2700K), 65 Lm/w(3000K), 70 Lm/w(4000K), 70 Lm/w(5000K), 70 Lm/w(6500K), Clear Glass Diffuser 80 Lm/w(2700K), 80 Lm/w(3000K), 90 Lm/w(4000K), 100 Lm/w(5000K), 100Lm/w(6500K),
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	120 Lm/w(2700K), 130 Lm/w(3000K), 140 Lm/w(4000K), 140Lm/w(5000K), 140 Lm/w(6500K),
Housing materials/外殼材料 Materiales de la carcasa	Die cast aluminium , 8mm thick tempered glass wiht Stainless Steel Cover and Silicon rubber gasket 壓鑄鋁, 8 毫米厚鋼化玻璃, 不銹鋼蓋和矽橡膠墊圈 Aluminio fundido a presión, vidrio templado de 8 mm de espesor con cubierta de acero inoxidable y junta de caucho de silicona
Housing Color/ 外殼顏色 Color de la carcasa	Stainless Steel Cover 不銹鋼蓋 de la cubierta de acero inoxidable
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Ingress Protection/ 防護等級 Protección de ingreso	IP68
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK10
Pressure load 壓力負荷 Carga de presión	500 kg
Dimension-尺寸-Dimensión	• Refer to the Drawing 請參考圖紙/Consulte el dibujo
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: LVD: IEC 60598-1; IEC 60598-2-1; IEC62471; IEC 62031; IEC62471, ROHS TM21-L70 LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3; IEC/EN61574; EN 55015 ; IEC /EN 62384
Certification-認證-Certificación	   

Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [INCARY-5W](#)

INCARY - _____
Power Consumption

Power Consumption	
Code	Description
5W	5W
7W	7W



Beam Angle

