






## INCHERY S



- Ingress Protection: IP68 Mech impact protection: IK10
- 316 stainless steel body and frame.
- Higher hardened tempered glass
- No photo-biological risk, in accordance with EN
- 62471:2008. All external screw are in 316 stainless steel.


## Technical Data

Luminaire Type-安裝方式/Tipo de luminaria	Surface Mounted and Rotated +/- 90 degree 表面安裝和旋轉 +/- 90 度 Montado en superficie y girado +/- 90 grados
Power Consumption with LED Driver LED燈具包括LED驅動電源功率 Consumo de energía con controlador de LED	• Dia 97mm : 4W • Dia 140mm: 12W • Dia 170mm : 25W
Input Voltage / 輸入電壓 Voltaje de entrada	• DC24V
Power Factor / 功率因數/Factor de potencia	PF>0.90
Light Source Brand-光源品牌-Fuente de luz de marca	CREE
"Lumen Maintenance LM-80 Reported by TM-21"	L70(10k) > 63,500 hrs
LED Life-LED壽命-La vida del LED	>50,000 hours
Color Temperature and Color 色溫 and 顏色 Temperatura y color del color	• 2700K 3000K 4000K 5000K
Color Rendering Index-顯色指數 Índice de reproducción cromática	>80 >90
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Beam Angle/光束角/ángulo de haz	25° 55°
Luminaire Efficacy燈具效率 La eficacia de la luminaria	• 90 Lm/w (2700K) 90Lm/w (3000K) 100 Lm/w (4000K) 110 Lm/w (5000K)
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	130 Lm/w (2700K) 130Lm/w (3000K) 140 Lm/w (4000K) 150 Lm/w (5000K)
Housing materials外殼材料 Materiales de la carcasa	Stainless Steel body with tempered glass 鋼化玻璃不銹鋼燈身 Cuerpo de acero inoxidable con vidrio templado
Housing Color 外殼顏色 color de la carcasa	Stainless Steel 不銹鋼Acero inoxidable
Ingress Protection-防護等級 Protección de ingreso	IP68
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK10
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Dimension尺寸Dimensión	Refer to Technical Drawing 請參閱技術圖紙Consulte el dibujo técnico
Certificate Standard Complied 符合安規標準 estándar certificado de cumplimiento	LED Luminaries: IEC 60598-1;IEC 60598-2-5;RoHS LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574;EN 55015
Certification-認證-Certificación	   




# BEAM ANGLE




25°

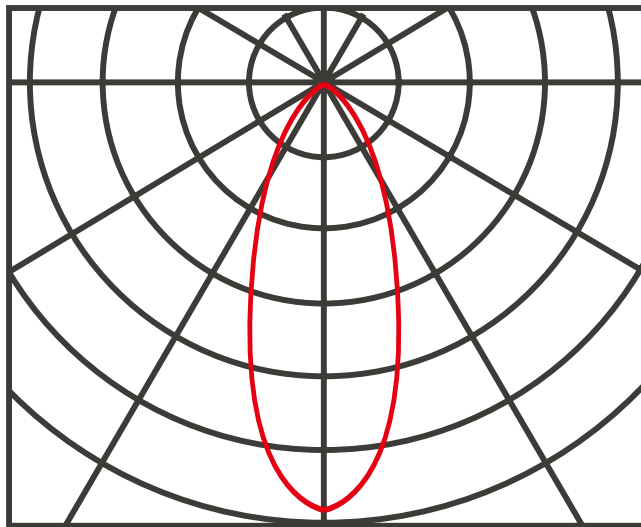

55°

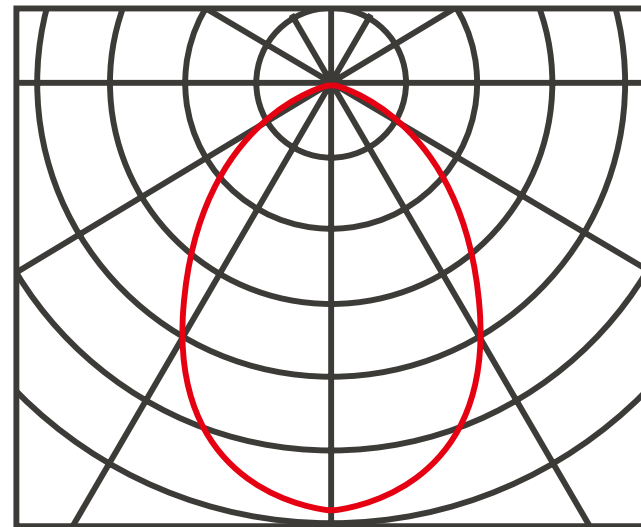

Technical Drawing



Unit: mm