





INCHERY T

3W-9W IP68



- Ingress Protection: IP68 Mech impact protection: IK08
- 316 stainless steel body and frame.
- Higher hardened tempered glass
- No photo- biological risk, in accordance with EN 62471:2008.
- All external screws are in 316 stainless steel.

Technical Data

Luminaire Type-安裝方式/Tipo de luminaria	Surface Mounted and Rotated +/- 45degree 表面安裝和旋轉 +/- 45 度 Montado en superficie y girado +/- 45 grados
Power Consumption with LED Driver LED燈具包括LED驅動電源功率 Consumo de energía con controlador de LED	• 3W (3x1W) • 6W (3x2W) • 9W (3x3W)
Input Voltage / 輸入電壓 Voltaje de entrada	• DC24V • DC24V +DMX512
Control Protocol/控制協議/Protocolo de Control	DMX512 Integrated DMX512 decoder
Power Factor / 功率因數/Factor de potencia	PF>0.90
Light Source Brand-光源品牌-Fuente de luz de marca	OSRAM
"Lumen Maintenance LM-80 Reported by TM-21"	L70(10k) > 63,500 hrs
LED Life-LED壽命-La vida del LED	>50,000 hours
Color Temperature and Color 色溫和顏色 Temperatura y color del color	• 2700K 3000K 4000K 5000K • RGB • RGBW (3000K 4000K 5000K)
Color Rendering Index-顯色指數 Índice de reproducción cromática	>80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Beam Angle/光束角/ángulo de haz	15° 25° 36°
Luminaire Efficacy燈具效率 La eficacia de la luminaria	90 Lm/w (2700K) 90Lm/w (3000K) 100 Lm/w (4000K) 110 Lm/w (5000K) 45Lm/w RGB 65Lm/w RGBW
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	130 Lm/w (2700K) 130Lm/w (3000K) 140 Lm/w (4000K) 150 Lm/w (5000K) 80Lm/w RGB 100Lm/w RGBW
Housing materials外殼材料 Materiales de la carcasa	Stainless Steel body with tempered glass 鋼化玻璃不銹鋼燈身 Cuerpo de acero inoxidable con vidrio templado
Housing Color 外殼顏色 color de la carcasa	Stainless Steel 不銹鋼Acero inoxidable
Ingress Protection-防護等級 Protección de ingreso	IP68
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK08
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Dimension尺寸Dimensión	Refer to Technical Drawing 請參閱技術圖紙Consulte el dibujo técnico
Certificate Standard Complied 符合安規標準 estándar certificado de cumplimiento	LED Luminaries: IEC 60598-1;IEC 60598-2-5;RoHS LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574;EN 55015
Certification-認證-Certificación	   

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [INCHERY-3W](#)

INCHERY - - _____
POWER
CONSUMPTION


POWER CONSUMPTION	
Code	Description
3W	3W (3x1W)
6W	6W (3x2W)
9W	9W (3x3W)

BEAM ANGLE


15°

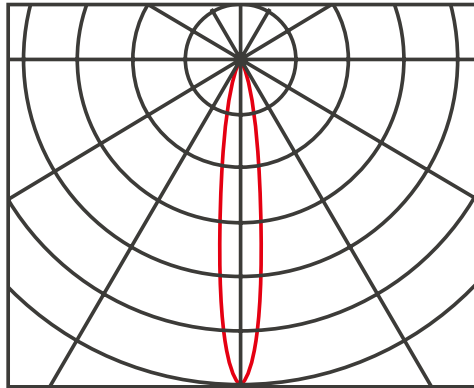


25°

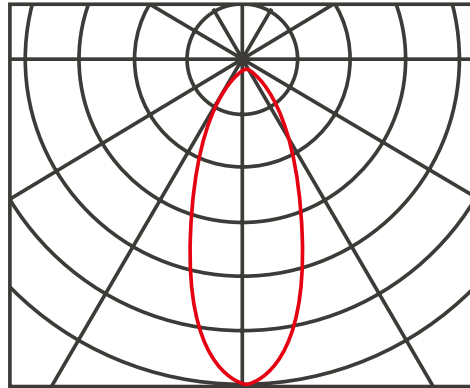

36°

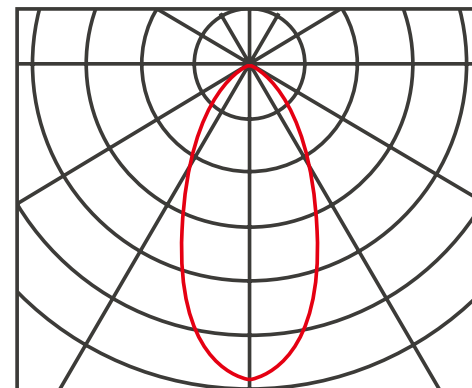

Technical Drawing

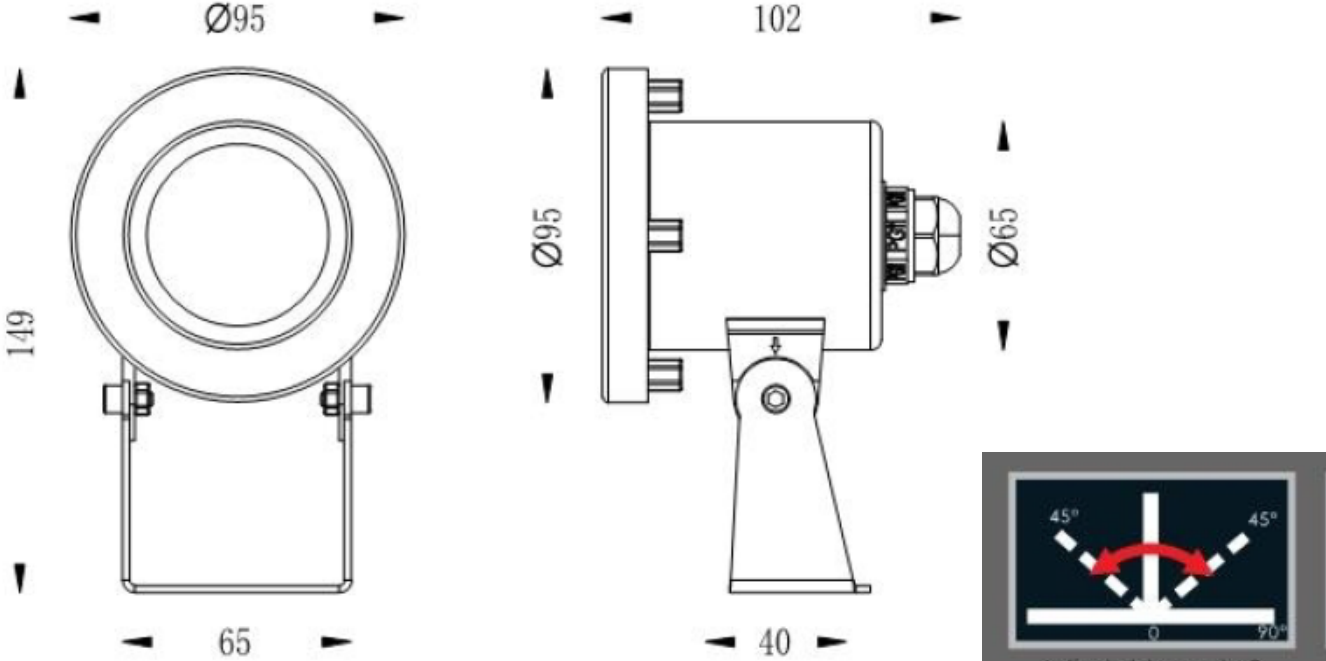

Unit: mm