

LABITY Slim

W:65xH:47xL:---mm



CB



IP20



0-10V



- LED LINEAR CEILING LIGHT. Housing: high quality aluminium alloy, electrostatic thermo-painting,
- PC Polycarbonate diffuser system for Anti Glare Light distribution
- Integrated-Type 1-10V, DALI, Constant current control gear.

LABITY Slim








W:65xH:47xL:---mm

DIMON
TECHNOLOGY

Technical Data

Luminaire Type-安裝方式Tipo de luminaria

Surface & Suspended Mounted明裝或吊裝 superficie y suspendido montado

Dimension-尺寸-Dimensión (L x W x H)	696x 65x 47 mm 1296x 65x 47 mm	996x 65x 47 mm 1596x 65x 47 mm
Power Consumption Max-燈具功率 Consumo de energía Max	696mm : 20W 25W 996mm : 28W 30W 1296mm : 36W 40W 1596mm : 40W 45W 50W	
Input Voltage-輸入電壓-Voltaje de entrada	100-240 VAC 50/60HZ	
Power Factor / 功率因數/Factor de potencia	PF>0.95 or PF:>0.95 Detail refer to LED Driver data sheet	
Total Harmonic Distortion/總諧波失/Distorsión armónica total	THD <20% Detail refer to LED Driver data sheet	
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 1-10V Dimming Driver AC220-240V 50/60HZ 3. Dali Dimming Driver 1-100% AC220-240V 50/60HZ 4. Remoted Type Emergency Backup >2 hours or >3 hours @ < 12charger hours應急電池/Copia de seguridad de emergencia	
Control Protocol-控制協議 Protocolo de Control	1-10V or Dali	
Beam Angle光束角ángulo de haz	120°	
Light Source Brand-光源品牌-Fuente de luz de marca	OSRAM LED	
LED Life-LED壽命-La vida del LED	>60,000 hours	
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K	
Color Rendering Index-顯色指數 Índice de reproducción cromática	• > 83 • > 90	
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SDCM標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM	
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	100 Lm/w(2700K), 100 Lm/w(3000K), 110 Lm/w(4000K), 120 Lm/w(5000K), 120 Lm/w(6500K),	
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	130 Lm/w(2700K), 130 Lm/w(3000K), 140 Lm/w(4000K), 150 Lm/w(5000K), 150 Lm/w(6500K),	
Housing materials-外殼材料 Materiales de la carcasa	Aluminium Alloy and Opal Polycarbonate 鋁合金和乳白PC罩 Aleación de aluminio y policarbonato o	
Housing Color外殼顏色 color de la carcasa	Matte white / Matte black / Matte silver 啞光白色 / 啞光黑色 / 啞光銀色 Blanco mate / Matte black / Astilla mate	
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C	
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación	
Ingress Protection-防護等級 Protección de ingreso	IP20	
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: LVD: IEC/EN 60598-1;EN / IEC/EN 60598-2-1;IEC62471;IEC/EN 62031; IEC/EN 62493 ; IEC/EN 62471 LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574;EN 55015 ; IEC /EN 62384	
Certification-認證-Certificación	      	

Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [LABLITY-20W](#)

LABITY - _____
Power Consumption


Power Consumption	
Code	Description
20W	20W@696mm
25W	25W@696mm
28W	28W@996mm
30W	30W@996mm
36W	36W@1296mm
40W	40W@1296mm
40W	40W@1596mm
45W	45W@1596mm
50W	50W@1596mm



BEAM ANGLE

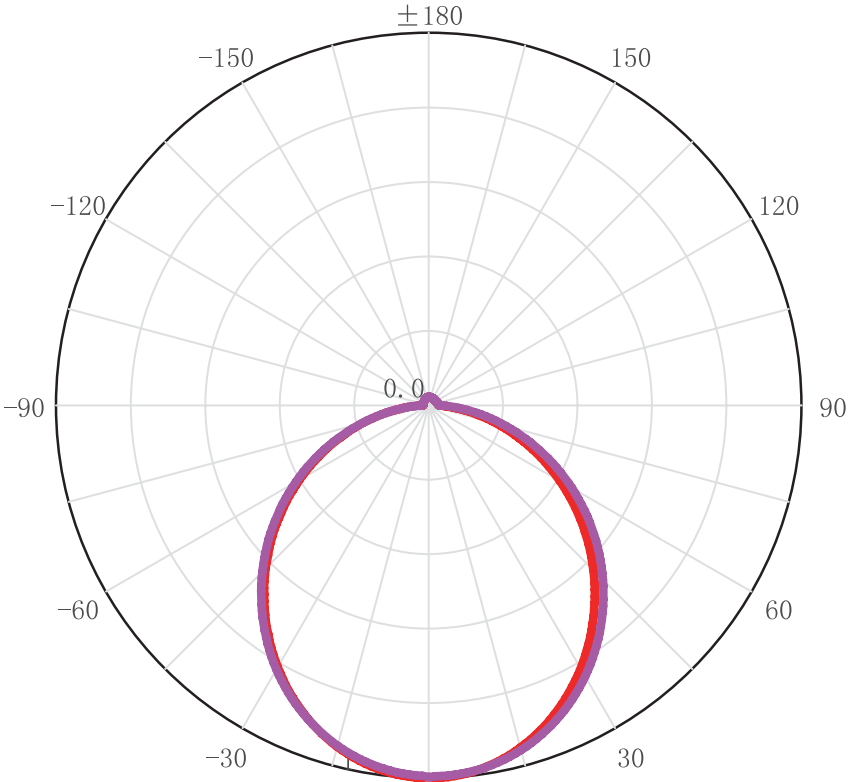

Technical Drawing



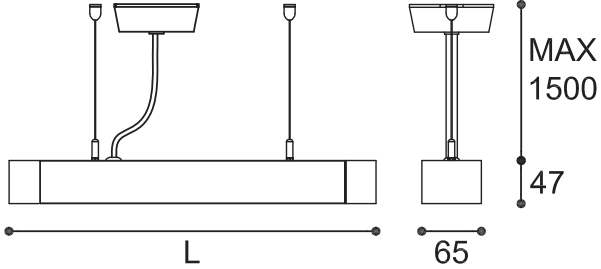


- L x W x H
- 696×65×47
 - 996×65×47
 - 1296×65×47
 - 1596×65×47


Unit: mm

ACCESSORIES


Surface Mounted
Code: PANCY-SM-01



Pendant Mounted
Code: PANCY-PM-01





Pendant Mounted
Code: PANCY-PM-02




INSTRUCTION

Model	300	600	900	1200	1500
L (mm)	260	455	755	1045	1345

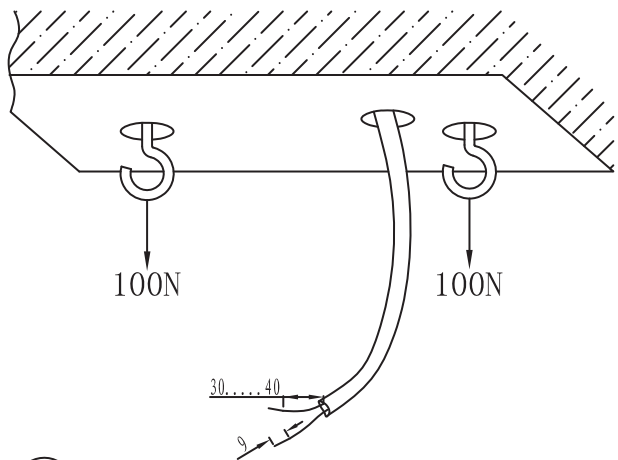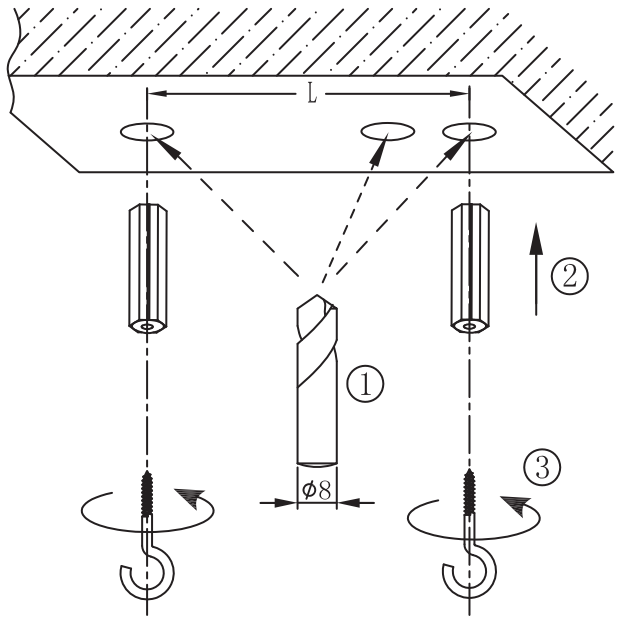


I

II

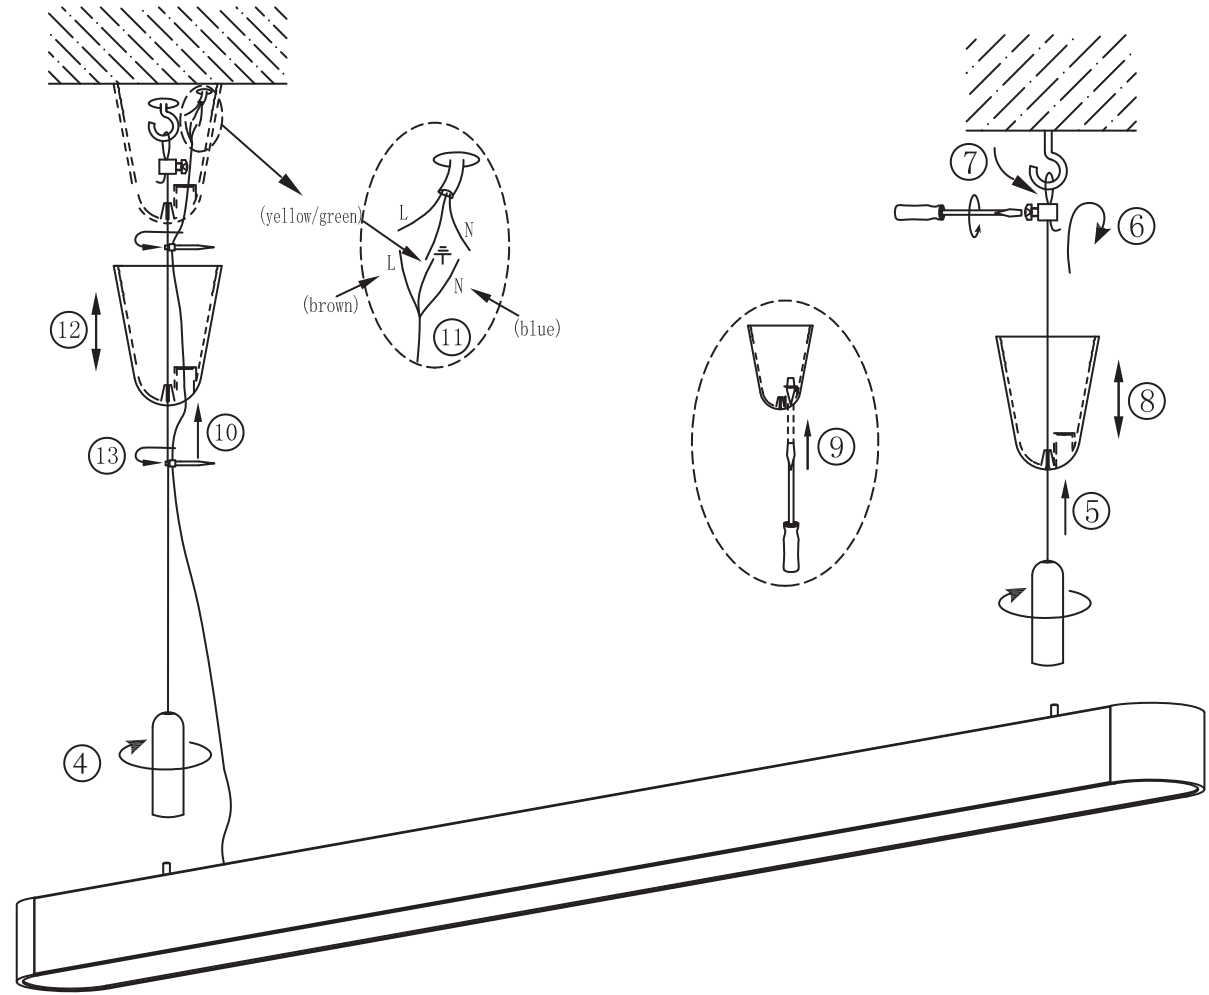

III

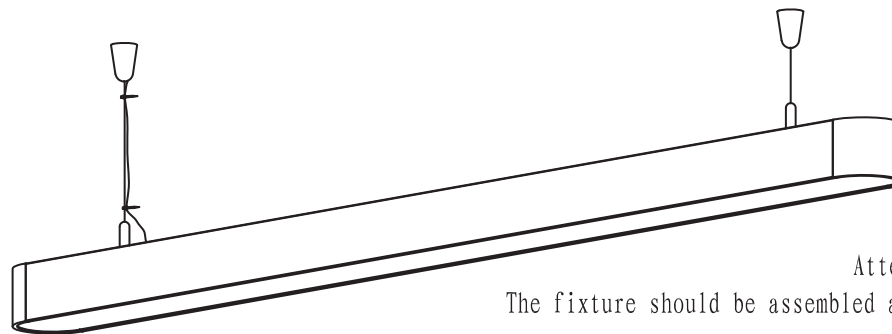

DIMON
TECHNOLOGY

Attention:
The fixture should be assembled and installed by professionals!