


LABITY Slim

W:42xH:65xL:---mm

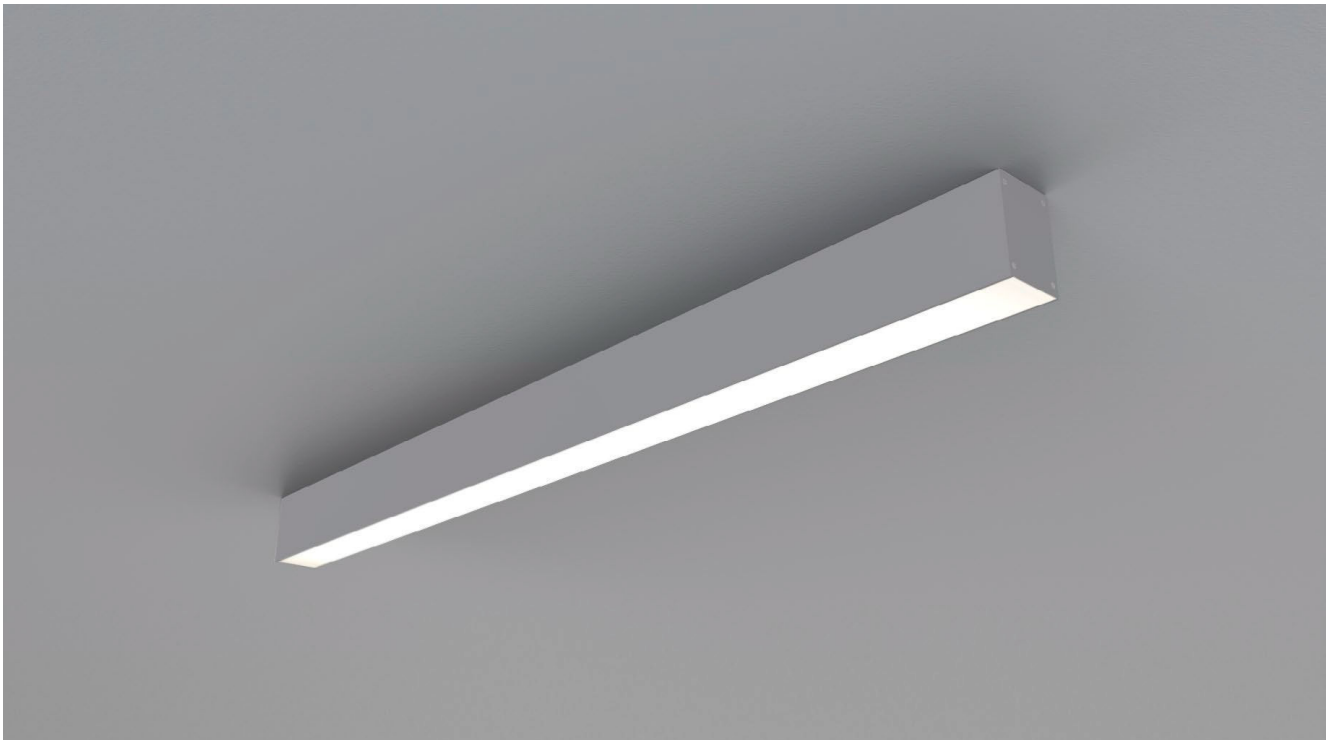

LED LINEAR CEILING LIGHT. Housing: high quality aluminium alloy, electrostatic thermo-painting, designed as heatsink. Anti-glare reflector and diffuser system made of PC. LED module: SMD LEDs, CRI>80, LM-80 performance approval >50,000 hours. Integrated-Type ELV, 0-10V, DALI, DMX and RDM LED constant current control gear. Deep recessed design achieves super eye comfort. The fixture can be available in different length and the light emission can be three sides.

LABITY Slim







W:42xH:65xL:---mm

DIMON
TECHNOLOGY


Technical Data

Luminaire Type-安裝方式Tipo de luminaria


Surface & Suspended Mounted明裝或吊裝 superficie y suspendido montado

Dimension-尺寸-Dimensión (L x W x H)	• 600x 42 x 64 mm • 1200x 42 x 64 mm	900x 42 x 64 mm 1500x 42 x 64 mm
Power Consumption Max-燈具功率 Consumo de energía Max	• 600mm : 12W 14W 18W • 900mm : 16W 20W 24W • 1200mm : 26W 28W 30W • 1500mm : 32W 36W 40W	
Input Voltage-輸入電壓-Voltaje de entrada	• 100-240 VAC 50/60HZ	
Power Factor / 功率因數/Factor de potencia	PF>0.95	
Total Harmonic Distortion/總諧波失/Distorsión armónica total	THD <20%	
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 1 -10V Dimming Driver AC100-240V 50/60HZ 3. Dali Dimming Driver AC100-240V 50/60HZ 4. Remoted Type Emergency Backup >2 hours or >3 hours @ < 12charger hours應急電池/Copia de seguridad de emergencia	
Control Protocol-控制協議 Protocolo de Control	1-10V or Dali	
Beam Angle光束角ángulo de haz	120°	
Light Source Brand-光源品牌-Fuente de luz de marca	OSRAM LED	
LED Life-LED壽命-La vida del LED	>60,000 hours	
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K	
Color Rendering Index-顯色指數 Índice de reproducción cromática	• > 82 • > 90	
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM	
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	• 100 Lm/w(2700K), 100 Lm/w(3000K), 110 Lm/w(4000K), • 120 Lm/w(5000K), 120 Lm/w(6500K),	
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	• 130 Lm/w(2700K), 130 Lm/w(3000K), 140 Lm/w(4000K), • 150 Lm/w(5000K), 150 Lm/w(6500K),	
Housing materials-外殼材料 Materiales de la carcasa	Aluminium Alloy and Opal Polycarbonate 鋁合金和乳白PC單 Aleación de aluminio y policarbonato o PMMA	
Housing Color外殼顏色 color de la carcasa	Matte white / Matte black / Matte silver 啞光白色 / 啞光黑色 / 啞光銀色 Blanco mate / Matte black / Astilla mate	
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C	
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación	
Ingress Protection-防護等級 Protección de ingreso	IP20	
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: LVD: IEC/EN 60598-1;EN / IEC/EN 60598-2-1;IEC62471;IEC/EN 62031; IEC/EN 62493 ; IEC/EN 62471 LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574;EN 55015 ; IEC /EN 62384	
Certification-認證-Certificación	     	

BEAM ANGLE

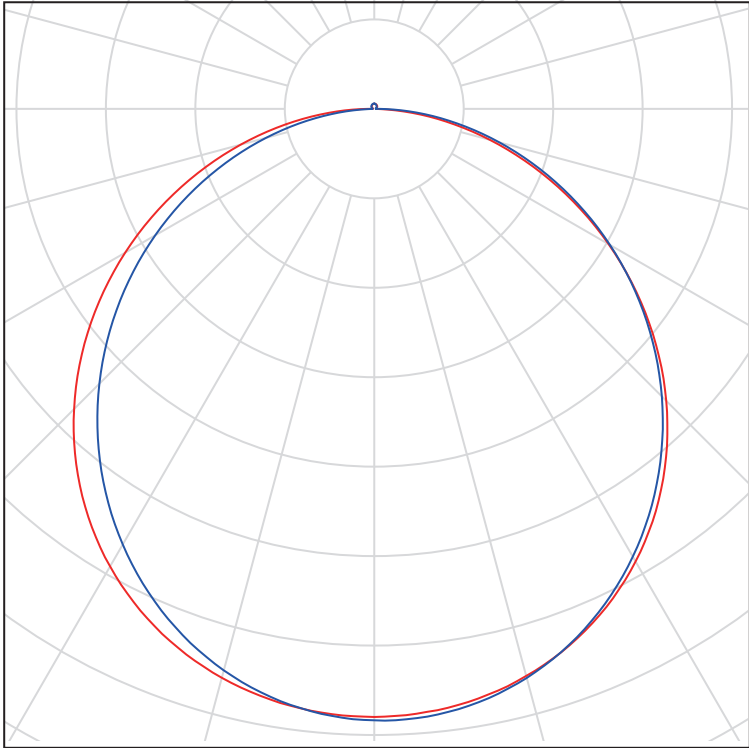

Technical Drawing



600 / 900 / 1200 / 1500



Unit: mm