









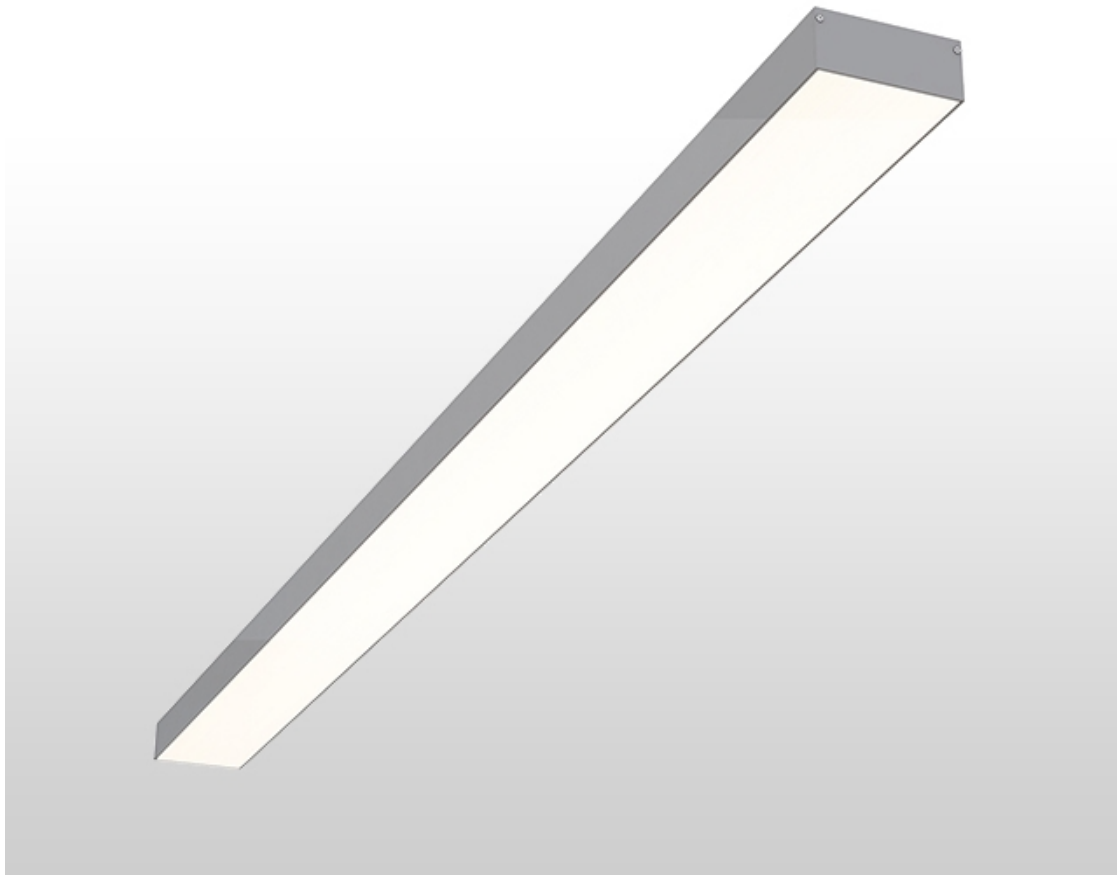

LABITY X

W:148xH:86mm IP20




- Pendant or Surface Mounted Type
- Housing: Extrusion Aluminum alloy with powder-coated
- Opal Polycarbonate Diffusor
- Integrated LED Driver
- Optioan Dimming Control: 1-10V, DALI, Emergency Battery


Technical Data

Luminaire Type-安裝方式/Tipo de luminaria	Pendant or Surface Mounted Type 吊裝或表面安裝型 Tipo colgante o montado en superficie
Dimension-尺寸-Dimensión	• 1140x148x86mm
Power Consumption Max-燈具功率 Consumo de energía Max	14W 20W 28W 34W 36W
Input Voltage-輸入電壓-Voltaje de entrada	220-240 VAC 50-60Hz,
Power Factor / 功率因數/Factor de potencia	PF>0.9 or PF:>0.95 Detail Refer to LED Driver data sheet
Total Harmonic Distortion/總諧波失/Distorsión armónica total	THD<20 Detail Refer to LED Driver data sheet
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED • ON/OFF Switch AC220-240V 50/60HZ • 1-10V Dimming Driver AC220-240V 50/60HZ • Dali Dimming 0-100% Driver AC220-240V 50/60HZ • DMX Driver AC220-240V 50/60HZ • Remote Emergency Kit Backup >2 hours or >3 hours @ < 12 charger hours 應急電池/Copia de seguridad de emergencia
Control Protocol-控制協議/Protocolo de Control	1-10V / Dali / DMX 512
Beam Angle光束角/ángulo de haz	110°
Light Source Brand-光源品牌-Fuente de luz de marca	OSRAM
"Lumen Maintenance LM-80 Reported by TM-21"@25 °C	L70(10k) > 60,500 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	• > 80 • >90
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy燈具效率 La eficacia de la luminaria	95 Lm/w(2700K), 95 Lm/w(3000K), 100 Lm/w(4000K), 105 Lm/w(5000K), 105 Lm/w(6500K),
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	125 Lm/w(2700K), 125 Lm/w(3000K), 130 Lm/w(4000K), 135 Lm/w(5000K), 135 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Aluminium Alloy and Opal Polycarbonate diffuser 鋁合金和乳白PC擴散板 Aleación de aluminio y difusor de PC Opal
Housing Color 外殼顏色 color de la carcasa	Matte white / Matte black / Matte silver 啞光白色 / 啞光黑色 / 啞光銀色 Blanco mate / Matte black / Astilla mate
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Ingress Protection-防護等級 Protección de ingreso	IP20
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK07
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: LVD: IEC/EN 60598-1;EN / IEC/EN 60598-2-1;IEC62471;IEC/EN 62031; IEC/EN 62493; IEC/EN 62471 EMC: EN55015 ; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574 ; RoHS LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574;EN 55015 ; IEC /EN 62384
Certification-認證-Certificación	        

BEAM ANGLE

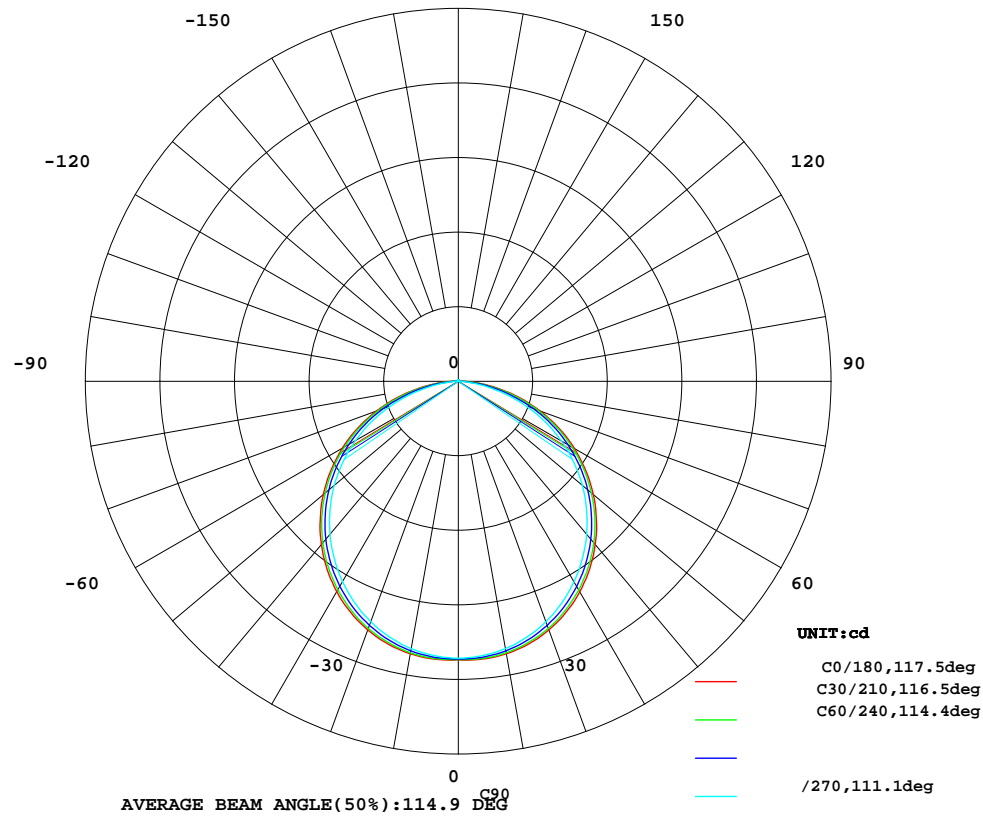

Technical Drawing

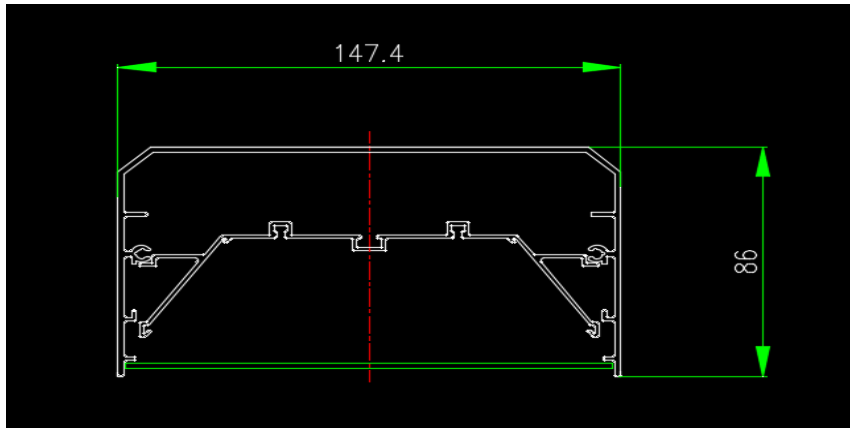

W: 148x H: 86 x L: 1140mm

Unit: mm