


LACHY PRO

IP65 6W-25W



LINEAR RECESSED DOWN LIGHT.

- Housing: aluminium, powder-coated and tempered clear Glass
- UV resistant and corrosion-resistance powder coating
- Anti-glare Lighting Distribution
- Ingress protection: IP65

Technical Data

Luminaire Type-安裝方式Tipo de luminaria

Recessed Mount Type嵌入式線條燈Empotrada Tipo Mount

Dimension-尺寸-Dimensión	• L: 185 x W: 80 x H: 87mm • L: 230 x W: 80 x H: 87mm • L: 260 x W: 80 x H: 87mm • L: 320 x W: 80 x H: 87mm		
Input Voltage-輸入電壓-Voltaje de entrada	AC200-240V 50/60HZ		
Power Consumption Max-燈具功率 Consumo de energía Max	• L: 185 x W: 80 x H: 87mm : 6W 8W 11W • L: 230 x W: 80 x H: 87mm : 12W 14W • L: 260 x W: 80 x H: 87mm : 16W 18W • L: 320 x W: 80 x H: 87mm : 20W 22W 24W		
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated -type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 0-10V Dimming Driver AC220-240V 50/60HZ 3. Dali Dimming Driver AC220-240V 50/60HZ 4. Remote-type DMX Driver AC220-240V 50/60HZ 5. Remote-typeRDM Driver AC220-240V 50/60HZ 6. Remote-type Emergency Backup >2 hours or >3 hours @ < 12 charger hours應急電池/Copia de seguridad de emergencia		
LED Driver Features驅動特性 Funciones del controlador de LED	• POWER FACTOR : PF>0.90 @ Full Load • TOTAL HARMONIC DISTORTION: THD< 20%		
Control Protocol-控制協議 Protocolo de Control	1-10V / Dali / DMX 512 / RDM / ZIGBEE Wireless Control		
Beam Angle光束角ángulo de haz	15° 24° 38° 50°		
Light Source Brand-光源品牌-Fuente de luz de marca	CREE		
"Lumen Maintenance LM-80 Reported by TM-21"	L70 > 54,000 hrs		
LED Life-LED壽命-La vida del LED	>100,000 hours		
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K		
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80		
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SDCM標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM		
Luminaire Efficacy燈具效率 La eficacia de la luminaria	70Lm/w(2700K), 70 Lm/w(3000K), 80 Lm/w(4000K), 90Lm/w(5000K), 90 Lm/w(6500K),		
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	130 Lm/w(2700K), 135 Lm/w(3000K), 145 Lm/w(4000K), 150 Lm/w(5000K), 150 Lm/w(6500K),		
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and Clear Tempered Glass 壓鑄鋁和透明鋼化玻璃 Aluminio fundido a presión y vidrio templado transparente		
Trim Color-框邊顏色-Estilo Color	Polyester powders CoatingMatte聚酯粉末塗料 Polvos de poliéster Revestimiento white / Matte black 啞光白色 / 啞光黑色 Blanco mate / Matte black		
Net Weight淨重Peso Neto	• L: 185 x W: 80 x H: 87mm : 1kg L: 230 x W: 80 x H: 87mm : 1.2kg • L: 260 x W: 80 x H: 87mm : 1.5kg L: 320 x W: 80 x H: 87mm : 2kg		
Ingress Protection-防護等級 Protección de ingreso	IP65		
Net Weight淨重Peso Neto	• L: 185 x W: 80 x H: 87mm : 1kg L: 230 x W: 80 x H: 87mm : 1.2kg • L: 260 x W: 80 x H: 87mm : 1.5kg L: 320 x W: 80 x H: 87mm : 2kg		
perating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación		
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C		
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC/EN 60598-1 ; IEC/EN 60598-2-2 ; IEC/ EN62493 ; IEC/EN 62301 ; IEC TR 62778 & IEC 62471 LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547		
Certification-認證-Certificación	       		

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.





Example product code: [LACHY-12W](#)

LACHY-PRO - -
[Power Consumption](#)

Power Consumption	
Code	Description
6W	6W@L: 185 x W: 80 x H: 87mm
8W	8W@L: 185 x W: 80 x H: 87mm
11W	11W@L: 185 x W: 80 x H: 87mm
12W	12W@ L: 230 x W: 80 x H: 87mm
14W	14W@ L: 230 x W: 80 x H: 87mm
16W	16W@L: 260 x W: 80 x H: 87mm
18W	18W@L: 260 x W: 80 x H: 87mm
20W	20W@ L: 320 x W: 80 x H: 87mm
22W	22W@ L: 320 x W: 80 x H: 87mm
24W	24W@ L: 320 x W: 80 x H: 87mm


BEAM ANGLE

DIMON
TECHNOLOGY

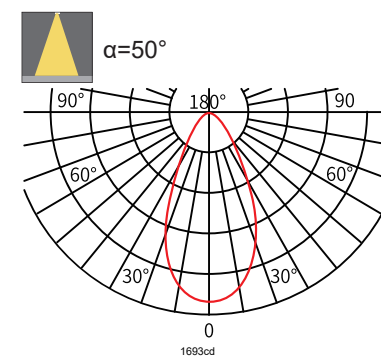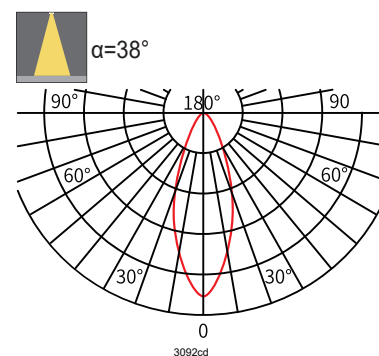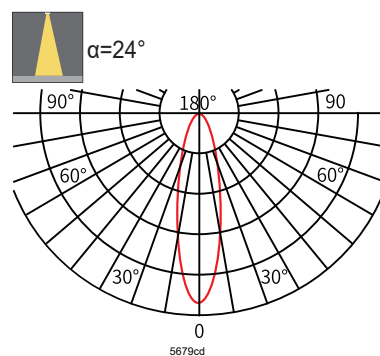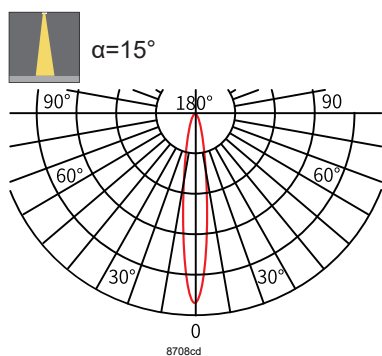


Technical Drawing


DIMON
TECHNOLOGY

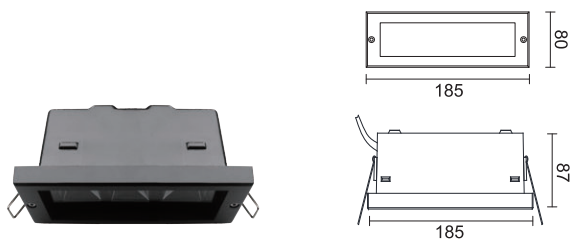


6W-11W

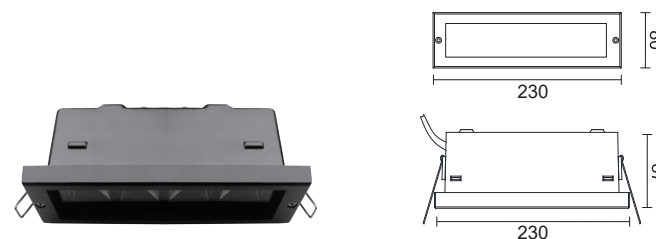

12W-15W

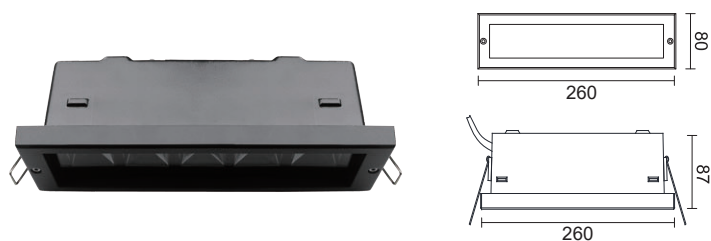

16W-20W

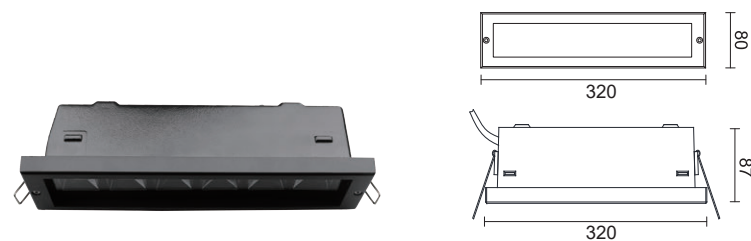

22W-25W