



## LAHAN-S

L 1200 x W 50 x H75 mm 40W



Optional  
Prismatic diffuser

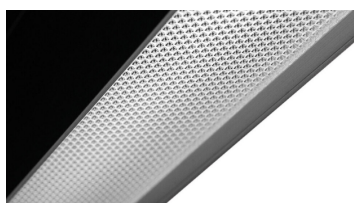

- Adopt high lumen SMD light source, flicker-free and high-efficiency driver make a better lumen.
- Aluminum housing provides excellent thermal management.
- Multiple installations: Pendant / Ceiling / Wall mounted
- High lumen efficiency, 100LM/W.
- Non-dim / DALI / 0/1-10V dim.
- With emergency type.

## Technical Data

Installation method / 安裝方式 / Metodo de instalacion

Pendant Mounted / Ceiling Mounted / Wall Mounted

吊掛式/吸頂式/壁掛式

Montado en suspensión / Montado en techo / Montado en pared

Dimension-尺寸-Dimensión

L: 605 x W:50 x H:75mm

L: 1200 x W:50 x H:75mm

Power Consumption Max-燈具功率

Consumo de energía Max

L:605mm: 10W 15W 20W

L:1200mm: 25W 30W 36W 40W

Input Voltage-輸入電壓-Voltaje de entrada

AC220-240V 50/60HZ

LED Driver Type

LED驅動款式

Tipo de controlador LED

Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格

Consulte la especificación de controlador de LED

1. ON/OFF Switch AC220-240V 50/60HZ

2. 0/1 -10V Dimming Driver AC220-240V 50/60HZ

3. DALI Dimming Driver AC220-240V 50/60H

4. TUYA Wireless Dimming Driver AC220-240V 50/60H

5. Remote Type Emergency Battery Kit with battery Back up 2 hours or 3hours

LED Driver Features驅動特性

Funciones del controlador de LED

POWER FACTOR : PF&gt;0.90

TOTAL HARMONIC DISTORTION: THD&lt; 20%

Control Protocol-控制協議

Protocolo de Control

0/1-10V / DALI / TUYA Wireless Control

Beam Angle/光束角/ángulo de haz

100°

Light Source Brand-光源品牌-Fuente de luz de marca

Lumileds

"Lumen Maintenance LM-80 Reported by TM-21"

L70 &gt; 54,000 hrs

LED Life-LED壽命-La vida del LED

&gt;100,000 hours

Color Temperature -色溫

Temperatura del color

2700K / 3000K / 4000K / 5000K / 6500K

Tunable White: 2700K-6500K

Color Rendering Index-顯色指數

Índice de reproducción cromática

&gt; 80

&gt; 90

MacAdam Ellipses Binning

麥克亞當橢圓分級

Mac Adam binning elipse

Standard Deviation Colour Matching &lt; 3 SDCM

標準偏差配色&lt; 3 SDCM

Coincidencia de color estándar Desviación &lt; 3 SDCM

Luminaire Efficacy 燈具效率

La eficacia de la luminaria

80 lm/w(2700K), 90 lm/w(3000K), 100 lm/w(4000K),  
100 lm/w(5000K), 100 lm/w(6500K), 100lm/w @TW (2700K-6500K)

LED Source Luminous Efficacy

LED光源光效

Fuente luminosa LED Eficacia

130 lm/w(2700K), 140 lm/w(3000K), 150 lm/w(4000K),  
150 lm/w(5000K), 150 lm/w(6500K) 150lm/w @TW (2700K-6500K)

Housing materials-外殼材料

Materiales de la carcasa

Die-cast aluminum and Opal Polycarbonate Diffuser or Prismatic Diffuser

壓鑄鋁和乳白擴散器或稜鏡漫射器

Fundición de aluminio y PC

Housing Color外殼顏色 color de la carcasa

Matte White 砂白色 Matte Black 砂黑色

Ingress Protection-防護等級 Protección de ingreso

IP20

Operating Temperature Range / 工作溫度範圍

Rango de temperatura de funcionamiento

-20 °C / +50 °C

Operating Humidity -工作濕度

Humedad de funcionamiento

0~90%, non-condensing-不結霜

sin condensación

Comply Testing Standard 符合測試標準

Cumplir el estándar de prueba

LED Luminaries: LVD: IEC/EN 60598-1;EN / IEC/EN 60598-2-1;IEC62471;IEC/EN 62031;  
IEC/EN 62493 ; IEC/EN 62471 (Risk Group 1)LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN  
61000-3-2;

IEC/EN 61000-3-3;IEC/EN61574;EN 55015 ; IEC /EN 62384

Certification-認證-Certificación



|         |          |      |
|---------|----------|------|
| Project | Fixture# | Date |
|         |          | Firm |

## Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [LAHAN-36W](#)


LAHAN - -  
Power Consumption


| Power Consumption |                 |
|-------------------|-----------------|
| Code              | Description     |
| 10W               | 10W @ L: 605mm  |
| 15W               | 15W @ L: 605mm  |
| 20W               | 20W @ L: 605mm  |
| 25W               | 25W @ L: 1200mm |
| 30W               | 30W @ L: 1200mm |
| 36W               | 36W @ L: 1200mm |
| 40W               | 40W @ L: 1200mm |

Accessories : Wireless app control TUYA



## BEAM ANGLE

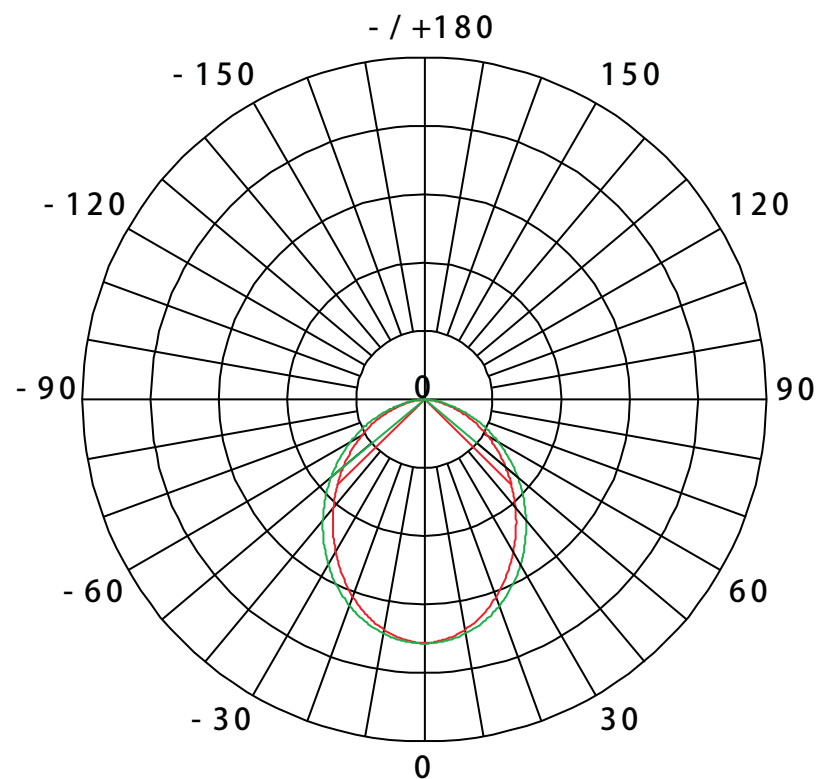

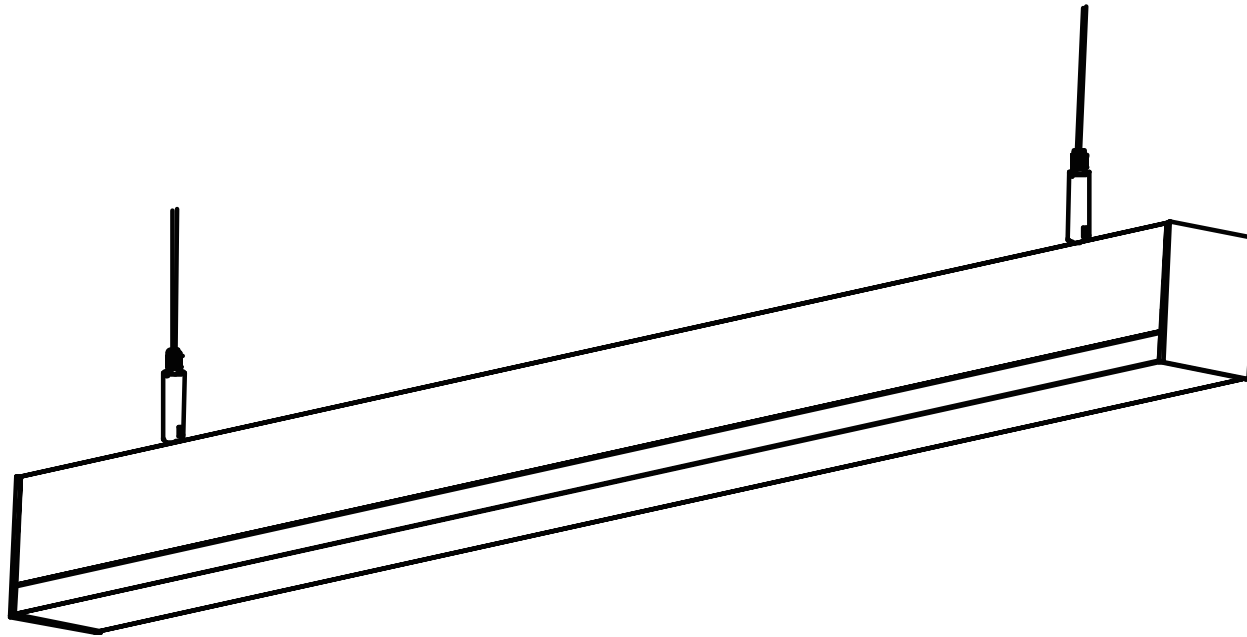

L605 x W50 x H75mm  
L1200 x W 50 x H75mm