

LASHA PRO

W:68xH:80mm IP54 45W Max




Pendant Mount Type LED LINEAR LIGHT. Housing: Extrusion aluminum, powder-coated, designed as heatsink. Anti-glare reflector and diffusor system made of PMMA. LED module: SMD LEDs, CRI>80, LM-80 performance approval >50,000 hours. Integrated-Type ELV, 0-10V, DALI, DMX and RDM LED constant current control gear. Deep recessed design achieves super eye comfort. The fixture can be available in different length.

LASHA PRO

W:68xH:80mm IP54 45W Max

DIMON
TECHNOLOGY

Technical Data

Luminaire Type-安裝方式Tipo de luminaria	Pendant Mount Type&吊裝燈具
Dimension-尺寸-Dimensión	L: 1149 x W: 68 x H: 80 mm
Power Consumption Max-燈具功率 Consumo de energía Max	• 14W 20W 28W 36W 40W 45W
Input Voltage-輸入電壓-Voltaje de entrada	100-240 VAC / 100-277VAC 50-60Hz,
Power Factor / 功率因數/Factor de potencia	PF>0.95
Total Harmonic Distortion/總諧波失/Distorsión armónica total	THD <20%
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED • ON/OFF Switch AC220-240V 50/60HZ • 1 -10V Dimming Driver AC100-240V 50/60HZ • Dali Dimming Driver AC100-240V 50/60HZ • DMX Driver AC100-240V 50/60HZ • Remote Emergency Kit Backup >2 hours or >3 hours @ < 12 charger hours應急電池/Copia de seguridad de emergencia
Control Protocol-控制協議Protocolo de Control	1-10V / Dali / DMX 512
Beam Angle光束角ángulo de haz	110°
Light Source Brand-光源品牌-Fuente de luz de marca	ZHAGA - (Photobiological safety-IEC 62471 'Risk Group 1' (low risk))
"Lumen Maintenance LM-80 Reported by TM-21"	• L70(10k) > 60,500 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy燈具效率 La eficacia de la luminaria	95 Lm/w(2700K),95 Lm/w(3000K),100 Lm/w(4000K), 105 Lm/w(5000K), 105 Lm/w(6500K),
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	125 Lm/w(2700K),125 Lm/w(3000K),130 Lm/w(4000K), 135 Lm/w(5000K), 135 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Aluminium Alloy and PMMA Opal diffuser 鋁合金和亞克力擴散板 Aleación de aluminio y difusor de PMMA Opal
Housing Color 外殼顏色 color de la carcasa	Matte white / Matte black / Matte silver 啞光白色 / 啞光黑色 / 啞光銀色 Blanco mate / Matte black / Astilla mate
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Ingress Protection-防護等級 Protección de ingreso	IP54
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: LVD: IEC/EN 60598-1;EN / IEC/EN 60598-2-1;IEC62471;IEC/EN 62031; IEC/EN 62493 ; IEC/EN 62471 EMC: EN55015 ; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574 ; RoHS LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574;EN 55015 ; IEC /EN 62384
Certification-認證-Certificación	

Project	Fixture#	Date
		Firm



Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [LASHA-28W](#)


LASHA-PRO - - _____
Power Consumption

Power Consumption	
Code	Description
14W	14W
20W	20W
28W	28W
36W	36W
40W	40W
45W	45W

BEAM ANGLE

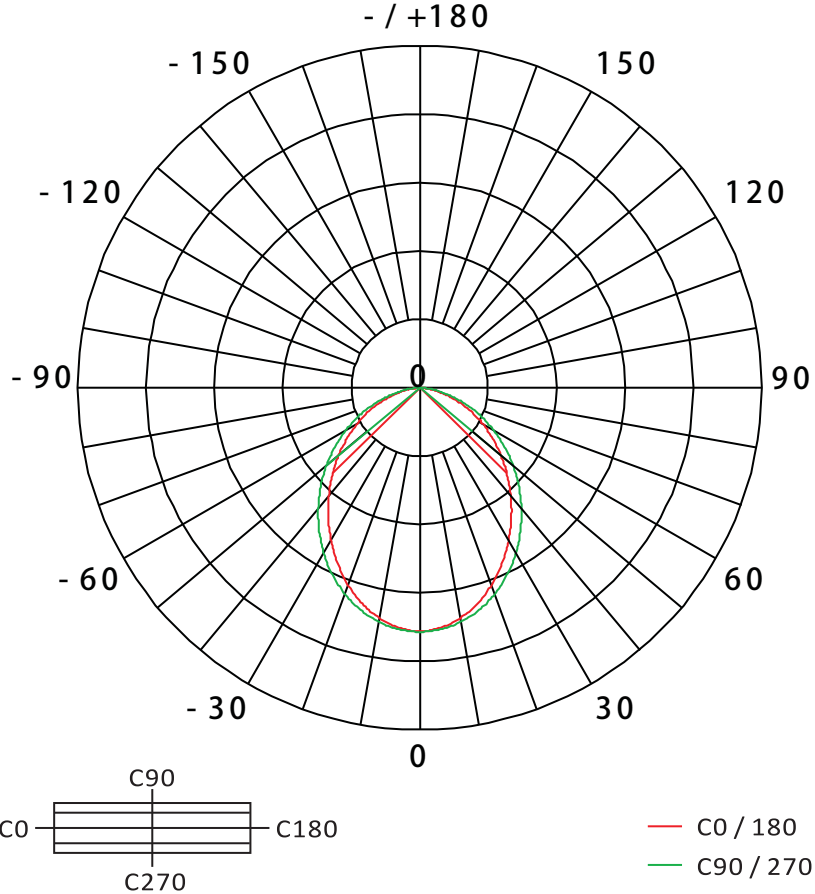

Pendant Mounted

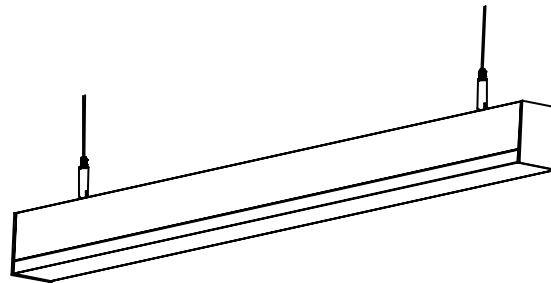

1149*68*80mm(L*W*H)

Unit: mm