


PACIFIC

6W to 36W IP65

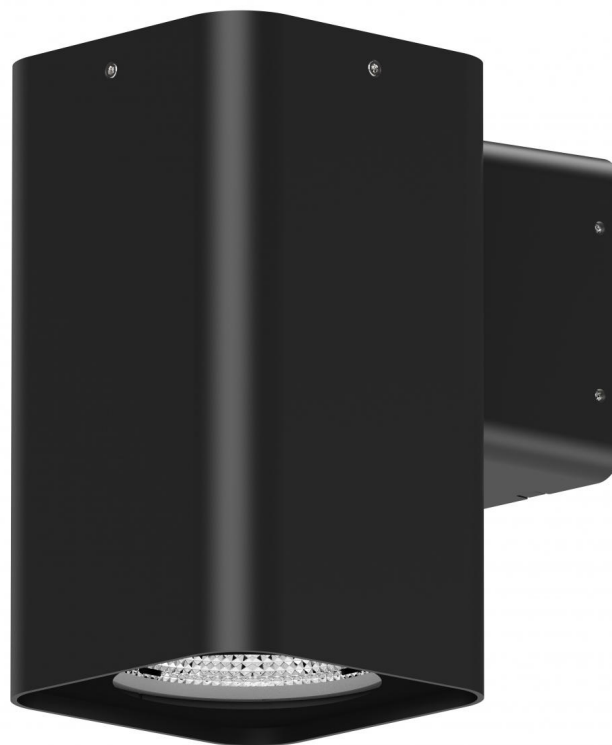

LED OUTDOOR WALL MOUNTED UP AND DOWN LIGHT.

Housing: die-cast aluminium, powder-coated, designed as heat sink.

Anti-glare reflector and diffusor system made of tempered glass.

Ingress protection: IP65.

Technical Data

Installation method / 安裝方式 / Metodo de instalacion	Wall Mounted Type - 壁掛式燈具 - Tipo montado en la pared
Dimension-尺寸-Dimensión	Up or Down Light: 86 x 86 x H: 150 (D:136)mm or 105 x 105 x H: 170x (D:165)mm Up and Down Light: 86 x 86 x H: 200 x(D:136)mm or 105 x 105 x H: 220 x (D:165)mm
Input Voltage-輸入電壓-Voltaje de entrada	AC 220-240V 50/60HZ
Power Consumption Max-燈具功率 Consumo de energía Max	Up or Down Light: 86 x 86 x H: 150 (D:136)mm : 6W 8W 10W 12W 105 x 105 x H: 170x (D:165)mm : 15 W 18W 20W Up and Down Light: 86 x 86 x H: 200 x (D:136)mm : 12W (2x6W) 16W (2x8W) 105 x 105 x H: 220 x (D:165)mm : 24W(2x12W) 30W (2x15W)
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 0/1 -10V Dimming Driver AC220-240V 50/60HZ 3. DALI Dimming Driver AC220-240V 50/60HZ
LED Driver Features驅動特性 Funciones del controlador de LED	POWER FACTOR : PF>0.90 TOTAL HARMONIC DISTORTION: THD< 20%
Control Protocol-控制協議 Protocolo de Control	0/1-10V / DALI
Beam Angle光束角ángulo de haz	12° 24° 36° 45° 60°
Light Source Brand-光源品牌-Fuente de luz de marca	CREE COB
"Lumen Maintenance LM-80 Reported by TM-21"	L70 > 54,000 hrs
LED Life-LED壽命-La vida del LED	>100,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K/ 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	>90
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy燈具效率 La eficacia de la luminaria	85 Lm/w(2700K) 90 Lm/w(3000K) 100Lm/w(4000K) 110Lm/w(6500K)
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	130 Lm/w(2700K), 140 Lm/w(3000K), 150 Lm/w(4000K), 150 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and tempered glass壓鑄鋁和鋼化玻璃 Fundición de aluminio y vidrio templado
Housing Color外殼顏色 color de la carcasa	Powder Coating :Black RAL9005 / White RAL9003 / Silver Grey RAL9006 粉末塗料: 黑色,RAL9005/ 白色RAL9003 / 銀色RAL9006 Recubrimiento en Polvo: Negro
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-20 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~100%, non-condensing-不結霜 sin condensación
Ingress Protection-防護等級 Protección de ingreso	IP65
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK08
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: EN 60598-1;EN 60598-2-1; IEC TR62778 IEC62471 ; IEC 62031; RoHS LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574;EN 55015
Certification-認證-Certificación	      

Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [PACIFIC-18W](#)

PACIFIC - -

[Power Consumption](#)

Power Consumption	
Code	Description
6W	1x6W @ 86 x 86 x H: 150 (D:136)mm Up or Down Light
8W	1x8W @ 86 x 86 x H: 150 (D:136)mm Up or Down Light
10W	1x10W @ 86 x 86 x H: 150 (D:136)mm Up or Down Light
12W	1x12W @ 86 x 86 x H: 150 (D:136)mm Up or Down Light
15W	1x15W @ 105 x 105 x H: 170 (D:165)mm Up or Down Light
18W	1x18W @ 105 x 105 x H: 170 (D:165)mm Up or Down Light
20W	1x20W @ 105 x 105 x H: 170 (D:165)mm Up or Down Light
12W	12W (2x6W)@86 x 86 x H: 200 x (D:136)mm Up and Down Light
16W	16W (2x8W)@86 x 86 x H: 200 x (D:136)mm Up and Down Light
24W	24W (2x12W)@105 x 105 x H: 220 x (D:165)mm Up and Down Light
30W	30W (2x15W)@105 x 105 x H: 220 x (D:165)mm Up and Down Light

ACCESSORIES




Honey comb




BEAM ANGLE


12°

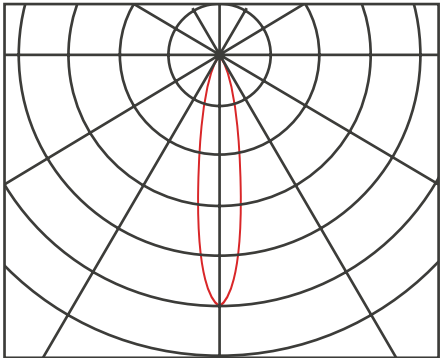


24°

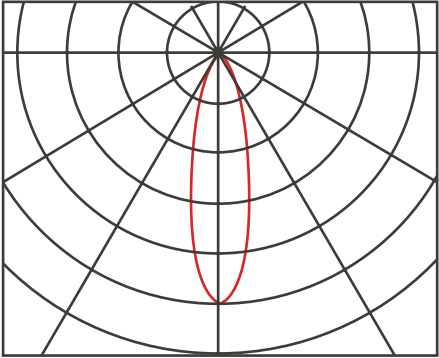


36°

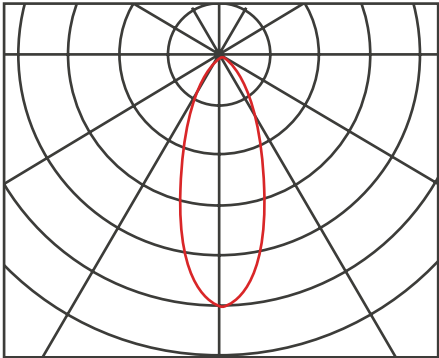

45°


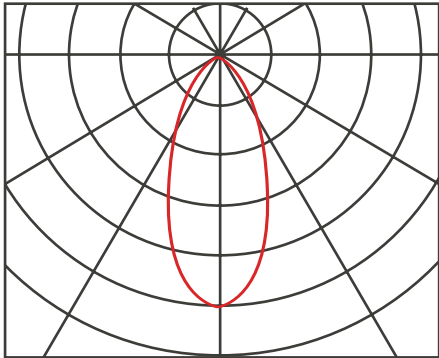


60°

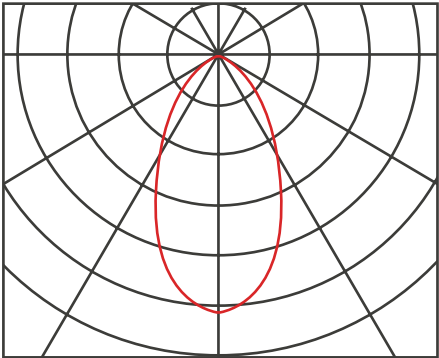

Technical Drawing (Up or Down Light)



DIMON
TECHNOLOGY

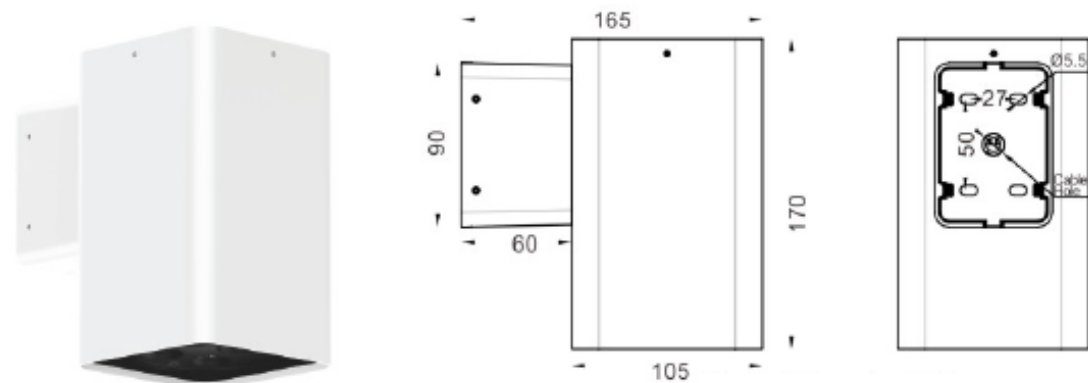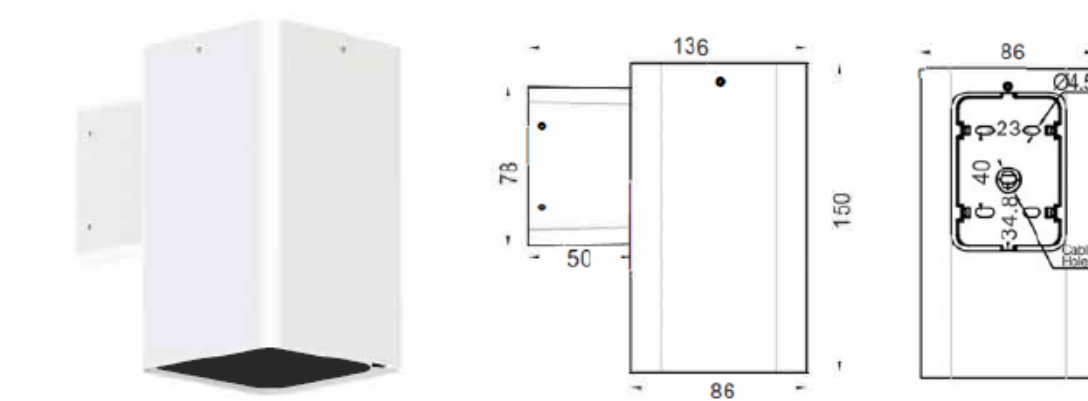

Unit: mm

Technical Drawing (Up and Down Light)

DIMON
TECHNOLOGY

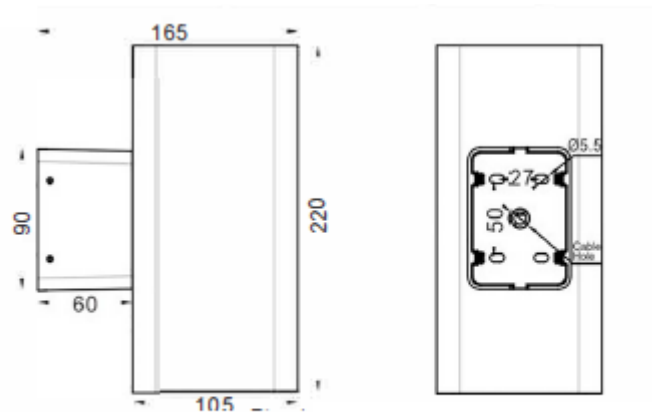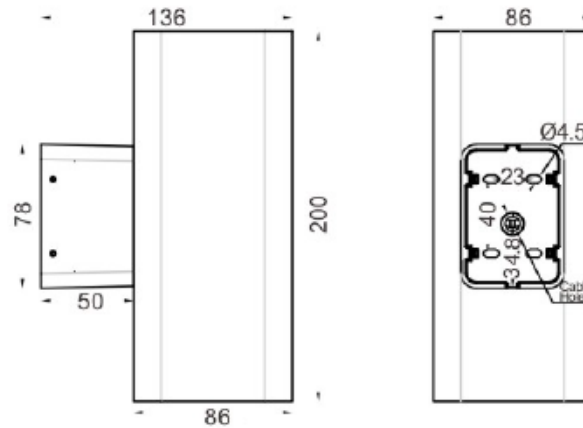

Unit: mm