


PICNI

Spike Reed Light dia 30mm



- Spike Mounted
- Protection grade IP67
- UV resistance level Class

Technical Data

Color -顏色-Color	<ul style="list-style-type: none"> • RED 620-630nm • BLUE 450-460nm • YELLOW 590-595nm • White : 2700K, 3000K , 4000K, 5000K
Power Consumption Max 燈具最大功率 Consumo de energía Max	0.5W
Input Voltage / 輸入電壓 Voltaje de entrada	DC24V
Beam Angle/光東角 ángulo de haz	360°
LED Life/LED壽命 La vida del LED	>50,000 hours
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	15LM/W @ RED 620-630nm 8LM/W @BLUE 450-460nm 15LM/W @YELLOW 590-595nm 60LM/W @White : 2700K, 3000K , 4000K, 5000K 20LM/W @ RGB --Color Change
Housing materials/外殼材料 Materiales de la carcasa	Aluminum Stand and PMMA 鋁製支架和PMMA
Ingress Protection/ 防護等級 Protección de ingreso	IP67
Dimension/尺寸 Dimensión	Dia: 30mm x H: 600mm 800mm 1000mm Cable : 2000mm
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-20 °C / + 50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Certification-認證-Certificación-شهادة	    

Project	Fixture#	Date
		Firm




Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [PINCI-0.5W](#)

PICNI - 0.5W
Power Consumption

Power Consumption	
Code	Description
0.5W	0.5W

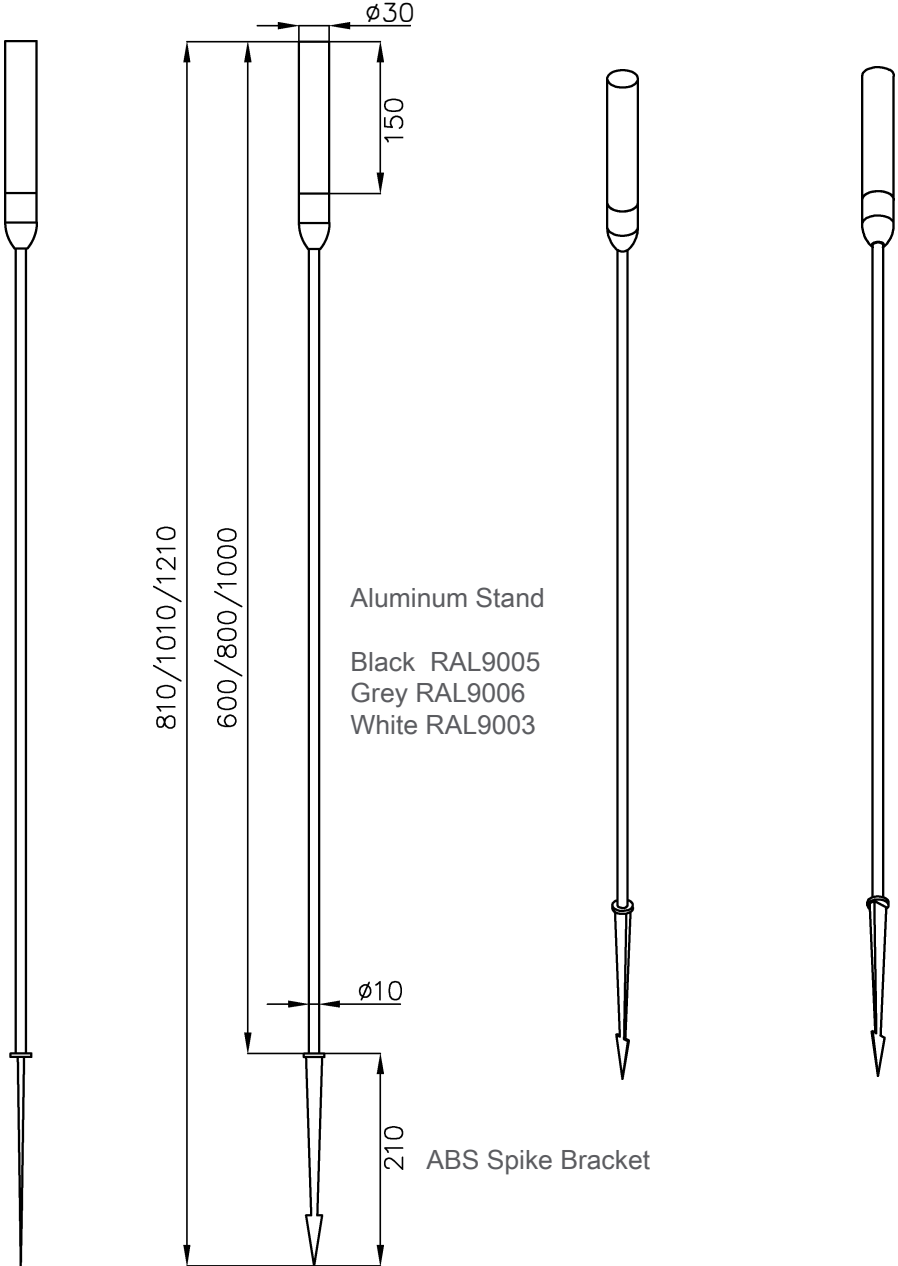

Unit: mm