


PONEE -T

LED T5 Steel Panel & PC diffuser





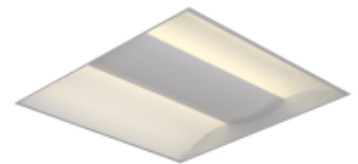




Accessories : Air-Slot



- Recessed Mount
- Adopted high-quality Steel with Electrostatic Thermo Painting and High Temperature Baking technology.
- Anti UV Polycarbonate Diffuser anti-glare lighting distribution UGR<19
- Integrated LED control Gear : ON/OFF 1-10V or Dali LED Driver
- Optional :air-slot

Technical Data

Luminaire Type- 安裝方式 Tipo de luminaria	Recessed Mount 暗裝式燈具 Montaje empotrado														
Dimension-尺寸-Dimensión	Refer to Technical Drawing 參考技術圖紙 Consulte el dibujo técnico.														
Input Voltage-輸入電壓-Voltaje de entrada	AC 220 -240V 50/60HZ														
Power Consumption Max-燈具功率 Consumo de energía Max	<table border="1"> <thead> <tr> <th>Qty of LED T5</th> <th>Dimension L x W x H (mm)</th> </tr> </thead> <tbody> <tr> <td>1x 6-10W 2feet LED T5</td> <td>598 x 598 x 115</td> </tr> <tr> <td>2x 6-10W 2feet LED T5</td> <td>598 x 598 x 115</td> </tr> <tr> <td>3x 6-10W 2feet LED T5</td> <td>598 x 598 x115</td> </tr> <tr> <td>1 x 12-20W 4feet LED T5</td> <td>1198 x 598 x115</td> </tr> <tr> <td>2 x 12-20W 4feet LED T5</td> <td>1198 x 598 x115</td> </tr> <tr> <td>3 x 12-20W 4feet LED T5</td> <td>1198 x 598 x115</td> </tr> </tbody> </table>	Qty of LED T5	Dimension L x W x H (mm)	1x 6-10W 2feet LED T5	598 x 598 x 115	2x 6-10W 2feet LED T5	598 x 598 x 115	3x 6-10W 2feet LED T5	598 x 598 x115	1 x 12-20W 4feet LED T5	1198 x 598 x115	2 x 12-20W 4feet LED T5	1198 x 598 x115	3 x 12-20W 4feet LED T5	1198 x 598 x115
Qty of LED T5	Dimension L x W x H (mm)														
1x 6-10W 2feet LED T5	598 x 598 x 115														
2x 6-10W 2feet LED T5	598 x 598 x 115														
3x 6-10W 2feet LED T5	598 x 598 x115														
1 x 12-20W 4feet LED T5	1198 x 598 x115														
2 x 12-20W 4feet LED T5	1198 x 598 x115														
3 x 12-20W 4feet LED T5	1198 x 598 x115														
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver for DC LED T5 / T8 Application--Refer to LED driver specification 請參閱LED驅動器規格Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 1-10V Dimming Driver AC220-240V 50/60HZ for DC LED Tube 3. DALI Dimming Driver AC220-240V 50/60HZ for DC LED Tube 4. DMX Driver AC220-240V 50/60HZ for DC LED Tube 5. ZIGBEE Wireless Control (Remoted Driver) AC220-240V 50/60HZ for DC LED Tube 6. Emergency Backup >2 hours or >3 hours @ < 12 charger hours 應急電池/Copia de seguridad de emergencia 7. Microwave Sensor ON/OFF														
Control Protocol-控制協議 Protocolo de Control	1-10V / DALI / DMX 512 / RDM / ZIGBEE Wireless Control														
Beam Angle 光束角 ángulo de haz	Refer to LED T5 / T8 tube data sheet														
Photobiological safety-IEC 62471 / of Luminaire 光生物安全檢驗(ICE/EN 62471) 結果: Seguridad fotobiológica-IEC 62471	<ul style="list-style-type: none"> • Low Risk Group 1 (RG1) Refer to LED T5 / T8 Specification • 低風險組1 (RG1) 參閱LED T5 / T8規格 • Grupo de bajo riesgo 1 (RG1) Consulte la especificación LED T5 / T8 														
Housing materials-外殼材料 Materiales de la carcasa	Steel Frame and Opal Polycarbonate Diffuser 鋼製框架和乳白PC擴散器 Estructura de Acero y Difusor de Policarbonato Opal														
Trim Housing Color 框外殼顏色 color de la carcasa	Electrostatic Thermo Painting : Matte white RAL 9003 靜電熱噴塗: 啞光白 RAL 9003 Termo Pintura Electroestática : Blanco mate RAL 9003														
Accessories 配件 accesorios	2-side-Air-slot 2側通風氣槽 Ranura de aire de 2 lados														
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C														
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación														
Ingress Protection-防護等級 Protección de ingreso	IP20														
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC/ EN 60598-1 / EN 60598-2-1 / EN 62031 / EN 62493 / IEC/EN 62471 / IEC 60598-2-22 / IEC 62031 / EN 55015 / EN 61000-3-2 / EN 61000-3-3 / EN 61547 / IEC 62262 / IEC 60529 / IEC TR62778 Luminaires Performance : IEC 62722-1 / IEC 62722-2-1 FSD regulation PPA 104A (4th Rev). RoHS														
Certification-認證-Certificación	      														

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [PONEER-36W](#)

PONEE - _____
POWER





POWER	
Code	Description
9W	1 pcs x 2feet 9W LED T5 @598 x 598mm
18W	2 pcs x 2feet 9W LED T5 @598 x 598mm
27W	3 pcs x 2feet 9W LED T5 @598 x 598mm
18W	1pcs x 18W 4feet LED T5 @1198 x 598 mm
36W	2pcs x 18W 4feet LED T5 @1198 x 598 mm
54W	3pcs x 18W 4feet LED T5 @1198 x 598 mm

BEAM ANGLE

110°

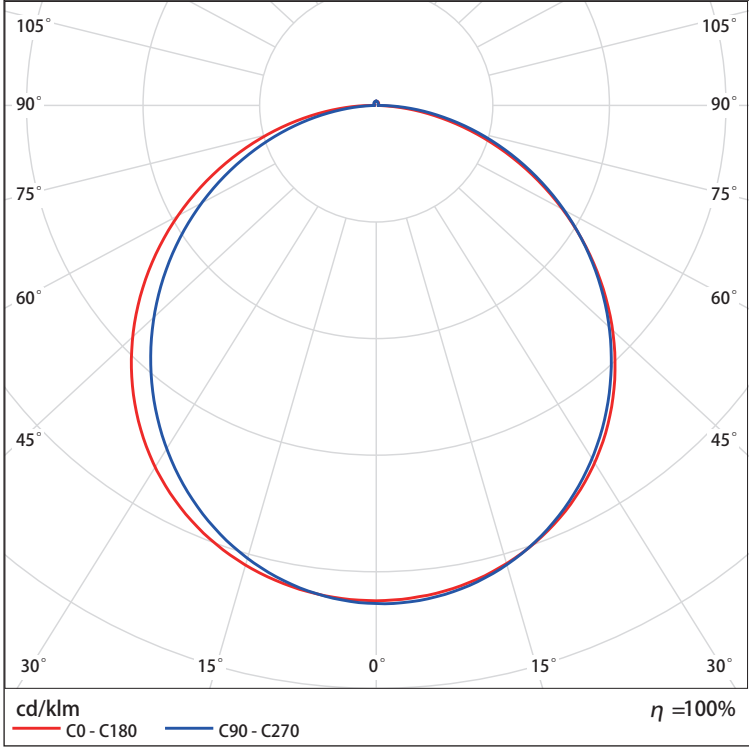

Technical Drawing

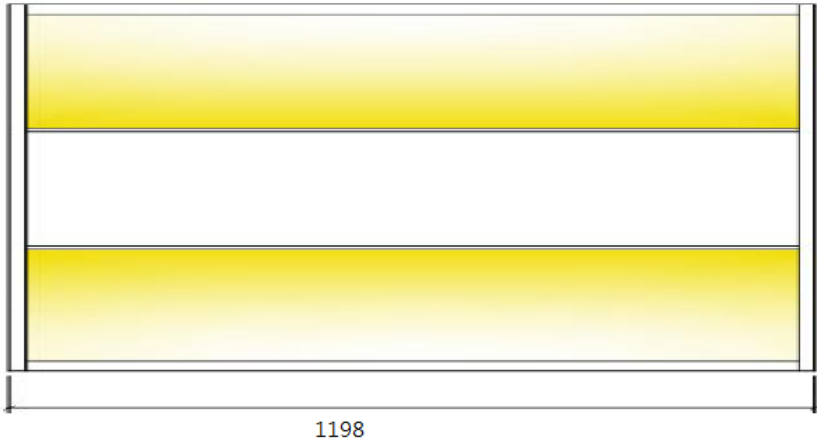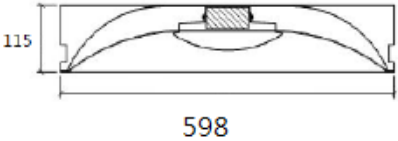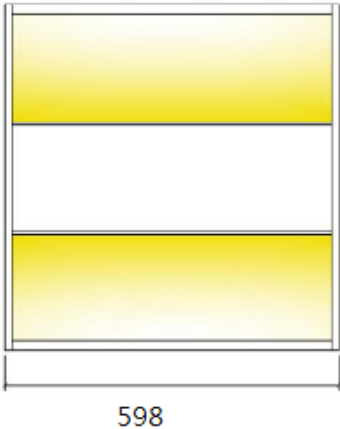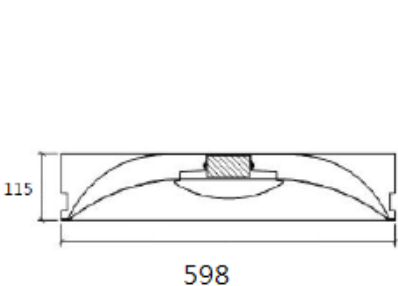

Technical Drawing 2-side-Air-slot

