


SPANTY

D100 x L87 mm 6W MAX IP65



ZigBee®



LED SPOT LIGHT. Housing: die-cast aluminium, outdoor UV resistant powder coat finish and 304# stainless steel cover and tempered glass. LED module: high-power CREE LEDs Array, CRI>80, LM-80 performance approval >50,000 hours. Ingress protection: IP65. Surface Mounted and Spike Mounted Type are available.

Technical Data

Luminaire Type/ 安裝方式 Tipo de luminaria	Surface Mounted and Spike Mounted Type 明裝式或插地式安裝 Tipo montado en superficie y montado en espiga
Dimension-尺寸-Dimensión	• DIA: 100 x L: 87 x H: 150 mm @ Surface Mounted • DIA: 100 x L: 87 x H: 298 mm @ Spike Mounted Type
QTY of LEDs-燈珠數量-CANT de LEDs	• 1 pcs CREE LED Array • 3 pcs CREE LED
Input Voltage-輸入電壓-Voltaje de entrada	• AC220V - 240V 50/60Hz (Integrated-type LED Driver / 內置LED驅動 / Controlador de LED de tipo integrado) • DC24V
Power Consumption Max-燈具功率 Consumo de energía Max	6W
Control Protocol-控制協議 Protocolo de Control	1-10V / Dali / DMX 512 / RDM / ZIGBEE Wireless Control
Beam Angle 光束角 ángulo de haz	• 10° @ 3 PCS LED • 25° @ 1 PCS LED @ 3 PCS LED • 40° @ 1 PCS LED @ 3 PCS LED • 60° @ 1 PCS LED @ 3 PCS LED
Light Source Brand-光源品牌-Fuente de luz de marca	CREE - (Photobiological safety-IEC 62471 'Risk Group 1' (low risk))
"Lumen Maintenance LM-80 Reported by TM-21"	1. L90(10k) = 50,700 hrs 2. L80(10k) > 63,500 hrs 3. L70(10k) > 63,500 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	• 80 Lm/w(2700K), • 80 Lm/w(3000K), • 85 Lm/w(4000K), • 90 Lm/w(5000K), • 90 Lm/w(6500K),
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	• 100 Lm/w(2700K), • 100 Lm/w(3000K), • 105 Lm/w(4000K), • 120 Lm/w(5000K), • 120 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and tempered glass & #316 Stainless Steel Cover & ABS Spike 壓鑄鋁和鋼化玻璃 & #316不銹鋼面蓋 & ABS Spike Fundición de aluminio y vidrio templado & # 316 de la cubierta de acero inoxidable & ABS Spike
Housing Color 外殼顏色 color de la carcasa	Powder Coating :Matte Silvery & #316 Stainless Steel Cover 粉末塗料：啞光銀灰色燈身 & #316不銹鋼面蓋 Recubrimiento en Polvo: Plateado mate & # 316 de la cubierta de acero inoxidable
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Ingress Protection-防護等級 Protección de ingreso	IP65 - (IEC 60529)
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC 60598-1 / IEC 60598-2-2 / Photometric data-IES format LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547
Certification-認證-Certificación	     

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [SPANTY-6W](#)

SPANTY - 6W
[Power Consumption](#)


Power Consumption	
Code	Description
6W	6W @ 1PCS LED @ 3 PCS LED

BEAM ANGLE


10°

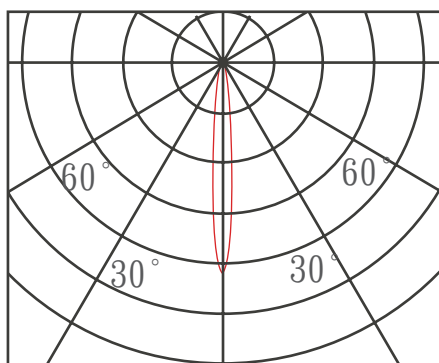


25°

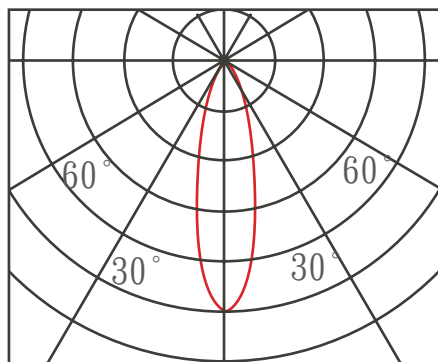


40°

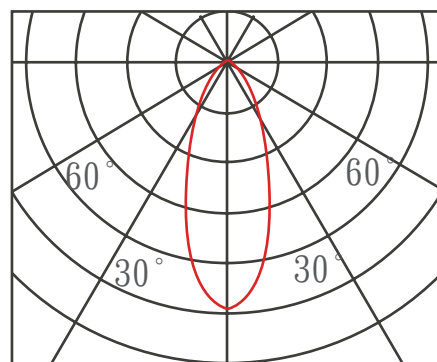

60°

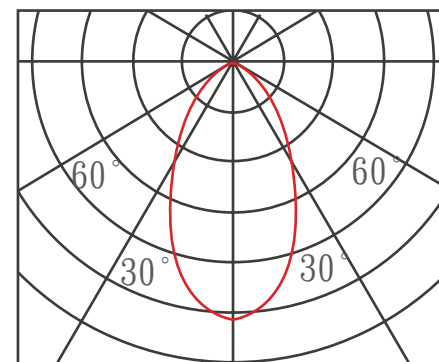

Technical Drawing

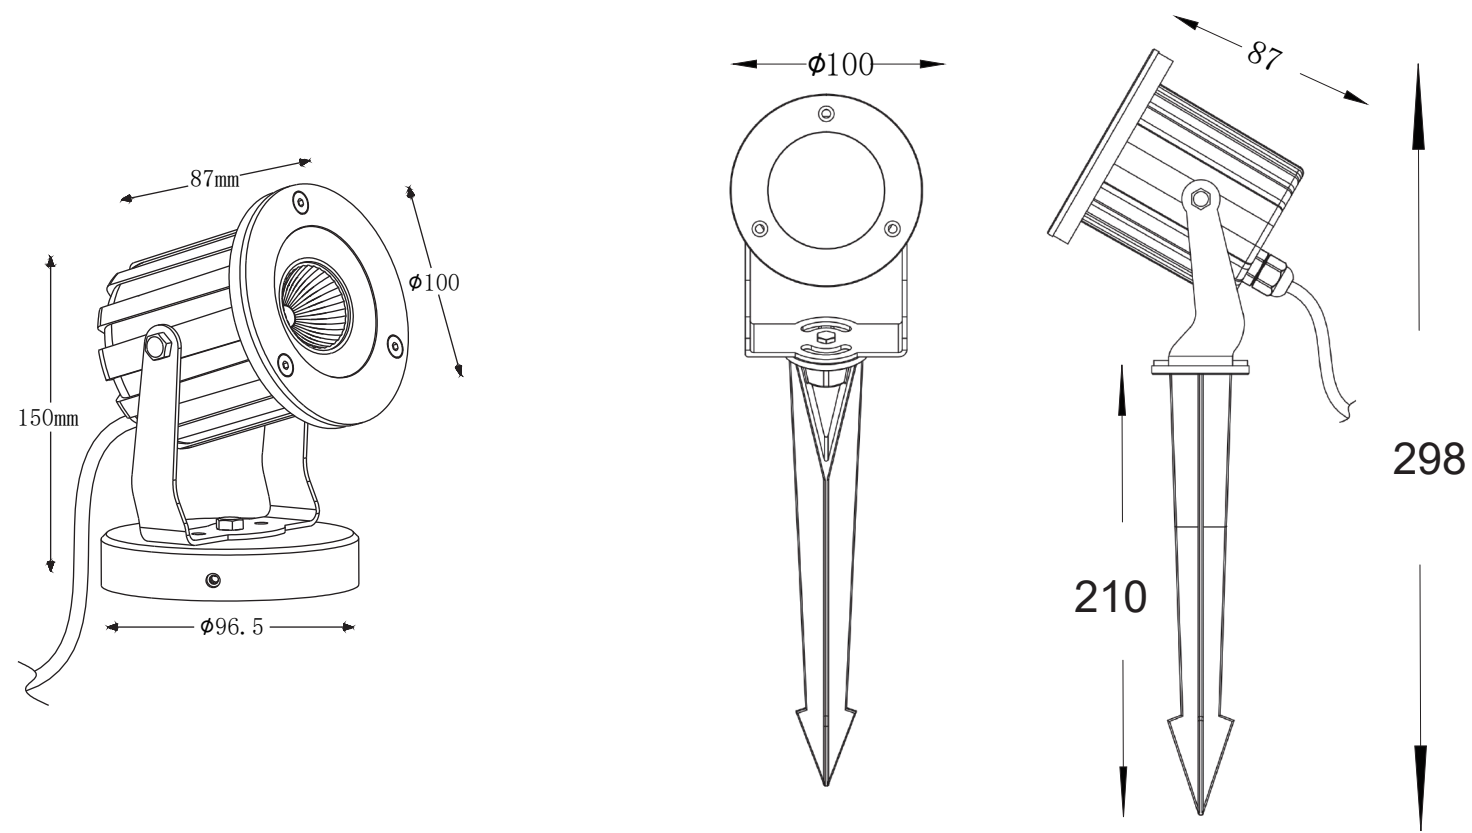

Unit: mm