


TECO

D113xL167mm 40W Max



- TECO track light Feature:
- Housing: die-cast aluminium with Anti-glare reflector and diffusor system made of Polycarbonate
- Wide Flood Light Distribution
- Rotated Through 350° and Tilted up to 90°.
- DALI / 0-10V / Triac dimmable

Technical Data

Luminaire Type-安裝方式Tipo de luminaria

Track Mounted Type 軌道燈具 Tipo de huella Montado

Dimension-尺寸-Dimensión	DIA 113 x H: 167 mm
QTY of LEDs-燈珠數量-CANT de LEDs	1 pcs CREE LED Array
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ
Power Consumption Max-燈具功率 Consumo de energía Max	• 24W 33W 36W 40W
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Constant Current LED Driver: Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ @ Integrated-type 2. ELV Dimming Driver (5-100%) AC 100-120V 50/60HZ or AC 200-240V 50/60HZ 3. 0-10V Dimming Driver AC100-240V 50/60HZ 4. Dali Dimming Driver AC100-240V 50/60HZ
LED Driver Features驅動特性 Funciones del controlador de LED	POWER FACTOR : PF>0.90 @ Full Load TOTAL HARMONIC DISTORTION: THD< 20%
Control Protocol-控制協議 Protocolo de Control	0-10V / Dali
Beam Angle光束角ángulo de haz	• 15° 24° 34° 60°
Light Source Brand-光源品牌-Fuente de luz de marca	CREE
"Lumen Maintenance LM-80 Reported by TM-21"@ 25°	L70(10k) > 63,500 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	• 80 • 90
Chromaticity Tolerance (initial Macadam) 色度容差 (初始Macadam) Tolerancia de cromaticidad (Macadam inicial)	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	• 110 Lm/w(2700K), 120 Lm/w(3000K), 130 Lm/w(4000K), • 130 Lm/w(5000K), 130 Lm/w(6500K),
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	• 140 Lm/w(2700K), 150 Lm/w(3000K), 160 Lm/w(4000K), • 160 Lm/w(5000K), 160 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and Polycarbonate Diffuser 壓鑄鋁和PC擴散器 Difusor de policarbonato y aluminio fundido
Housing Color外殼顏色color de la carcasa	Matte white / Matte black啞光白色 / 啞光黑色Blanco mate / Matte black
Ingress Protection-防護等級 Protección de ingreso	IP20
Environment-使用環境-medio ambiente	Indoor
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcion amento	-30 °C / +50 °C
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC/EN 60598-1 ; IEC/EN 60598-2-1 ; IEC/ EN62493 ; IEC/EN 62301 ; IEC TR 62778 & IEC 62471 ;ROHS LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547
Certification-認證-Certificación	      

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [TECO-36W](#)

TECO - -
[Power Consumption](#)


Power Consumption	
Code	Description
24W	24W
33W	33W
36W	36W
40W	40W

BEAM ANGLE


15°

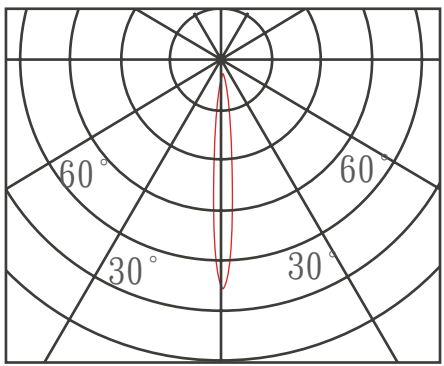


24°

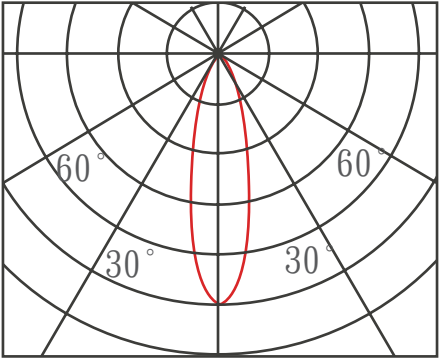


34°

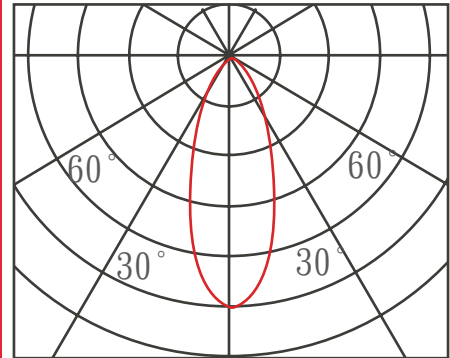

60°

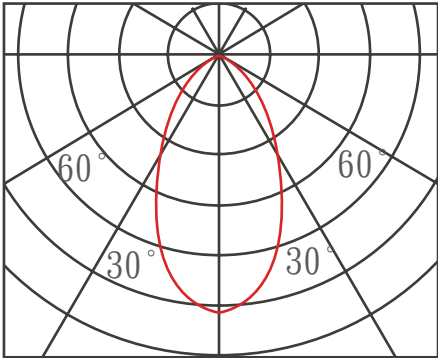

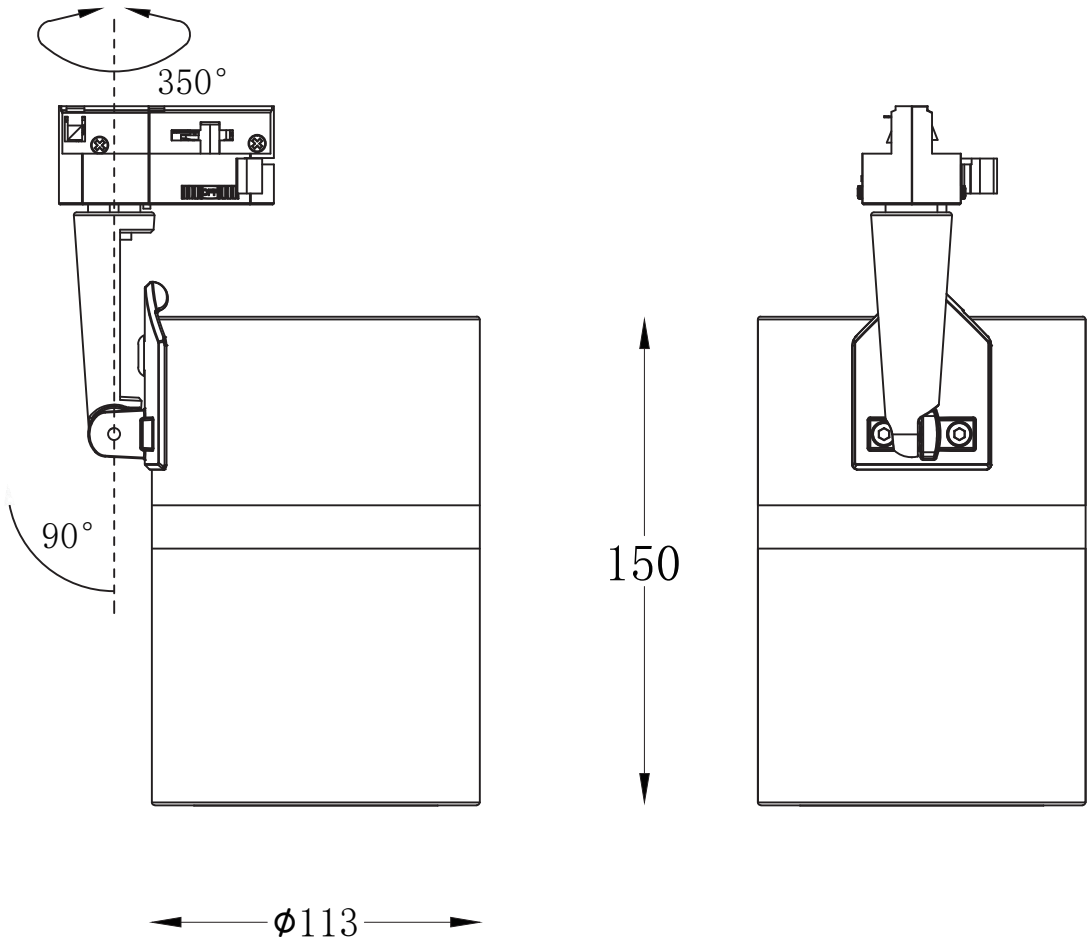

Unit: mm