

TEKNA

Max 24W








- Housing: die-cast aluminium, powder-coated whit Optical PMMA Lens.
- Integrated- DALI driver Dimming range 1 to 100 %
- Rotated Through 355° and Tilted up to 90°.

Technical Data

Luminaire Type-安裝方式Tipo de luminaria

Track Mounted Type 軌道燈Tipo montado en pista

Dimension-尺寸-Dimensión	Dia 93x L: 195 x H: 147mm			
Input Voltage-輸入電壓-Voltaje de entrada	220 – 240 VAC 50 / 60 Hz			
Power Consumption Max-燈具功率 Consumo de energía Max	10W	15W	20W	24W
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type or Remote-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. Dali Dimming Driver Dimming range 1 to 100 % 2. On/Off			
Beam Angle 光束角 ángulo de haz	20°	30°	45°	60°
Light Source -光源-Fuente de luz	COB LED			
"Lumen Maintenance LM-80 Reported by TM-21"	L70(10k) > 60000 hrs			
LED Life-LED壽命-La vida del LED	>60,000 hours			
Color -顏色-Color Color Temperature 色溫 Temperatura del color	• BLUE (450-460nm) RED (620-630nm) Green (520-530nm) Yellow (590-595nm) • Temperature 2700K 3000K 4000K 6500K			
Color Rendering Index-顯色指數 Índice de reproducción cromática	>90			
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM			
Luminaire Efficacy燈具效率 La eficacia de la luminaria	40lm/w @BLUE 90lm /w 2700K	80 lm/w @RED 90lm /w 3000K	90 lm/w @Green 100lm /w 4000K	80 lm/w @ Yellow 110lm /w 6500K
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	70lm/w @BLUE 120lm /w 2700K	110 lm/w @RED 120lm /w 3000K	120 lm/w @Green 140lm /w 4000K	110 lm/w @ Yellow 150lm /w 6500K
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and acrylic壓鑄鋁和亞克力 Fundición de aluminio y acrílico			
Housing Color 外殼顏色 color de la carcasa	Powder Coating : Matte white / Matte black 粉末塗料：啞光白色 / 啞光黑色 Recubrimiento en Polvo: Blanco mate / Matte black			
Ingress Protection-防護等級 Protección de ingreso	IP20			
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación			
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C			
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC 60598-1 / IEC 60598-2-1 LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547/ IEC62384			
Certification-認證-Certificación	    			

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [TEKNA-20W](#)

TEKNA - - _____
Power Consumption


Power Consumption	
Code	Description
10W	10W
15W	15W
20W	20W
24W	24W

BEAM ANGLE


20°

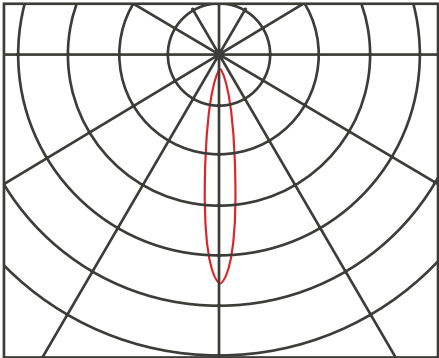


30°

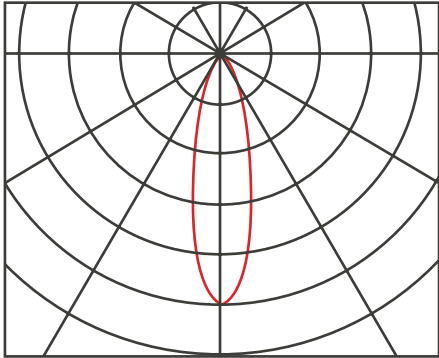


45°

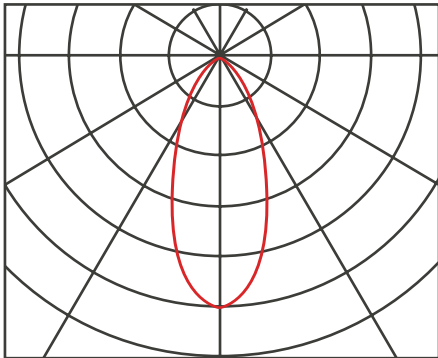

60°

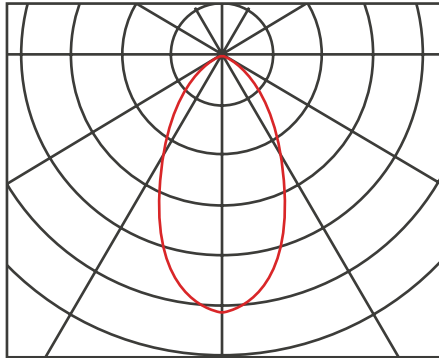

Technical Drawing

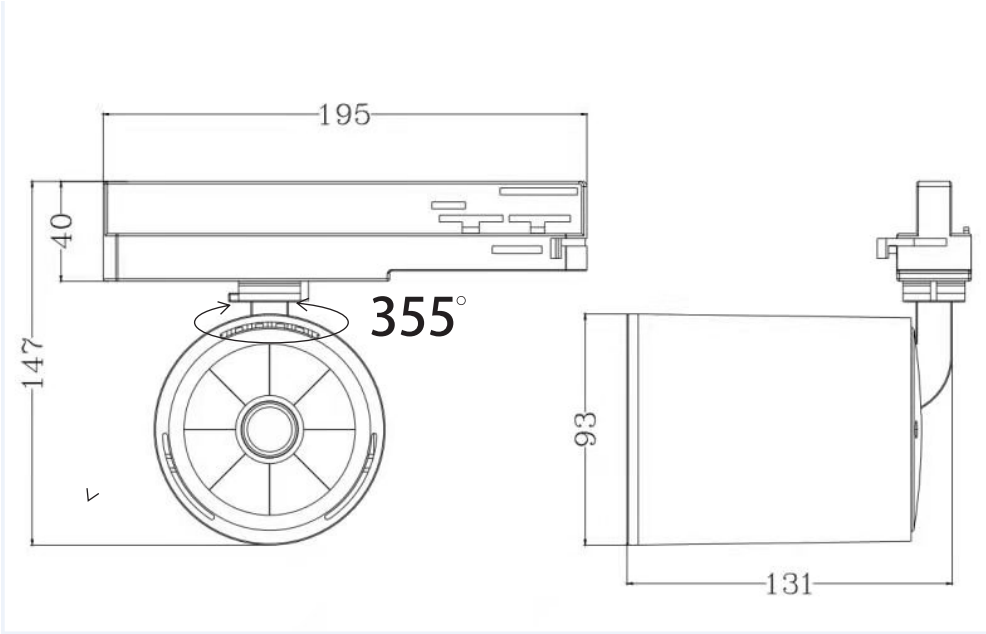

Unit: mm