





WALENA-SLIM

Max. 2 X 15W



- Housing: Extrusion aluminium housing with corrosion -resistance powder coating and die-cast aluminium cover.
- Anti-glare and distribute comfortable light
- Tempered and safe glass
- Ingress Protection: IP65
- LED module: high-power CREE LEDs Array, CRI>80 or >95, LM-80 performance approval >50,000 hours.
-

Technical Data

Luminaire Type 安裝方式 Tipo de luminaria	Wall Mounted Type 壁掛式 Tipo montado en la pared
Dimension-尺寸-Dimensión	Dia 90 x H180mm (Down) Dia 90 x H 240mm (Up & Down)
Power Consumption Max 燈具功率 Consumo de energía Max	1X12W 2X12W 1X15W 2X15W
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ
LED Driver Features驅動特性 Funciones del controlador de LED	POWER FACTOR : PF \geq 0.90 @ Full Load TOTAL HARMONIC DISTORTION: THD< 20%
Light Source Brand-光源品牌-Fuente de luz de marca	CREE
Beam Angle光束角ángulo de haz	10° / 15° / 24° / 36° / 50° / Asymmetric
"Lumen Maintenance LM-80 Reported by TM-21"@25degree	L70(10k) > 63,500 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K/ 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80 > 90
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SCDM 標準偏差配色 < 3 SCDM Coincidencia de color estándar Desviación
Luminaire Efficacy燈具效率 La eficacia de la luminaria	80lm/w(2700K), 85lm/w(3000K), 90lm/w(4000K), 90lm/w(5000K), 90lm/w(6500K)
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	130lm/w(2700K), 130lm/w(3000K), 140m/w(4000K), 140lm/w(5000K), 140lm/w(6500K)
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and tempered glass 壓鑄鋁和鋼化玻璃 Aluminio fundido a presión y vidrio templado
Housing Color外殼顏色 color de la carcasa	Polyester powders Coating--Matte Black RAL9005 聚酯粉末塗料--啞光黑 RAL 9005 Revestimiento en polvo de poliéster: negro mate RAL 9005
Ingress Protection-防護等級 Protección de ingreso	IP65
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Certification-認證-Certificación	   

Project	Fixture#	Date
		Firm



Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [WALENA-12W](#)

WALENA-SLIM - - _____
Power Consumption


Power Consumption	
Code	Description
12W	1 X 12W
24W	2X 12W
15W	1 X 15W
30W	2 X 15W

BEAM ANGLE


10°

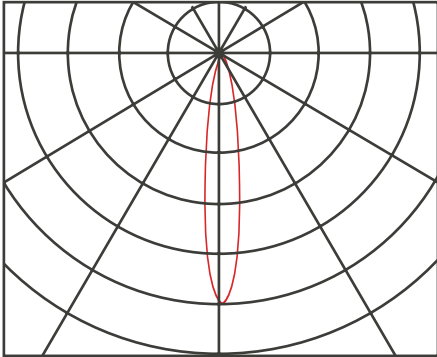


15°

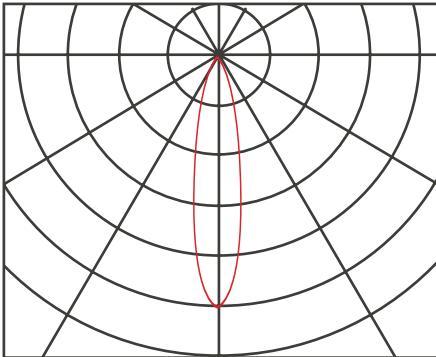


24°

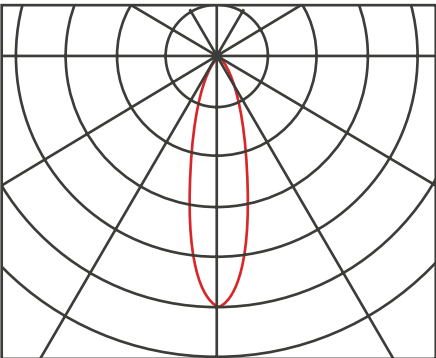


36°

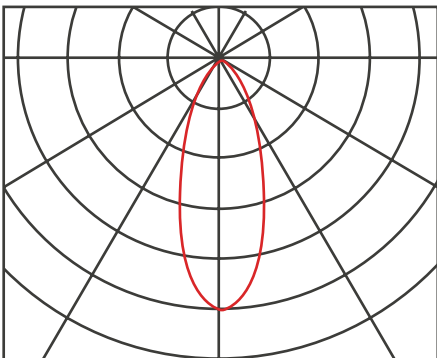

50°

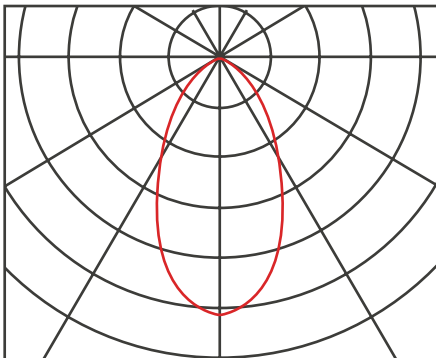

Technical Drawing

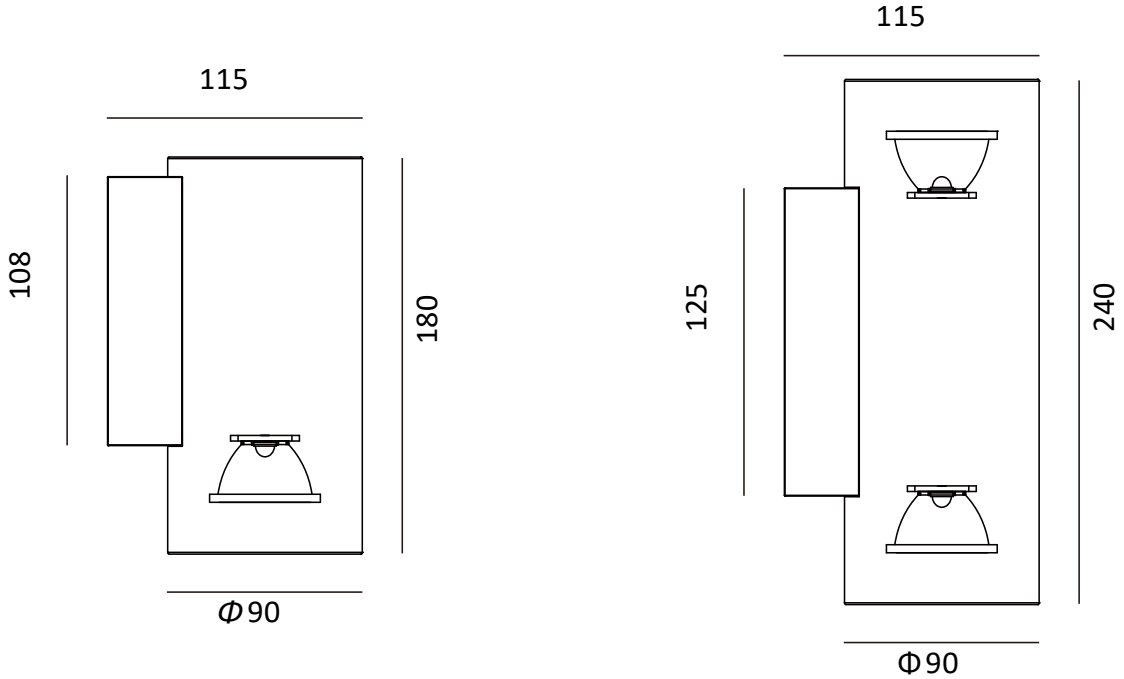

Unit: mm