

WALTE









D150mm 2x30W Max IP65



LED OUTDOOR WALL MOUNTED UP AND DOWN LIGHT.

- Housing: Extrusion aluminium housing with corrosion -resistance powder coating and die-cast aluminium cover.
- Anti-glare and high purity anodized aluminum reflector to distribute comfortable light
- Tempered and safe glass and Stainless Steel Screw and Anti-aging Gasket
- Ingress Protection: IP65 and Mech impact protection: IK10

Technical Data

Luminaire Type-安裝方式Tipo de luminaria	Surface Mounted Type明裝式燈具Superficie Tipo Montado		
Dimension-尺寸-Dimensión	• DIA: 150 x H: 200 mm x D: 70mm		DIA: 150 x H: 300 mm x D: 70mm
QTY of LEDs-燈珠數量-CANT de LEDs	Down Light or Up Light 1 pcs CREE LED Array Up and Down Light 2 pcs CREE LED Array		
Input Voltage-輸入電壓-Voltaje de entrada	AC100-240V 50/60HZ		
Power Consumption Max-燈具功率 Consumo de energía Max	• Down Light or Up Light : 1 x 15 W	1 x 20 W	1 x 30 W
	• Up and Down Light : 2 x 15 W	2 x 20 W	2 x 30 W
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC100-240V 50/60HZ 2. ELV Dimming Driver (5-100%) AC 100-120V 50/60Hz or AC 200-240V 50/60HZ 3. 0-10V Dimming Driver AC100-240V 50/60HZ 4. Dali Dimming Driver AC100-240V 50/60HZ 5. DMX Driver AC100-240V 50/60HZ		
LED Driver Features 驅動特性 Funciones del controlador de LED	POWER FACTOR : PF>0.90 @ Full Load TOTAL HARMONIC DISTORTION: THD< 20%		
Control Protocol-控制協議 Protocolo de Control	0-10V / Dali / DMX 512 / RDM / ZIGBEE Wireless Control		
Beam Angle 光束角 ángulo de haz	• 24°	30°	36° 60°
Light Source Brand-光源品牌-Fuente de luz de marca	CREE - (Photobiological safety-IEC 62471 'Risk Group 1' (low risk))		
"Lumen Maintenance LM-80 Reported by TM-21"	L70(10k) > 60,000 hrs		
LED Life-LED壽命-La vida del LED	>60,000 hours		
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K		
Color Rendering Index-顯色指數 Índice de reproducción cromática	• > 80 • >90		
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM		
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	• 80 Lm/w(2700K), • 90 Lm/w(5000K),	80 Lm/w(3000K), 90 Lm/w(6500K),	85 Lm/w(4000K),
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	• 120 Lm/w(2700K), • 140 Lm/w(5000K),	120 Lm/w(3000K), 140 Lm/w(6500K),	130 Lm/w(4000K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminum and tempered glass 壓鑄鋁和鋼化玻璃 Fundición de aluminio y vidrio templado		
Housing Color 外殼顏色 color de la carcasa	Powder Coating :Black / White / Gray 粉末塗料: 黑色燈身 / 白色燈身 / 灰色燈身 Recubrimiento en Polvo: Negro / Blanco / Gris		
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C		
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación		
Ingress Protection-防護等級 Protección de ingreso	IP65		
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK10		
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: IEC / EN 60598-1;IEC/EN 60598-2-5; IEC TR62778 IEC62471 (RG1); IEC 62031; EN62493 RoH LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574;EN 55015		
Certification-認證-Certificación	       		

Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [WALTE-60W](#)


WALTE - -

Power Consumption


Power Consumption	
Code	Description
15W	1x15W
20W	1x20W
30W	1x30W
30W	2x15W
40W	2x20W
60W	2x30W

BEAM ANGLE


24°

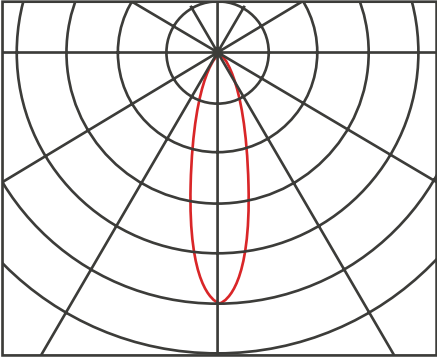


30°

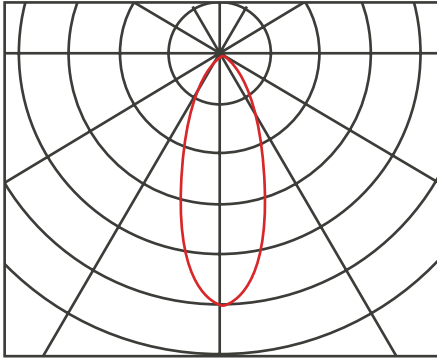



36°

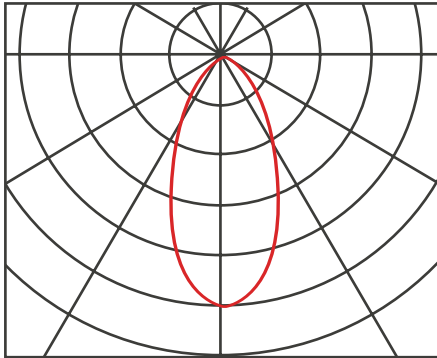

60°

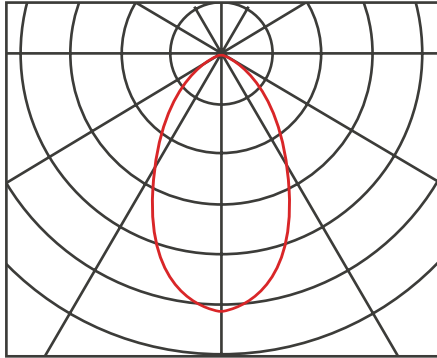

Technical Drawing

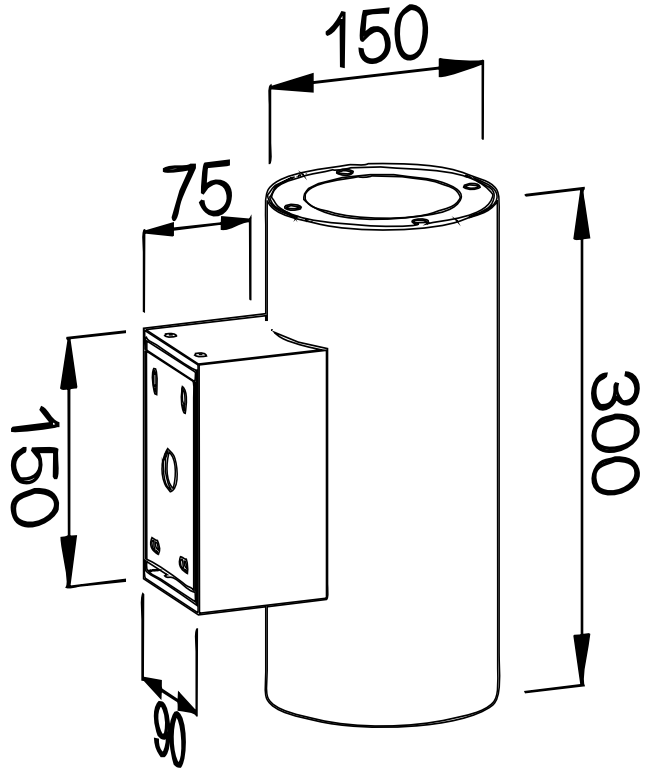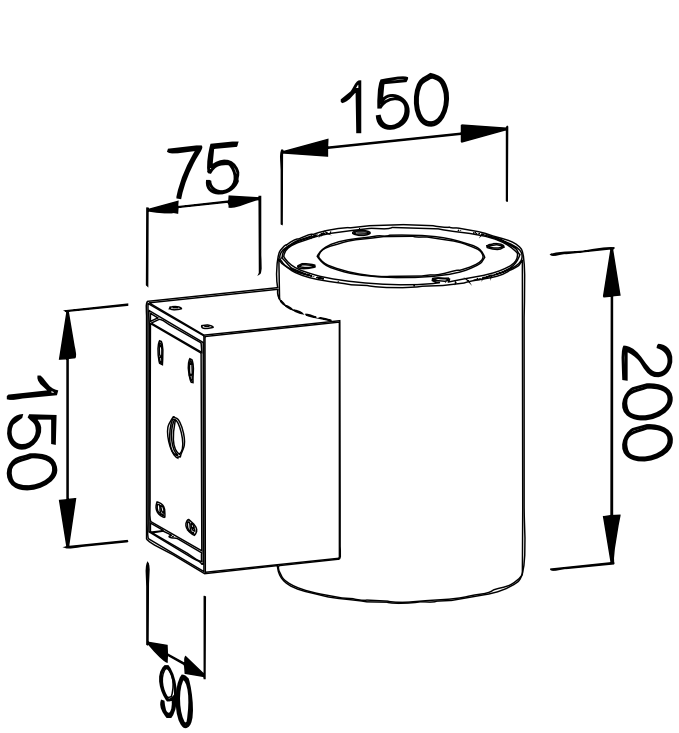

Unit: mm