





## WEC-X

6W-10W IP66



- Body and bracket in die-cast aluminium with Anti UV Frosted PC Lens
- Corrosion -resistance Powder coated
- Ingress Protection: IP66 and IK08 Mech impact protection
- ABS plastic recessed housing.

## Technical Data

Luminaire Type-安裝方式 Tipo de luminaria	Recessed Wall Light Type嵌入式燈具 Tipo de Recessed
Dimension-尺寸-Dimensión	• W: 170 x H: 70 x D: 72mm • W: 250 x H: 70 x D: 87mm
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ
Power Consumption Max-燈具功率 Consumo de energía Max	• 3W @ W: 170 x H: 70 x D: 72mm • 5W @ W: 250 x H: 70 x D: 87mm
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60H
Beam Angle光束角ángulo de haz	Asymmetric
Light Source Brand-光源品牌-Fuente de luz de marca	LUMILEDS
"Lumen Maintenance LM-80 Reported by TM-21"	L70(10k) > 63,500 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	3000K / 4000K / 5000K
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy燈具效率 La eficacia de la luminaria	40 Lm/w(3000K), 50 Lm/w(4000K), 50 Lm/w(5000K),
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	120 Lm/w(3000K), 130 Lm/w(4000K), 130 Lm/w(5000K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminium with Anti UV Frosted PC 壓鑄鋁和抗紫外線磨砂 PC 罩 Aluminio fundido a presión con policarbonato anti UV esmerilado.
Housing Color外殼顏色color de la carcasa	Sand White RAL 9003 / Sand Black RAL 9005 / Sand Gray RAL9006 砂白RAL 9003 / 砂黑 RAL 9005 / 砂灰色 RAL9006 Blanco arena RAL 9003 / Negro arena RAL 9005 / Gris arena RAL9006
Ingress Protection-防護等級 Protección de ingreso	IP66
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK08
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: LVD: IEC/EN 60598-1;EN / IEC/EN 60598-2-2;IEC62471;IEC/EN 62031; IEC/EN 62493 ; IEC/EN 62471 (Risk Group 1) • LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; • IEC/EN 61000-3-3;IEC/EN61574;EN 55015 ; IEC /EN 62384
Certification-認證-Certificación	  

Project	Fixture#	Date
		Firm

## Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [WEC-3W](#)

WE -       - \_\_\_\_\_  
Power Consumption


Power Consumption	
Code	Description
<a href="#">3W</a>	3W
<a href="#">5W</a>	5W



# Beam Angle

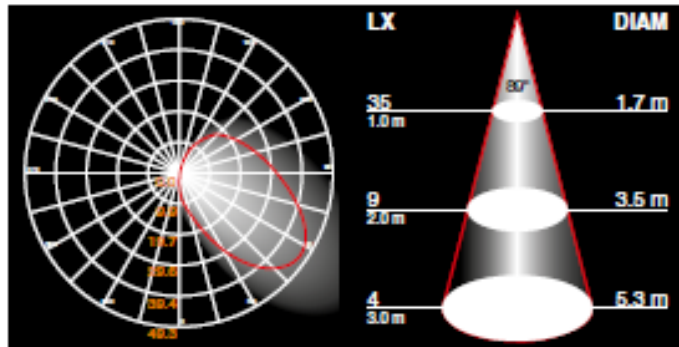

3W

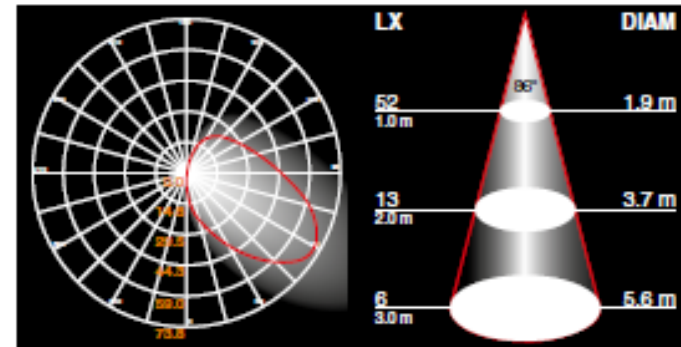

5W

# Technical Drawing

