






## WED

Dia 280mm Max 20W IP65



LED WALL LIGHT. Housing: die-casting corrosion resistant aluminium with opal polycarbonate diffuser. Stainless steel allen key screws.  
Integrated CE Certified LED Driver to comply the Class I Electrical protection and material comply Hot wire test 850°C

## Technical Data

Luminaire Type-安裝方式Tipo de luminaria	Wall Mounted Type壁掛式燈具Tipo montado en la pared
Dimension-尺寸-Dimensión	• Dia: 280 x H: 80 mm
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60Hz
Power Consumption Max-燈具功率 Consumo de energía Max	6W    10W    15W    20W
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Constant Current LED Driver: Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 3. 1 -10V Dimming Driver AC220-240V 50/60HZ 4. Dali 1-100% Dimming Driver AC220-240V 50/60HZ 5. Emergency Backup >2 hours or >3 hours @ < 12 charger hours 應急電池/Copia de seguridad de emergencia
LED Driver Features 驅動特性 Funciones del controlador de LED	• POWER FACTOR : PF>0.90 or PF 0.95    TOTAL HARMONIC DISTORTION: THD< 20% • LIFE HOUR : 50,000 Hours • Refer to LED Driver data sheet
Control Protocol-控制協議 Protocolo de Control	1-10V / Dali / Dali 2
Beam Angle光束角ángulo de haz	Asymmetrical
Light Source Brand-光源品牌-Fuente de luz de marca	SAMSUNG
"Lumen Maintenance LM-80 Reported by TM-21"@ 25°	L70> 63,500 hrs
LED Life-LED壽命-La vida del LED	Ambient temperature ta = 25 °C > 200,000 h: L 80 B 50 Ambient temperature ta =50 °C > 180,000 h: L 80 B 50
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80
Chromaticity Tolerance (initial Macadam) 色度容差 (初始Macadam) Tolerancia de cromaticidad (Macadam inicial)	Standard Deviation Colour Matching < 5 SDCM 標準偏差配色 < 5 SDCM Coincidencia de color estándar Desviación < 5 SDCM
Luminaire Efficacy燈具效率 La eficacia de la luminaria	• 50 Lm/w(2700K),    50 Lm/w(3000K),    55 Lm/w(4000K), • 60 Lm/w(5000K),    60 Lm/w(6500K),
LED Source Luminous EfficacyLED光源光效 Fuente luminosa LED Eficacia	• 150 Lm/w(2700K),    150 Lm/w(3000K),    155Lm/w(4000K), • 160 Lm/w(5000K),    160 Lm/w(6500K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminium and Anti UV Opal Polycarbonate Diffuser 壓鑄鋁和紫外線乳白PC擴散器 Lente óptica de aluminio fundido y policarbonato anti-UV
Housing Color外殼顏色color de la carcasa	• Matte black RAL9005 / Grey RAL9006 / White RAL 9003 • 啞光黑色RAL9005 / 啞光灰色RAL9006 / 白色RAL 9003 • Negro mate RAL9005 / Gris RAL9006 / Blanco RAL 9003
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Ingress Protection-防護等級 Protección de ingreso	IP65
Mech impact protection機械衝擊保護 Protección contra impactos mecánicos	IK08
Comply Testing Standard符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC 60598-1 / IEC 60598-2-1 / Hot Wire Testing: 850°C LED Driver: EN 55015 / IEC 61000-3-2 / IEC 61347-1 / IEC 61347-2-13 / IEC 61547
Certification-認證-Certificación	        

Project	Fixture#	Date
		Firm



## Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [WED-20W](#)

WED - - \_\_\_\_\_  
Power Consumption

Power Consumption	
Code	Description
<a href="#">6W</a>	6W
<a href="#">10W</a>	10W
<a href="#">15W</a>	15W
<a href="#">20W</a>	20W

# Beam Angle

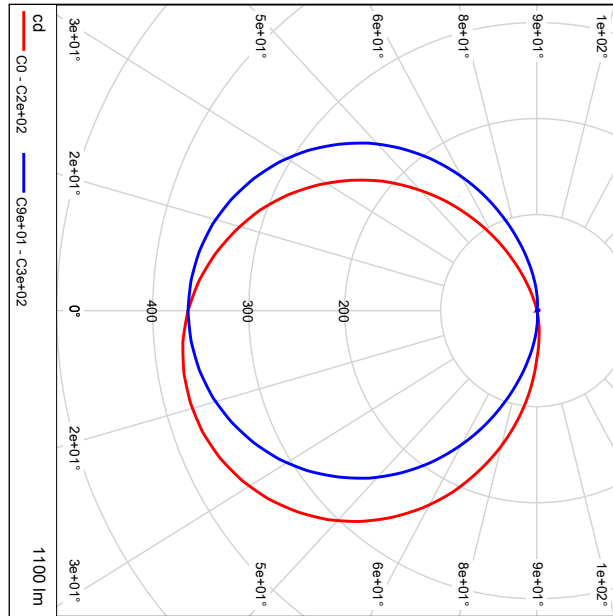

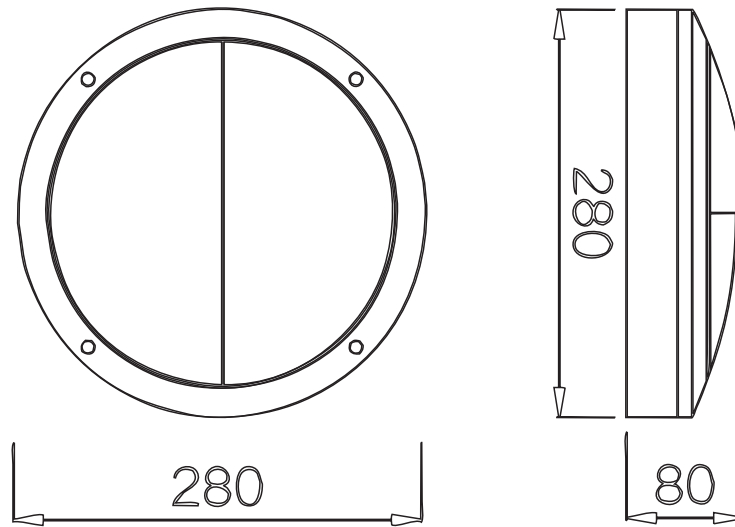

Unit: mm