





WEEL

18W Max IP65



- Housing: Stainless Steel and Glass
- Ingress Protection: IP65

Technical Data

Luminaire Type-安裝方式-Tipo de luminaria	Wall Mounted Type-壁掛式燈具-Tipo montado en la pared
Dimension-尺寸-Dimensión	W: 150 x H: 650 mm x D: 230mm
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ
Power Consumption Max-燈具功率 Consumo de energía Max	18W
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ
Control Protocol-控制協議 Protocolo de Control	0-10V / Dali
Beam Angle 光束角 ángulo de haz	360°
Light Source Brand-光源品牌-Fuente de luz de marca	OSRAM
Photobiological safety-IEC 62471 / of Luminaire 光生物安全檢驗(IEC/EN 62471) 结果: Seguridad fotobiológica-IEC 62471	Risk Group 1 (RG1) 1 類危險 (低危) Grupo de riesgo 1
"Lumen Maintenance LM-80 Reported by TM-21"	L70 > 54,000 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	100 Lm/w(2700K), 110Lm/w(3000K),
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	140 Lm/w(2700K), 140 Lm/w(3000K),
Housing materials-外殼材料 Materiales de la carcasa	Stainless Steel & line glass 不銹鋼和線條玻璃 Acero inoxidable y línea de vidrio.
Housing Color外殼顏色 color de la carcasa	UV resistant Powder Coating : Copper 抗紫外線粉末塗料: 銅色
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~100%, non-condensing-不結霜 sin condensación
Ingress Protection-防護等級 Protección de ingreso	IP65
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: EN 60598-1;EN 60598-2-1; IEC TR62778 IEC62471 ; IEC 62031; RoHS LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3;IEC/EN61574;EN 55015
Certification-認證-Certificación	   

Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [WEEL-18W](#)

WEEL - 18W
Power Consumption

Power Consumption	
Code	Description
18W	18W



Technical Drawing

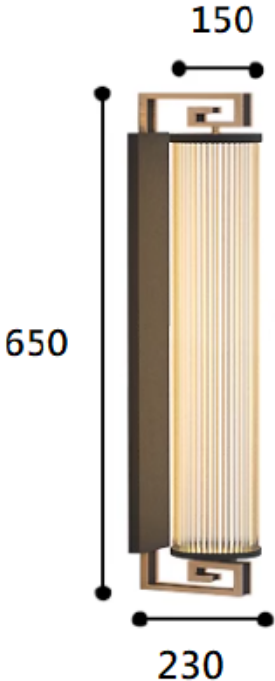

Unit: mm