

WEER S

Dia 38 / 52 / 64 / 80 / 100mm



316 stainless steel faceplate, high pressure die-cast housing, surface with electrostatic plastic coating.
Lampshade adopts high strength toughened glass, resist the impact and friction.
Adopt American CREE original LED light source, high flus output, excellent consistency of light color.

Technical Data


Installation method / 安裝方式 metodo de instalacion	Recessed In Ground Type / 內嵌式地埋燈 / Empotrada en el suelo del Tipo		
Power Consumption / 燈具功率 Consumo de energía	1W 2W @ Dia 38 x H 60 / 75 mm 2W 3W @ Dia 52 x H 75 mm 3W 4W 5W @ Dia 64 x H 74 mm 5W 6W 7W @ Dia 80 x H 85 mm 8W 9W 10W @ Dia 100 x H 115 mm		
Input Voltage or Current / 輸入電壓或電流 Voltaje o corriente de entrada	350mA / 500mA / 700mA DC24V DC DC24V DC + DMX512 Decoder 220V AC		
LED Driver Type LED驅動款式 Tipo de controlador LED	Remoted Type LED Driver - Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 0/1 -10V Dimming Driver AC220-240V 50/60HZ 3. DALI Dimming Driver AC220-240V 50/60HZ 4. DMX Driver AC220-240V 50/60HZ 5. RDM Driver AC220-240V 50/60HZ		
Control Protocol / 控制協議 / Protocolo de Control	0/1-10V / DALI / DMX 512 / RDM		
Beam Angle光 / 束角 / ángulo de haz	5° 10° 12° 20° 25° 40° 60° Diffused(Frosted Glass)		
Light Source Brand / 光源品牌 Fuente de luz de marca	Cree / Osram / Luminus / Citizen / Tyanshine		
Lumen Maintenance LM-80 Reported by TM-21	L70 > 54,000 Hours		
LED Life / LED壽命 / La vida del LED	>100,000 hours		
Color Temperature / 色溫 / Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K Color : RED , GREEN ; BLUE, YELLOW		
Color Rendering Index / 顯色指數 Índice de reproducción cromática	>80 >90		
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM		
Luminaire Efficacy / 燈具效率 La eficacia de la luminaria	Transparent Tempered Glass 50 Lm/w(2700K) 60 Lm/w(3000K) 70 Lm/w(4000K) 70 Lm/w(5000K) 70 Lm/w(6500K) 40 Lm/w RED 50 Lm/w GREEN 20 Lm/w BLUE 40 Lm/w YELLOW Frosted Tempered Glass 35 Lm/w(2700K) 40 Lm/w(3000K) 40 Lm/w(4000K) 45 Lm/w(5000K) 45 Lm/w(6500K) 25 Lm/w RED 30 Lm/w GREEN 15 Lm/w BLUE 25 Lm/w YELLOW		
LED Source Luminous Efficacy / LED光源光效 Fuente luminosa LED Eficacia	120 Lm/w(2700K) 130 Lm/w(3000K) 140 Lm/w(4000K) 140 Lm/w(5000K) 140 Lm/w(6500K) 90Lm/w RED 100 Lm/w GREEN 45Lm/w BLUE 90Lm/w YELLOW		
Housing materials / 外殼材料 Materiales de la carcasa	Die cast aluminium Tempered Glass with #316 Stainless Steel Cover 壓鑄鋁, 乳白或透明鋼化玻璃和#316不銹鋼面蓋 Aluminio fundido, vidrio templado lechoso o transparente con cubierta de acero inoxidable n. ° 316		
Housing Color / 外殼顏色 Color de la carcasa	#316 Stainless Steel Cover #316不銹鋼面蓋 # 316 de la cubierta de acero inoxidable #316 Stainless Steel Chrome Black #316不銹鋼鉻黑 # 316 Acero inoxidable Cromo Negro		
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-10 °C / +45 °C		
Operating Humidity / 工作濕度 Humedad de funcionamiento	0~90%, non-condensing / 不結霜 sin condensación		
Ingress Protection/ 防護等級 Protección de ingreso	IP67		
Impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK08		
Dimension / 尺寸 / Dimensión	Refer to Drawing / 參考圖紙 / Consulte el dibujo		
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: LVD: IEC 60598-1; IEC 60598-2-1; IEC62471; IEC 62031; IEC62471, ROHS TM21-L70 LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3; IEC/EN61574; EN 55015 ; IEC /EN 62384		

Certification / 認證 / Certificación




Beam Angle


5°

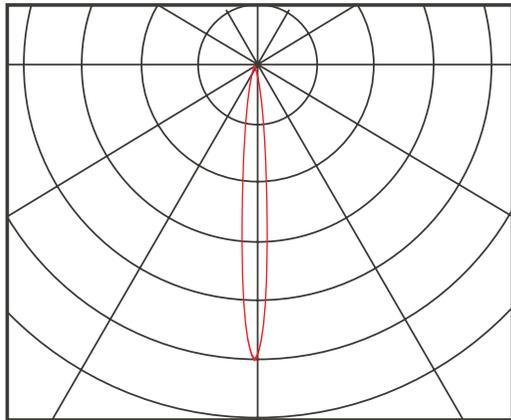


10°

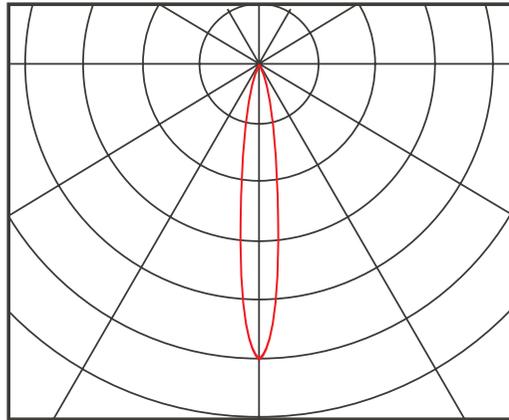


12°

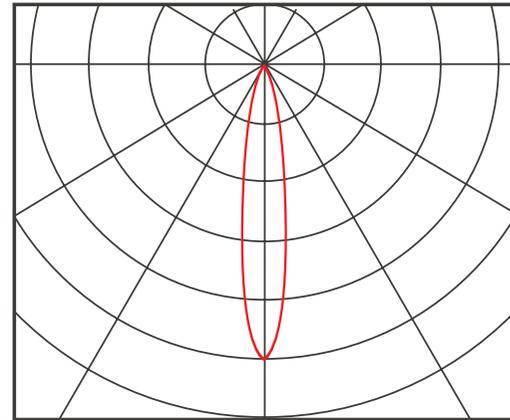


20°

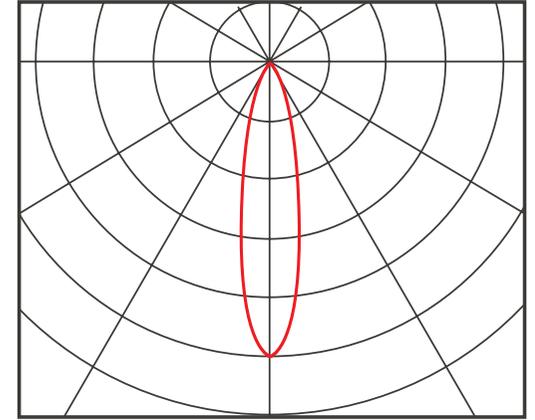


25°

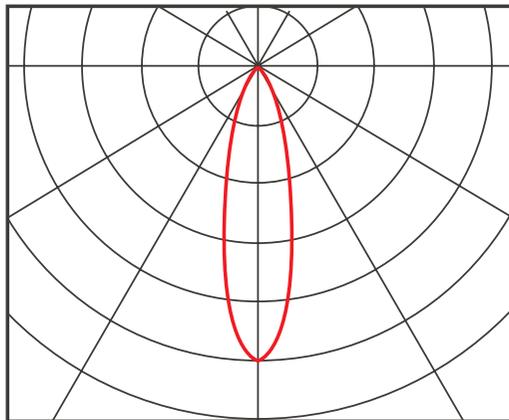


40°

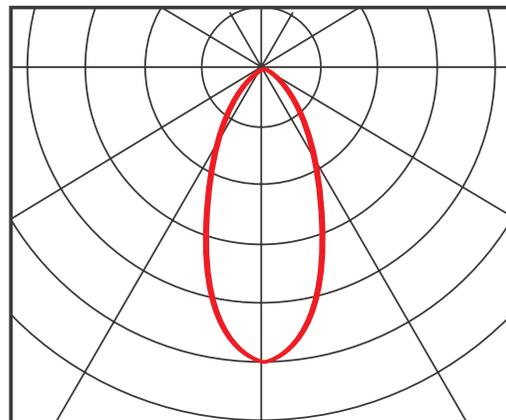

60°

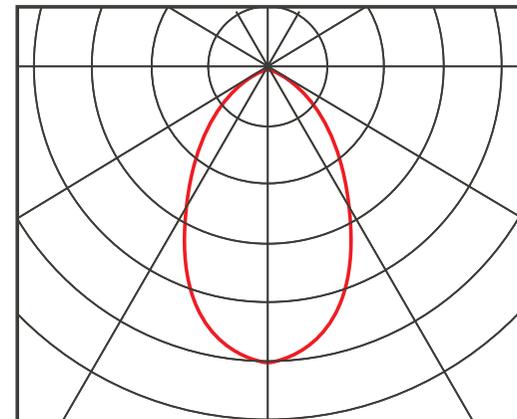


Technical Drawing

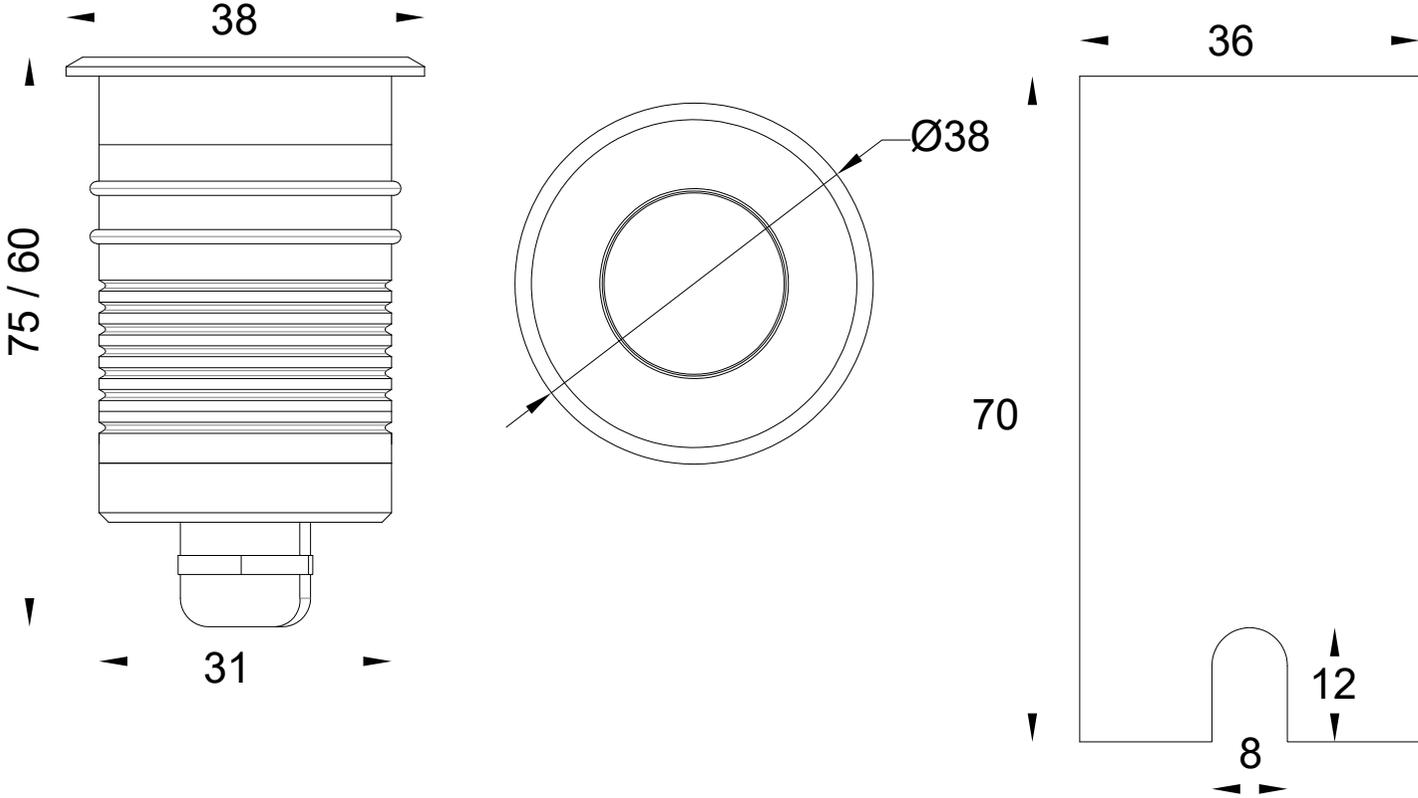




Unit: mm

Technical Drawing

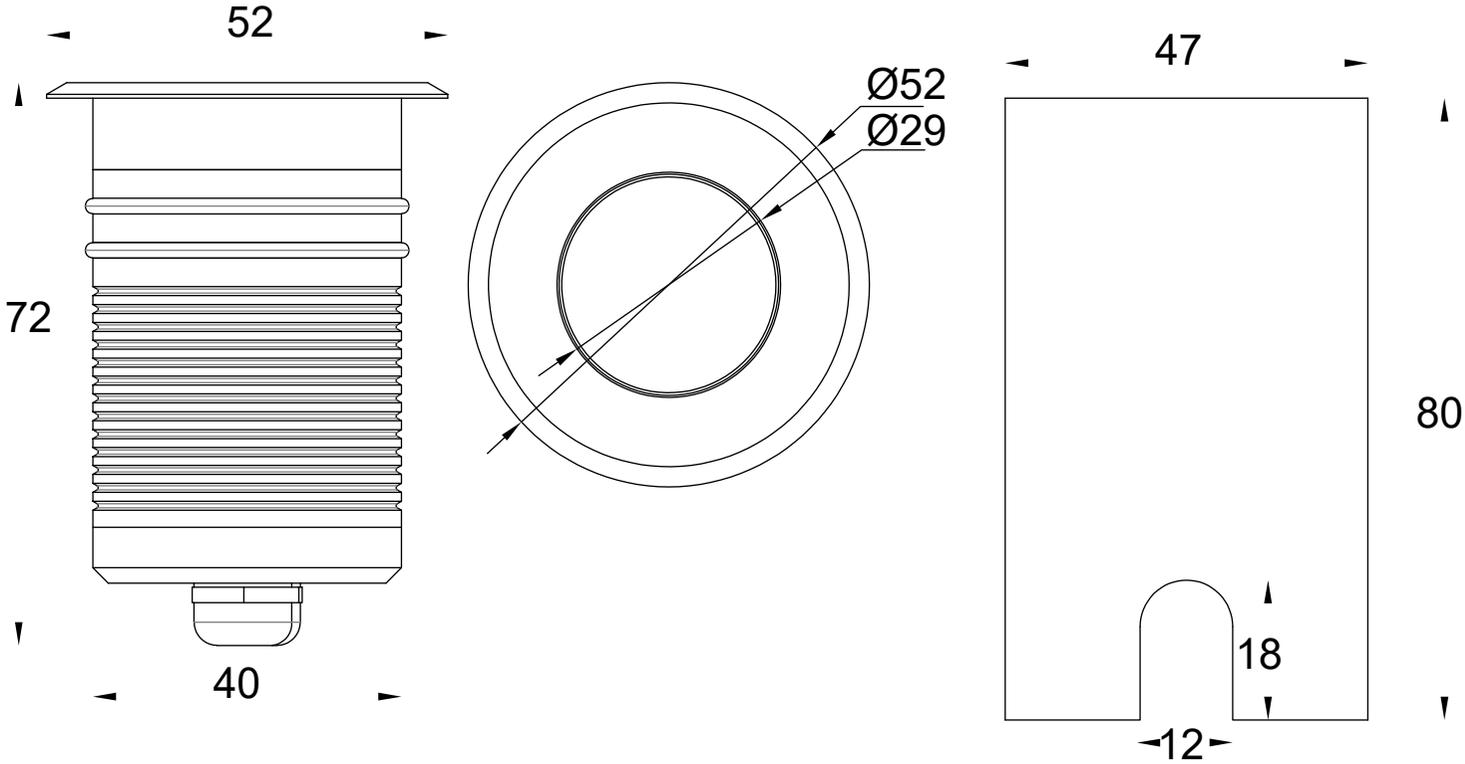




Unit: mm

Technical Drawing

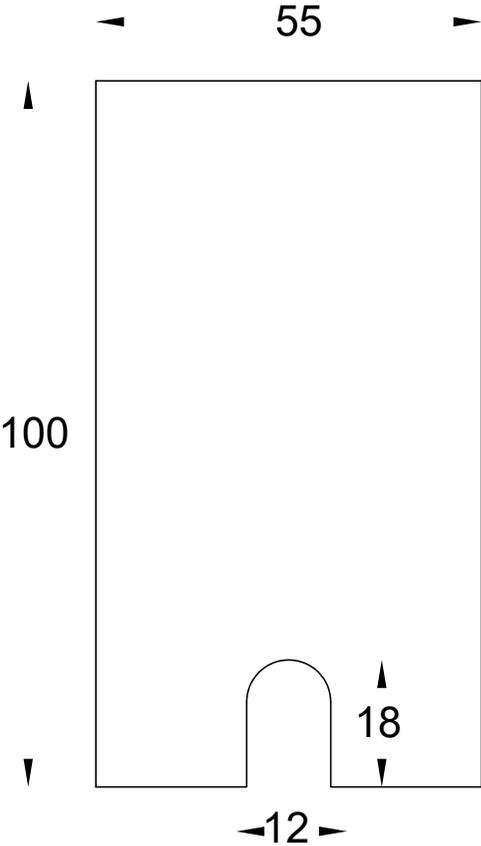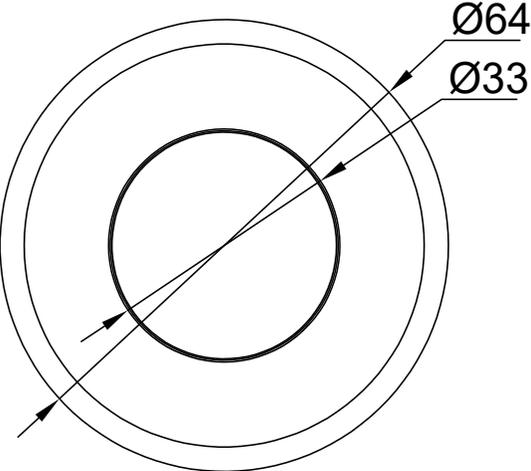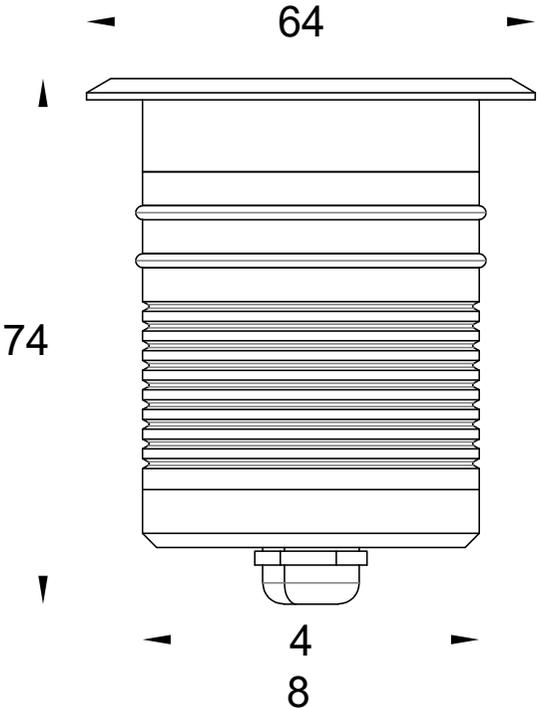


Unit: mm

Technical Drawing

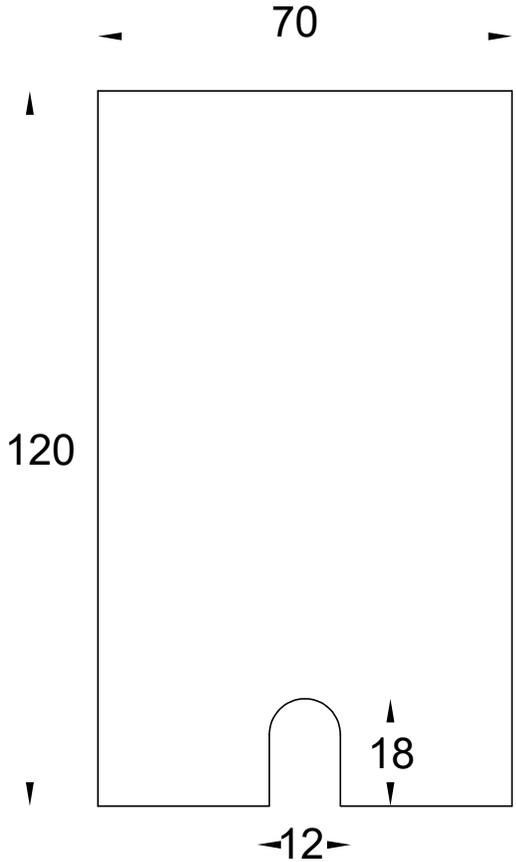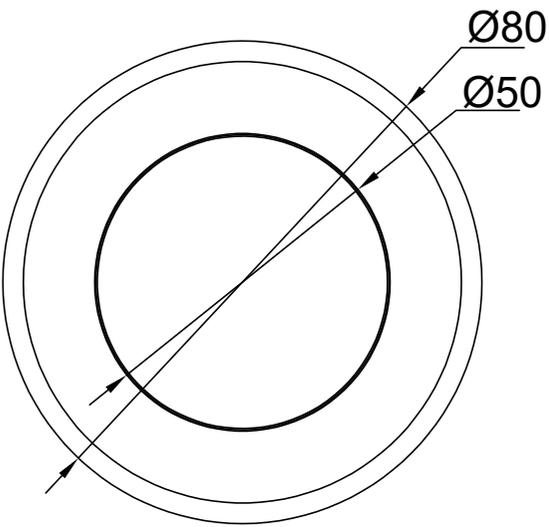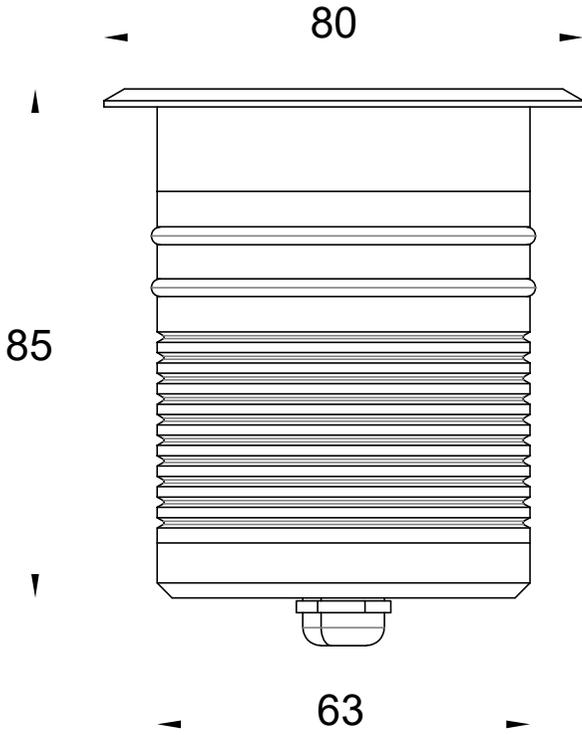

Unit: mm

Technical Drawing

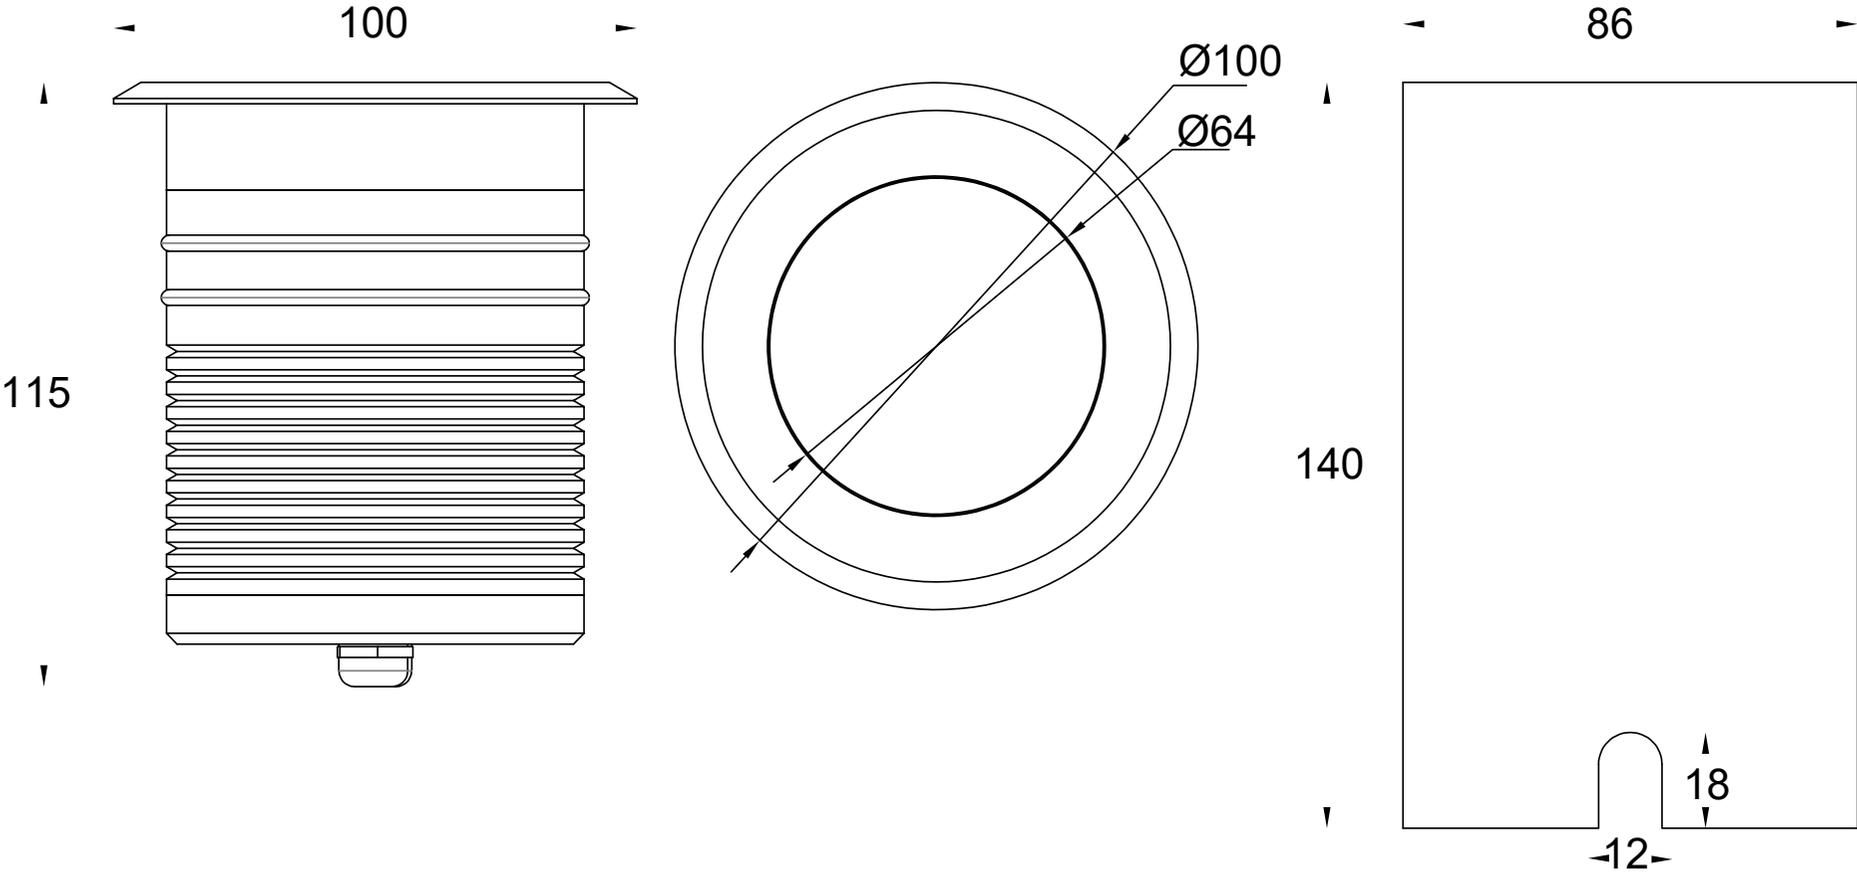

Unit: mm