



WEER X

Dia 38mm & 55mm 3W Max



Milky Glass



Clear Glass










316 stainless steel faceplate, high pressure die-cast housing, surface with electrostatic plastic coating.

Lampshade adopts high strength toughened glass, resist the impact and friction.

Adopt American CREE original LED light source, high flus output, excellent consistency of light color.

Technical Data

Luminaire Type 安裝方式/Tipo de luminaria	Recessed In-Ground Type 內嵌式地埋燈 Empotrada en el suelo del Tipo
Power Consumption Max 燈具功率 Consumo de energía Max	<ul style="list-style-type: none"> • 1W @ Dia 38mm • 2W @ Dia 55mm • 3W @ Dia 55mm
Input Voltage or Current / 輸入電壓或電流 Voltaje o corriente de entrada	<ul style="list-style-type: none"> • 350mA / 500mA / 700mA • DC24V • DC24V + DMX512 Decoder
LED Driver Type LED驅動款式 Tipo de controlador LED	Remoted-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. ELV Dimming Driver (5-100%) AC 220-120V 50/60Hz or AC 200-240V 50/60HZ 3. 0/1 -10V Dimming Driver AC220-240V 50/60HZ 4. DALI Dimming Driver AC220-240V 50/60HZ 5. DMX Driver AC220-240V 50/60HZ 6. RDM Driver AC220-240V 50/60HZ
Control Protocol 控制協議/Protocolo de Control	0/1-10V / DALI / DMX 512 / RDM / ZIGBEE Wireless Control
Beam Angle 光束角/ángulo de haz	25° 40° 60° 120°
Light Source Brand/光源品牌 Fuente de luz de marca	Cree / Osram / Lumileds
"Lumen Maintenance LM-80 Reported by TM-21"	L70(10k) > 54,000 hrs
LED Life/LED壽命 La vida del LED	>100,000 hours
Color Temperature / 色溫 /Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K Color : RED , GREEN ; BLUE, YELLOW
Color Rendering Index/顯色指數 Índice de reproducción cromática	<ul style="list-style-type: none"> • >80 • >90
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	Milky Glass Diffuser <ul style="list-style-type: none"> • 30 Lm/w(2700K), 40 Lm/w(3000K), 50 Lm/w(4000K), • 50 Lm/w(5000K), 50 Lm/w(6500K), 25Lm/w RED , • 30 Lm/w GREEN ; 10Lm/w BLUE, 25Lm/w YELLOW Clear Glass Diffuser <ul style="list-style-type: none"> • 50 Lm/w(2700K), 60 Lm/w(3000K), 70 Lm/w(4000K), • 70 Lm/w(5000K), 70Lm/w(6500K), 40Lm/w RED , • 50 Lm/w GREEN ; 20Lm/w BLUE, 40Lm/w YELLOW
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	<ul style="list-style-type: none"> • 120 Lm/w(2700K), 130 Lm/w(3000K), 140 Lm/w(4000K), • 140Lm/w(5000K), 140 Lm/w(6500K), 90Lm/w RED , • 100 Lm/w GREEN ; 45Lm/w BLUE, 90Lm/w YELLOW
Housing materials/外殼材料 Materiales de la carcasa	Die cast aluminium ,Milky or Clear tempered glass with #316 Stainless Steel Cover 壓鑄鋁, 乳白或透明鋼化玻璃和#316不銹鋼面蓋 Aluminio fundido, vidrio templado lechoso o transparente con cubierta de acero inoxidable n.º 316
Housing Color/ 外殼顏色 Color de la carcasa	#316 Stainless Steel Cover #316不銹鋼面蓋 # 316 de la cubierta de acero inoxidable #316 Stainless Steel Chrome Black #316不銹鋼鉻黑 # 316 Acero inoxidable Cromo Negro
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-20 °C / +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Ingress Protection/ 防護等級 Protección de ingreso	IP67
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK10
Pressure load 壓力負荷 Carga de presión	2,000 kg (~20 kN)
Dimension-尺寸-Dimensión	• Refer to Drawing 參考圖紙 Consulte el dibujo
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: LVD: IEC 60598-1; IEC 60598-2-1; IEC62471; IEC 62031; IEC62471, ROHS TM21-L70 LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; IEC/EN 61000-3-3; IEC/EN61574; EN 55015 ; IEC /EN 62384
Certification 認證-Certificación	      

Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [WEER-1W](#)


WEER-X – _____
Power Consumption

Power Consumption	
Code	Description
1W	1W @ Dia 38mm
2W	2W @ Dia 55mm
3W	3W @ Dia 55mm




Beam Angle


25°

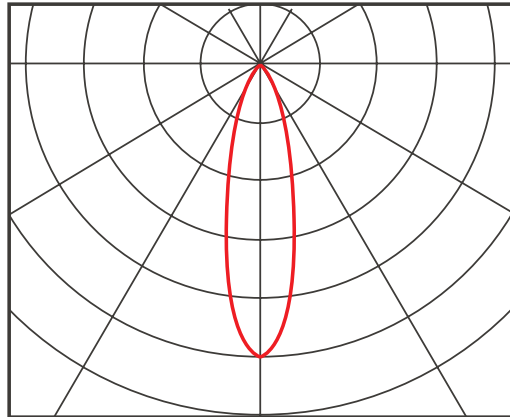


45°

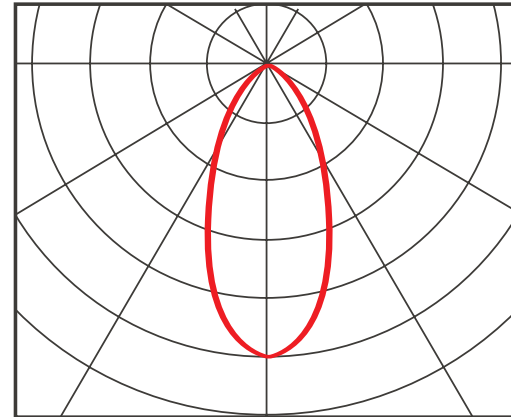


60°

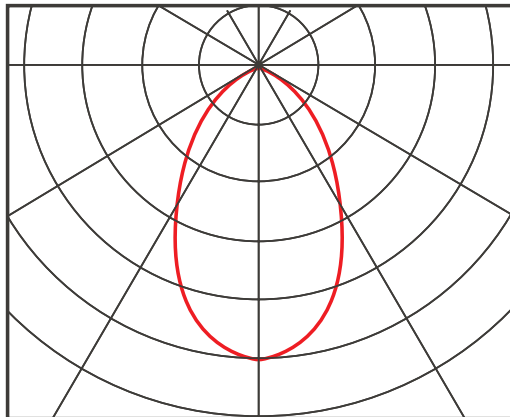

120°

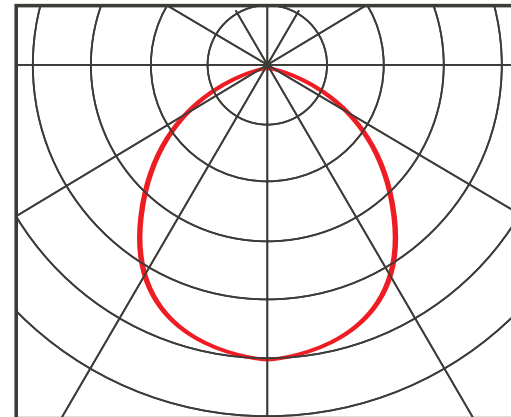


1W

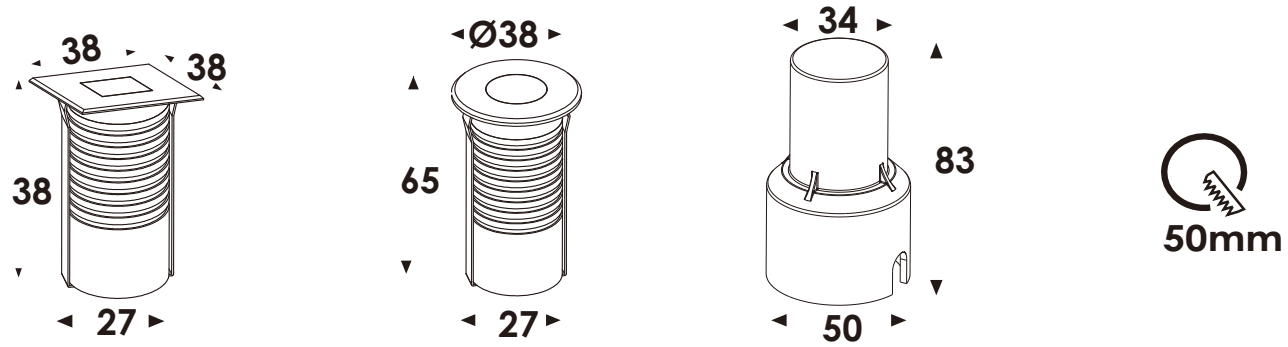

Mounting sleeve

2W / 3W

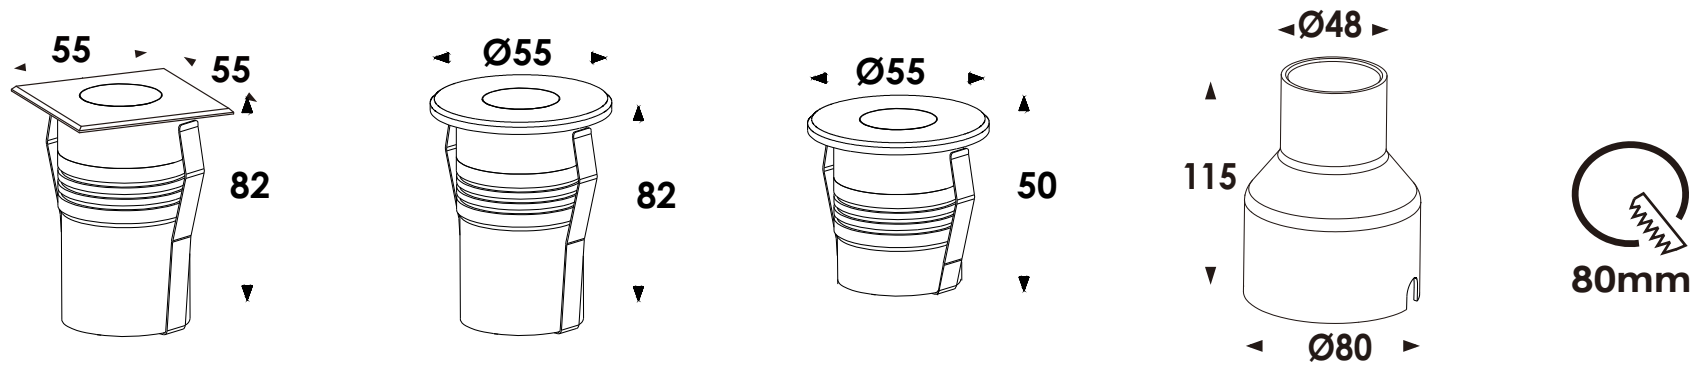

Mounting sleeve