

WIDE

Dia105mm IP65



- Body and bracket in die-cast aluminium with tempered Glass
- Corrosion -resistance Powder coated
- Silicon rubber gasket
- Ingress Protection: IP65
- ABS plastic recessed housing.

WIDE

Dia105mm IP65


DIMON

TECHNOLOGY

Technical Data

Luminaire Type-安裝方式/Tipobdebluminaria	Recessed Wall Light Type 嵌入式燈具 Tipo de Recessed
Dimension-尺寸-Dimensión	Dia 105x D: 71 mm Cut off: Dia 95x D: 90 mm
Input Voltage-輸入電壓-Voltaje de entrada	AC220-240V 50/60HZ
Power Consumption Max-燈具功率 Consumo de energía Max	5W
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated -type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Control 2. Dali Dimming---Remoted Type 3. 1-10V Dimming ---Remoted Type
Power Factor / 功率因數/Factor de potencia	PF: > 0.9 Total Harmonic Distortion <20% refer to LED Driver data sheet
Beam Angle 光束角/ángulo de haz	Asymmetric
Light Source Brand-光源品牌-Fuente de luz de marca	SMD 2835
Lumen Maintenance LM-80 Reported by TM-21@25°	L70> 45,000 hrs
LED Life-LED壽命-La vida del LED	> 60,000 hours
Color Temperature -色溫 Temperatura del color	2700K/3000K / 4000K / 5000K
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	50 Lm/w(3000K), 55 Lm/w(4000K),
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	140 Lm/w(3000K), 150 Lm/w(4000K),
Housing materials-外殼材料 Materiales de la carcasa	Die-cast aluminium with Tempered Glass 壓鑄鋁和鋼化玻璃 Aluminio fundido a presión con vidrio templado
Housing Color 外殼顏色/color de la carcasa	Polyester powders Coating: White RAL 9016 / Black RAL 9005 / Dark Grey RAL7012 / Light Grey RAL 7047/ Silver Grey RAL 7047 聚酯粉末塗料：白色 RAL 9016 / 黑色 RAL 9005 / 深灰色 RAL7012 / 淺灰色 RAL 7047 / 銀灰色 RAL 7047 Revestimiento de polvos de poliéster: Blanco RAL 9016 / Negro RAL 9005 / Gris oscuro RAL7012 / Gris claro RAL 7047 / Gris plata RAL 7047
Ingress Protection-防護等級 Protección de ingreso	IP65
Mech impact protection 機械衝擊保護 Protección contra impactos mecánicos	IK08
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C / +50 °C
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: LVD: IEC/EN 60598-1;EN / IEC/EN 60598-2-2;IEC62471;IEC/EN 62031; IEC/EN 62493 ; IEC/EN 62471 (Risk Group 1) • LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; • IEC/EN 61000-3-3;IEC/EN61574;EN 55015 ; IEC /EN 62384

Certification-認證-Certificación



Project	Fixture#	Date
		Firm


Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [WIDE-5W](#)

WIDE - 5W
Power Consumption



Power Consumption	
Code	Description
5W	5W

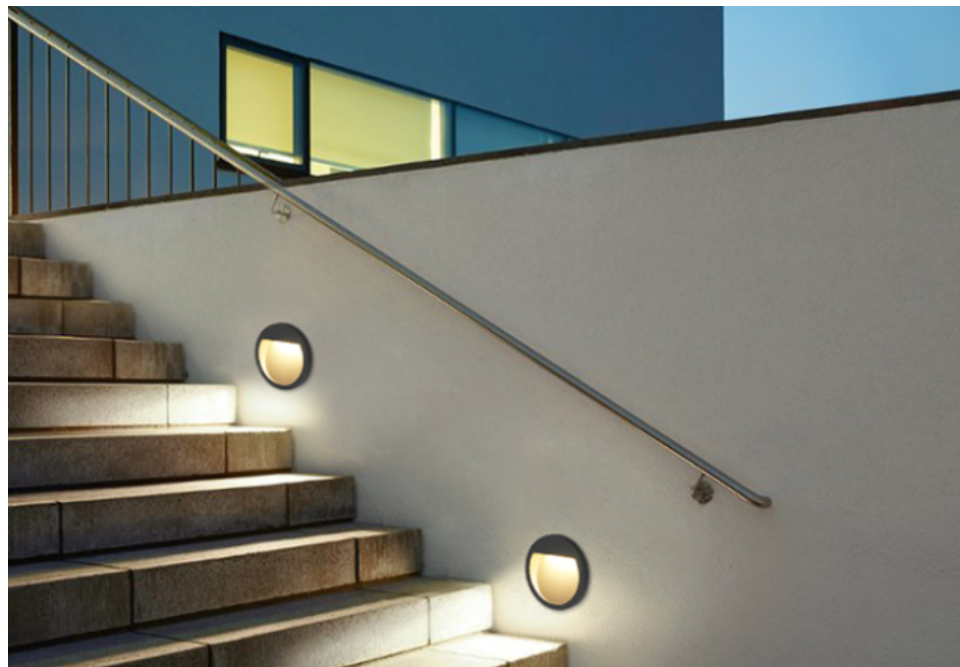

BEAM ANGLE

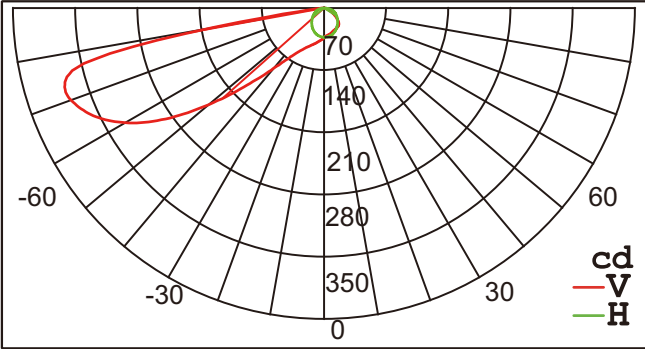

Technical Drawing

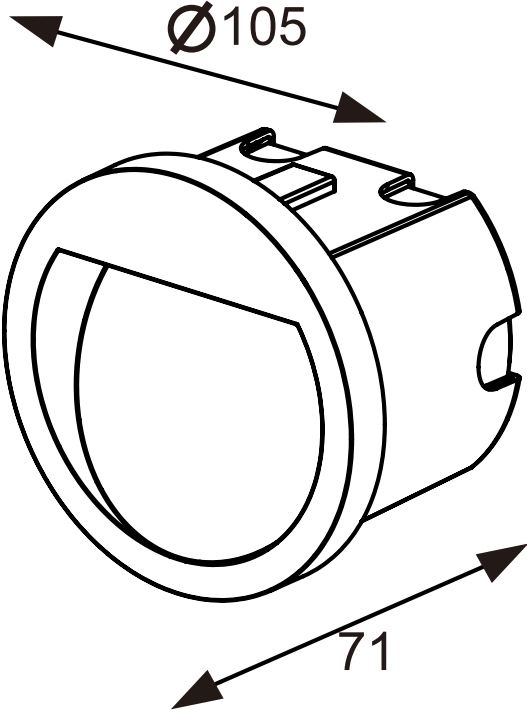

Unit: mm