


WOYE-L



- Body and bracket in die-cast aluminium with Anti UV Clear PC Lens
- Corrosion -resistance Powder coated
- Ingress Protection: IP66 and IK10 impact protection
- ABS plastic recessed housing.
- Integrated-Type 1-10V, DALI Dimming LED Driver

Technical Data

Luminaire Type-安裝方式 Tipo de luminaria	Recessed Wall Light Type / 嵌入式燈具 / Tipo de Recessed
Dimension / 尺寸 / Dimensión	W: 250 x H: 87 x D: 73 mm
Input Voltage / 輸入電壓 / Voltaje de entrada	AC220-240V 50/60HZ
Power Consumption / 燈具功率 Consumo de energía	6W 8W
LED Driver Type / LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. On/Off Switch AC220-240V 50/60HZ 2. 0/1 -10V Dimming Driver AC220-240V 50/60HZ 3. DALI Dimming Driver AC220-240V 50/60HZ
Control Protocol / 控制協議 Protocolo de Control	0/1-10V / DALI
Total Harmonic Distortion / 總諧波失 Distorsión armónica total	THD<20%
Power Factor / 功率因數 / Factor de potencia	PF>0.9
Beam Angle / 光束角 / ángulo de haz	Asymmetric
Light Source Brand / 光源品牌 / Fuente de luz de marca	LUMILEDS / CREE / Osram
Lumen Maintenance LM-80 Reported by TM-21	L70> 54,000 hrs
LED Life / LED壽命 / La vida del LED	>100,000 hours
Color Temperature / 色溫 Temperatura del color	3000K / 4000K / 5000K / 6500K
Color Rendering Index / 顯色指數 Índice de reproducción cromática	> 80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning ellipse	Standard Deviation Colour Matching < 3 SDCM標準偏差配色< 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy / 燈具效率 La eficacia de la luminaria	25 LM/W (3000K) 25 LM/W (4000K) 30 LM/W (5000K) 30 LM/W (6500K)
LED Source Luminous Efficacy / LED光源光效 Fuente luminosa LED Eficacia	130 LM/W (3000K) 130 LM/W (4000K) 140 LM/W (5000K) 140 LM/W (6500K)
Housing materials / 外殼材料 Materiales de la carcasa	Die-cast aluminium housing with polycarbonate diffuser / 壓鑄鋁外殼, 附聚碳酸酯擴散器 Carcasa de aluminio fundido a presión con difusor de policarbonato
Housing Color / 外殼顏色 / color de la carcasa	Sand White / Bluish Gray 砂白 / 青灰色 Arena blanca / gris azulado
Ingress Protection / 防護等級 Protección de ingreso	IP66
Impact protection / 衝擊保護 Protección contra impactos	IK10
Operating Humidity / 工作濕度 Humedad de funcionamiento	0~100%, non-condensing-不結霜 sin condensación
Operating Temperature / 工作溫度 Temperatura de funcionamiento	-20 °C / +45 °C
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaries: LVD: IEC/EN 60598-1;EN / IEC/EN 60598-2-2;IEC62471;IEC/EN 62031; IEC/EN 62493 ; IEC/EN 62471 (Risk Group 1) • LED Driver: IEC/EN 61347-1; IEC/EN 61347-2-13; IEC/EN 62384; IEC/EN 61000-3-2; • IEC/EN 61000-3-3;IEC/EN61574;EN 55015 ; IEC /EN 62384
Certification / 認證 / Certificación	      

Project	Fixture#	Date
		Firm

Ordering Information

Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.


Example product code: [WOYE-L-8W](#)


WOYE-L - -
[Power Consumption](#)

Power Consumption	
Code	Description
6W	6W
8W	8W



Beam Angle

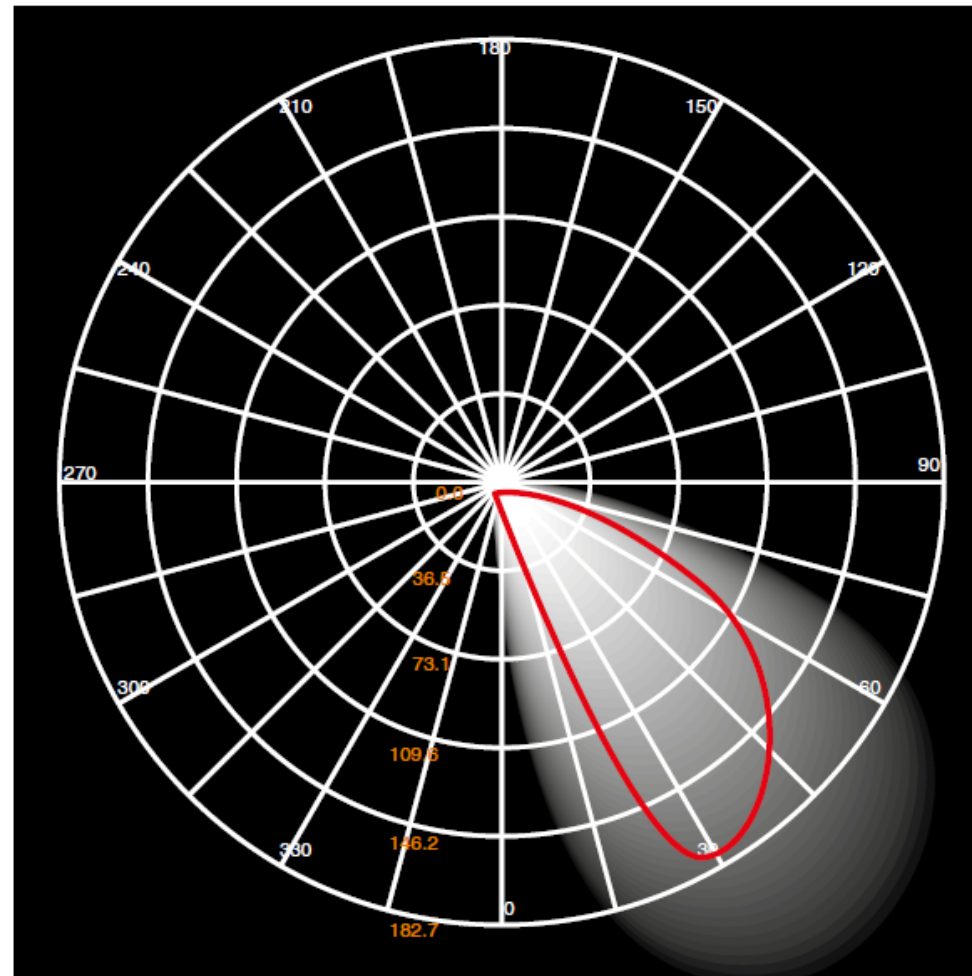

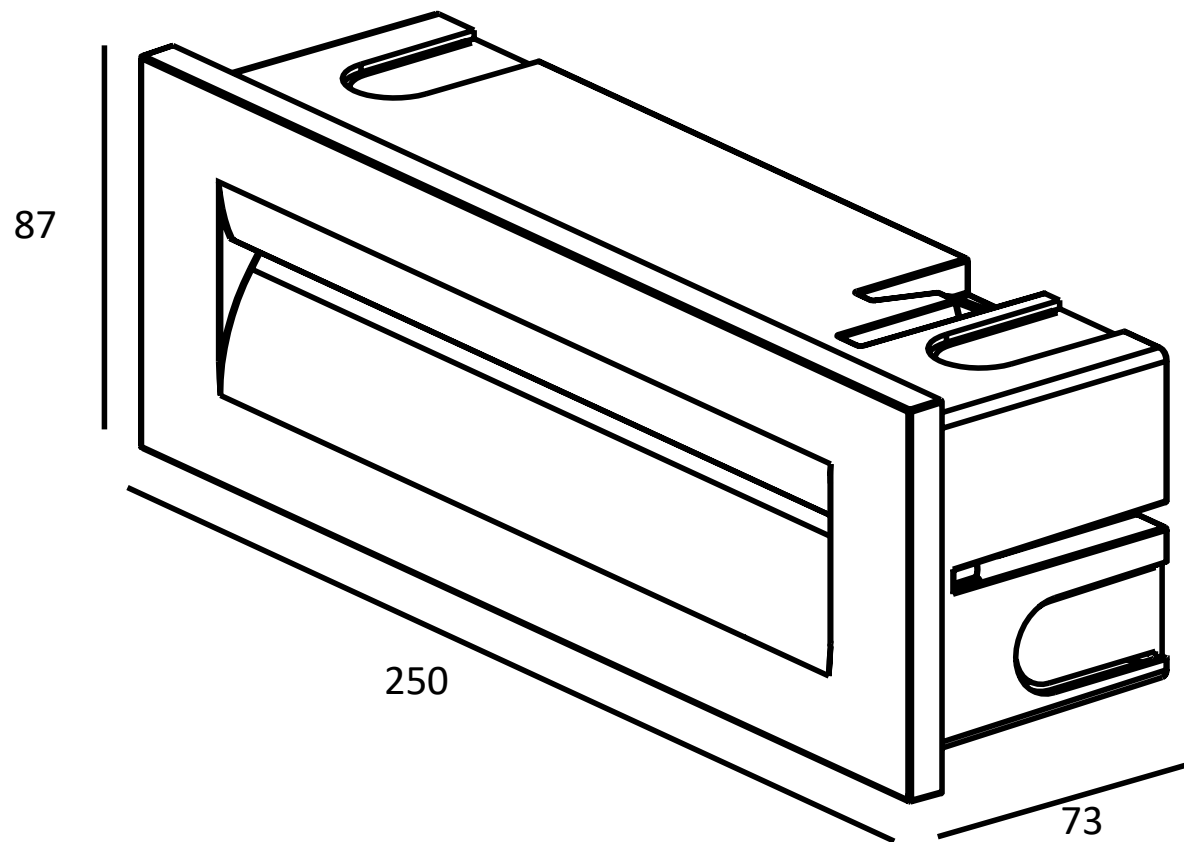

Installation Menu

