


WUDY

LED Wall Light IP65

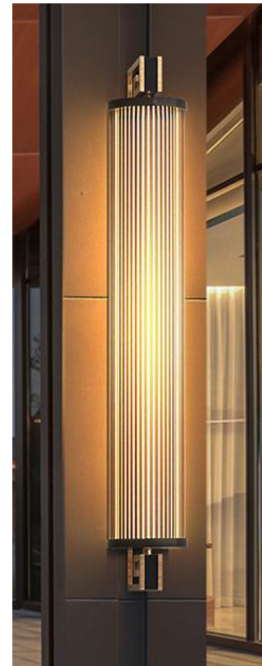


LED wall light
Finishes Material: Stainless Steel + Glass
IP Rating: IP65

Technical Data

Luminaire Type-安裝方式 Tipo de luminaria	LED Wall Mounting
Dimension-尺寸-Dimensión / mm	Dia : 150 x H: 650mm
Input Voltage-輸入電壓-Voltaje de entrada	AC 220-240V 50/60Hz
Power Consumption Max-燈具功率 Consumo de energía Max	18W
LED Driver Type LED驅動款式 Tipo de controlador LED	Integrated-type LED Driver--Refer to LED driver specification 請參閱LED驅動器規格 Consulte la especificación de controlador de LED 1. ON/OFF Switch AC220-240V 50/60HZ 2. 0-10V Dimming Driver AC220-240V 50/60HZ 3. Dali Dimming Driver AC220-240V 50/60HZ
LED Driver Features 驅動特性 Funciones del controlador de LED	POWER FACTOR : PF>0.90 @ Full Load TOTAL HARMONIC DISTORTION: THD< 20%
Control Protocol-控制協議 Protocolo de Control	1-10V / Dali
Beam Angle 光束角 ángulo de haz	220°
Light Source Brand-光源品牌-Fuente de luz de marca	OSRAM - (Photobiological safety-IEC 62471 'Risk Group 1' (low risk))
"Lumen Maintenance LM-80 Reported by TM-21"	1. L90(10k) = 50,700 hrs 2. L80(10k) > 63,500 hrs 3. L70(10k) > 63,500 hrs
LED Life-LED壽命-La vida del LED	>60,000 hours
Color Temperature -色溫 Temperatura del color	2700K / 3000K / 4000K / 5000K / 6500K
Color Rendering Index-顯色指數 Índice de reproducción cromática	> 80
MacAdam Ellipses Binning 麥克亞當橢圓分級 Mac Adam binning elipse	Standard Deviation Colour Matching < 3 SDCM 標準偏差配色 < 3 SDCM Coincidencia de color estándar Desviación < 3 SDCM
Luminaire Efficacy 燈具效率 La eficacia de la luminaria	90Lm/w(2700K), 100 Lm/w(3000K), 110 Lm/w(4000K), 120 Lm/w(5000K), 120 Lm/w(6500K)
LED Source Luminous Efficacy LED光源光效 Fuente luminosa LED Eficacia	120Lm/w(2700K), 130 Lm/w(3000K), 140 Lm/w(4000K), 150 Lm/w(5000K), 150 Lm/w(6500K)
Housing materials-外殼材料 Materiales de la carcasa	Body: Glass Diffuser: Clear Glass
Ingress Protection-防護等級 Protección de ingreso	IP65
Operating Temperature Range / 工作溫度範圍 Rango de temperatura de funcionamiento	-30 °C To +50 °C
Operating Humidity -工作濕度 Humedad de funcionamiento	0~90%, non-condensing-不結霜 sin condensación
Comply Testing Standard 符合測試標準 Cumplir el estándar de prueba	LED Luminaires: IEC/EN60598-1 ; EN60598-2-1 ; IEC/EN 62031 ; IEC/EN 62493; IEC TR62778 ; IEC62471; RoHS LED Driver: EN 55015 / EN 61000-3-2 / EN 61347-1 / EN 61347-2-13 / EN 61547 / EN 62384

Certification



Project	Fixture#	Date
		Firm



Ordering Information


Choose the option that suits your need and write its corresponding code on the appropriate line to form the product code.

Example product code: [WUDY-18W](#)

WUDY - 18W
[Lamp Sources](#)

Lamp Sources	
Code	Description
18W	18W

Technical Drawing

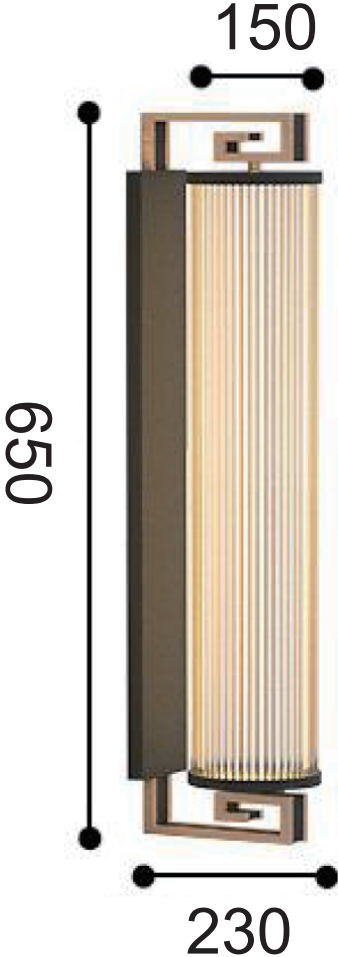

Unit: mm